Light efficiency:

143 Lumen/Watt

Light quality:


CRI: 82,1


Color temperature:

2700 K

Output: 1642 lm
Peak: 567 cd

Power: 11,5 W
PF: 1,0

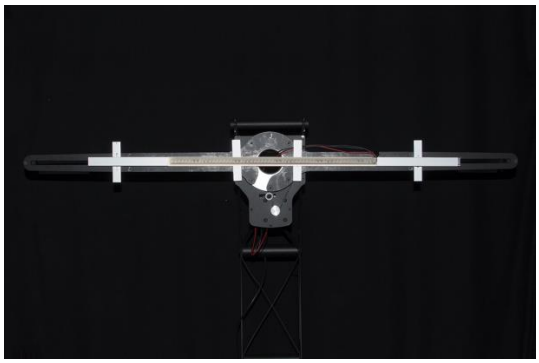

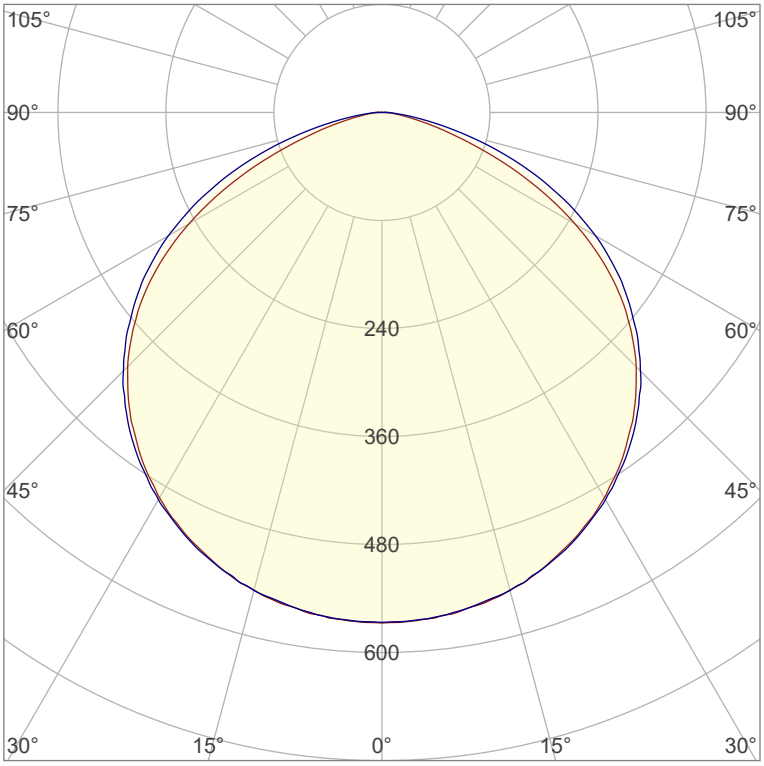

Product name:
Nova-6_510mm_827_Cover-Flat-Transparent


Item number:
NP/L1C/06F/0510/827/CFT

Date and time:
18.07.2022 10:02:12


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,460
y: 0,411


Spectra

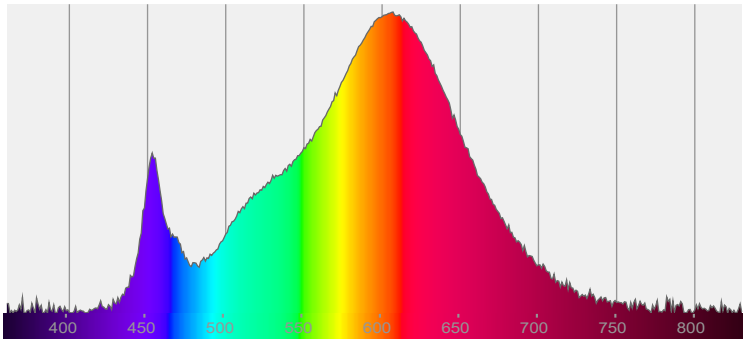


Power

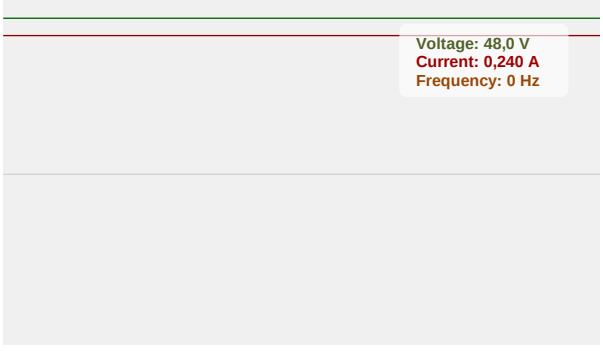

Color details

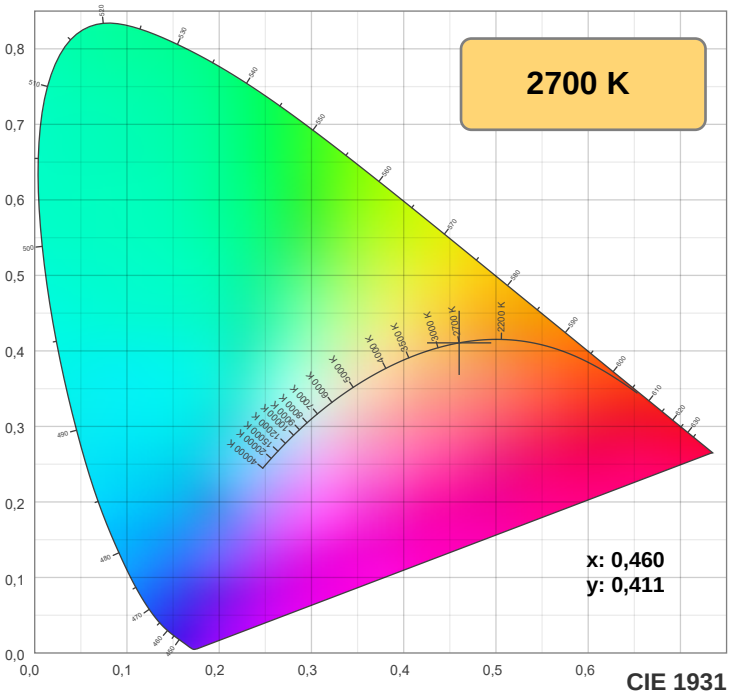


CIE 1931

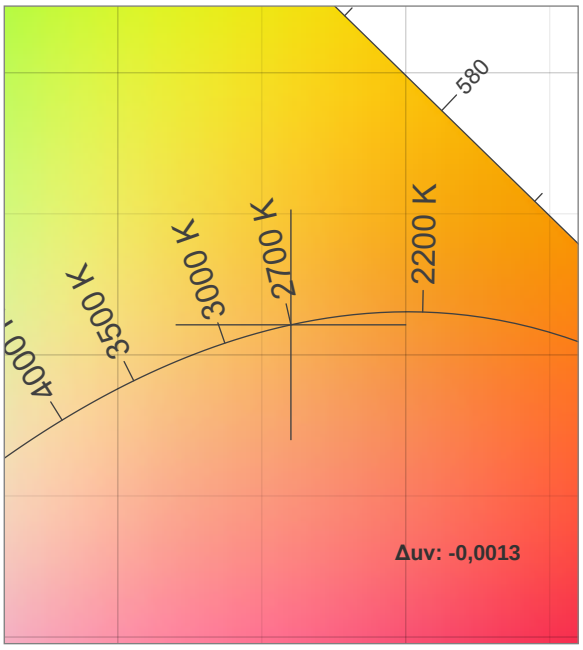


CIE 1931 ZOOM

TM30: 84,1

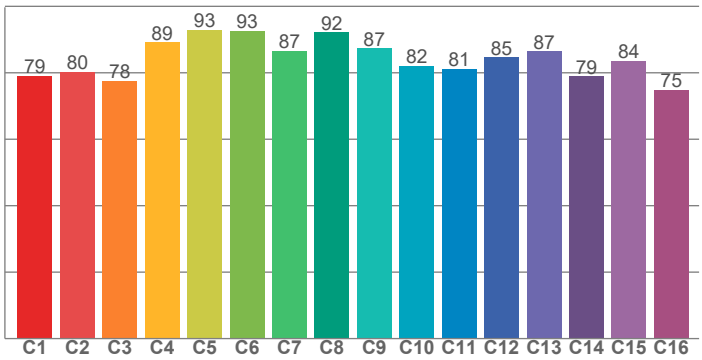

CRI: 82,1 (R1-R8)

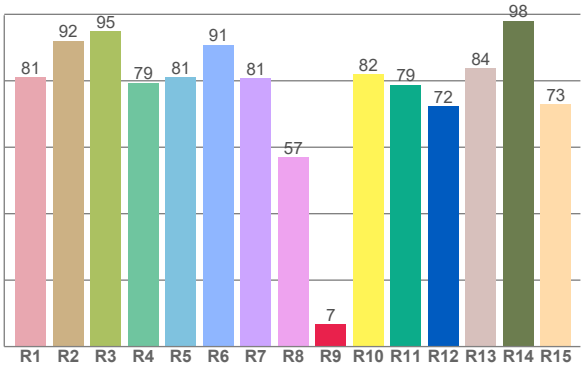

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81,0	92,1	94,9	79,4	81,0	90,8	80,8	56,9	6,8	82,0	78,8	72,4	83,8	98,1	72,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
79,0	80,3	77,5	89,2	92,9	92,7	86,6	92,1	87,4	82,1	81,1	84,6	86,5	78,9	83,5	74,9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77,0	93,8	82,2	78,3	81,6	82,6	81,8	83,8	94,2	89,3	85,3	82,0	81,0	71,1	72,9

CQS: 81,2

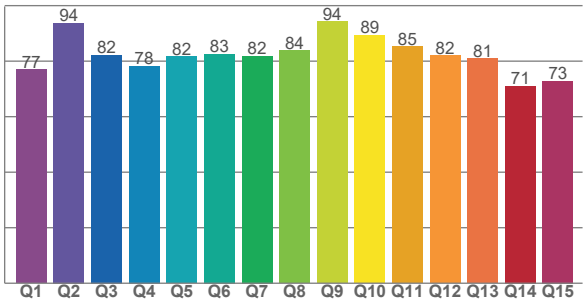

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	82,1	6,8	84,1	95,6	81,2	0,460	0,411	0,263	0,352	-0,0013

TM30 details


Rf 84,1


Fidelity index Rf


Rg 95,6


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	79	-12%	1%
2	80	-8%	7%
3	78	-3%	12%
4	89	0%	6%
5	93	2%	4%
6	93	2%	-3%
7	87	-5%	-6%
8	92	-4%	-1%
9	87	-6%	4%
10	82	-4%	11%
11	81	1%	14%
12	85	7%	2%
13	87	5%	-9%
14	79	5%	-17%
15	84	-4%	-9%
16	75	-9%	-17%

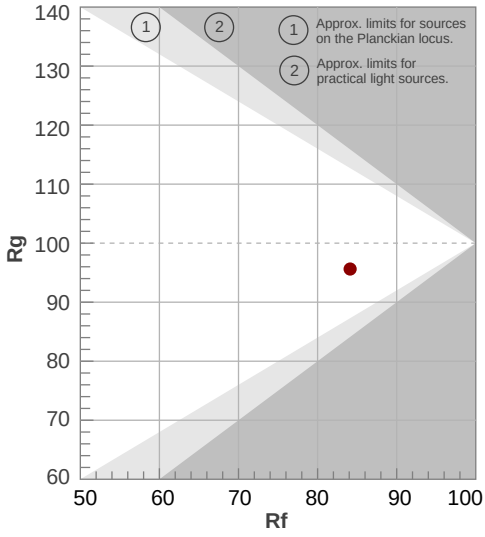


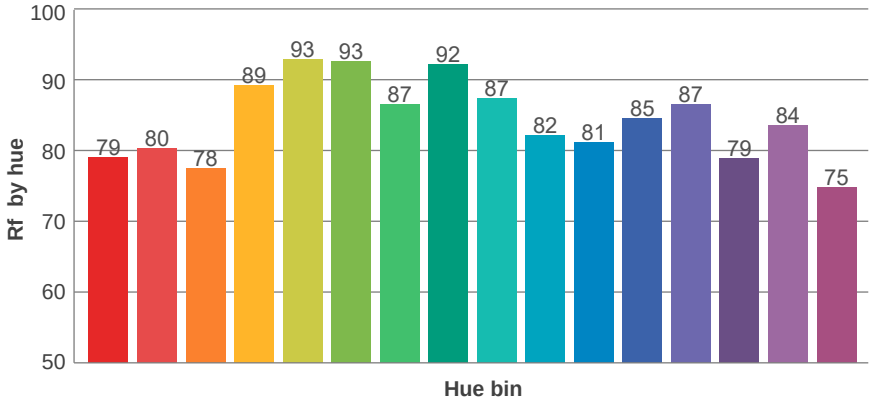

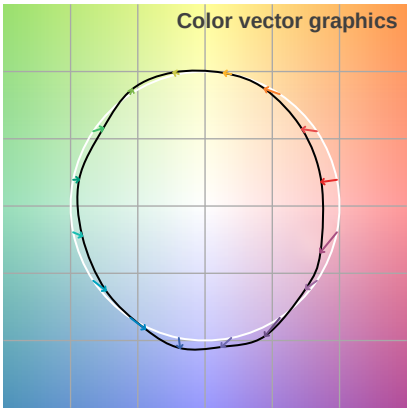


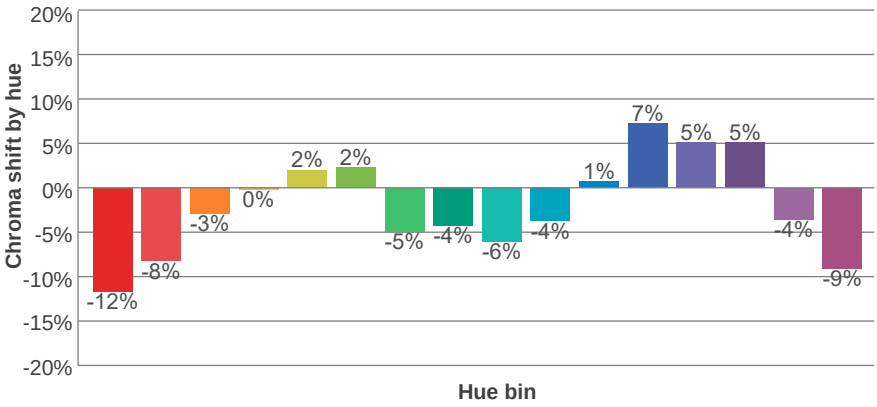

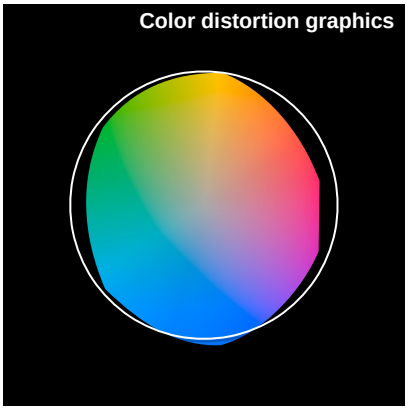

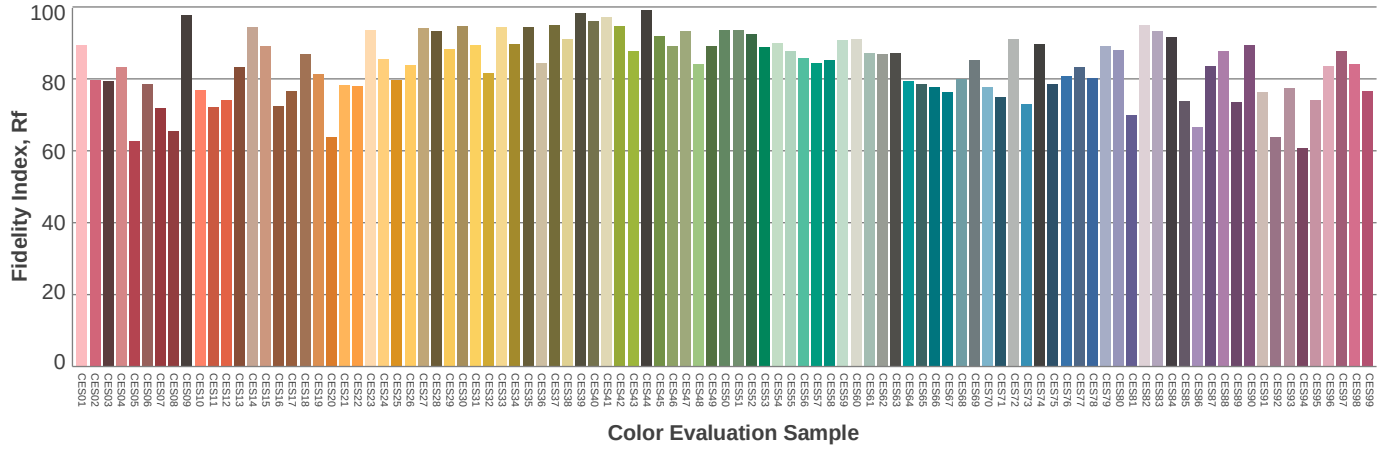

Beam details

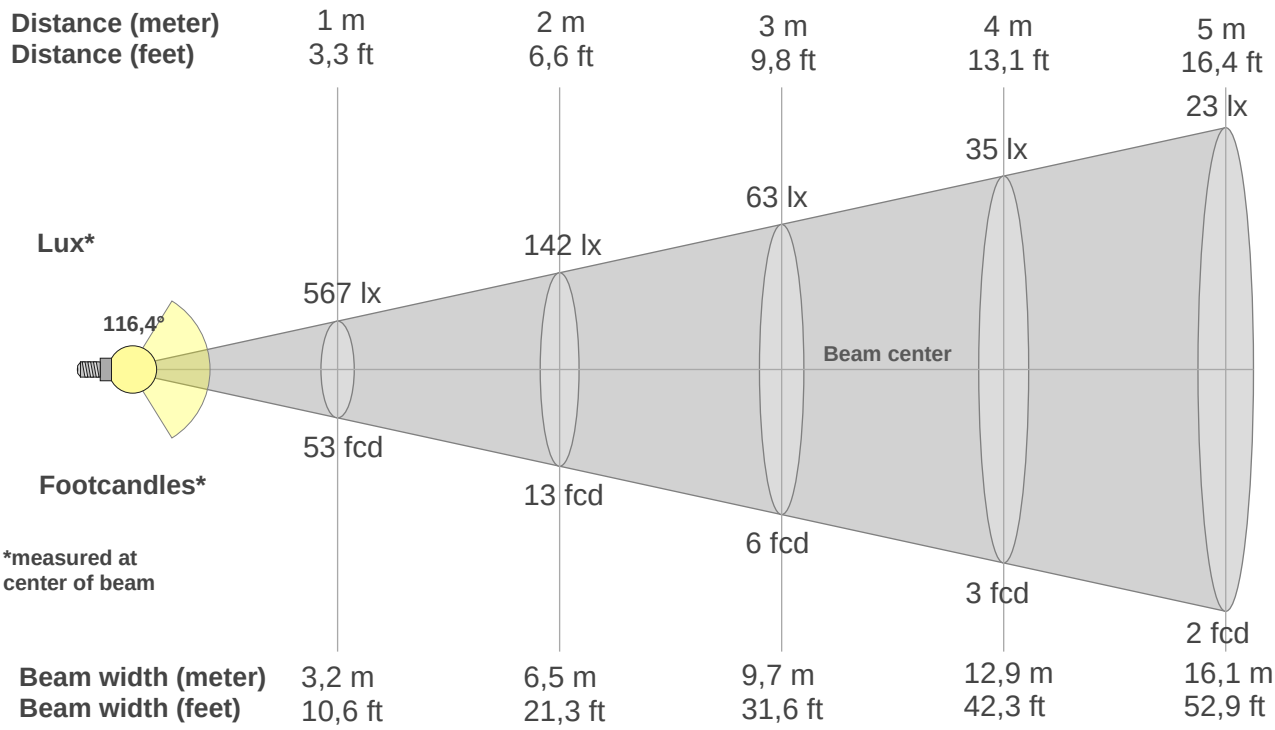

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
567lx	142lx	63lx	35lx	23lx	16lx	12lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx
52,7fcd	13,2fcd	5,9fcd	3,3fcd	2,1fcd	1,5fcd	1,1fcd	0,8fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
567	565	559	549	535	517	494	467	435	399	357	307	248	181	114	61	28	12	3	0
100%	100%	99%	97%	94%	91%	87%	82%	77%	70%	63%	54%	44%	32%	20%	11%	5%	2%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
567	565	559	550	536	518	497	471	441	406	367	324	274	217	157	97	48	18	3	0
100%	100%	99%	97%	94%	91%	88%	83%	78%	72%	65%	57%	48%	38%	28%	17%	8%	3%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
567	565	559	549	535	517	494	467	435	399	357	307	248	181	114	61	28	12	3	0
100%	100%	99%	97%	94%	91%	87%	82%	77%	70%	63%	54%	44%	32%	20%	11%	5%	2%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
567	565	559	550	536	518	497	471	441	406	367	324	274	217	157	97	48	18	3	0
100%	100%	99%	97%	94%	91%	88%	83%	78%	72%	65%	57%	48%	38%	28%	17%	8%	3%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116,4°	**154,4°**	**170,7°**	**81,3%**	**54,7%**

ISO candela diagram

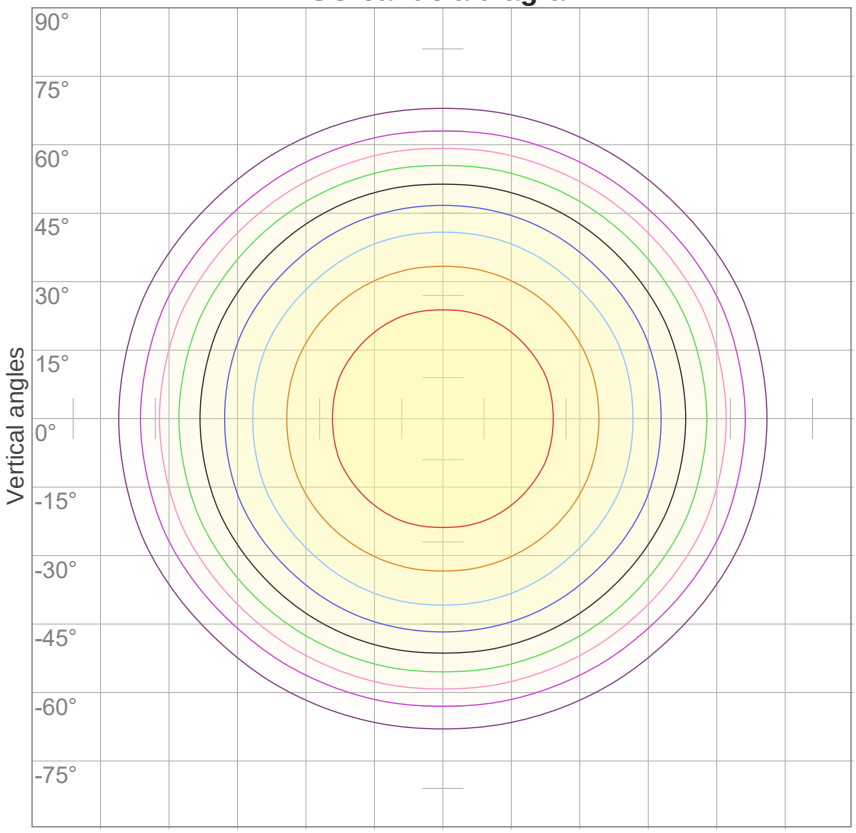


10%	57 cd
20%	113 cd
30%	170 cd
40%	227 cd
50%	283 cd
60%	340 cd
70%	397 cd
80%	453 cd
90%	510 cd

Conditions:

Number of c-planes: 16

Candela at center: 567 cd

ISO lux diagram

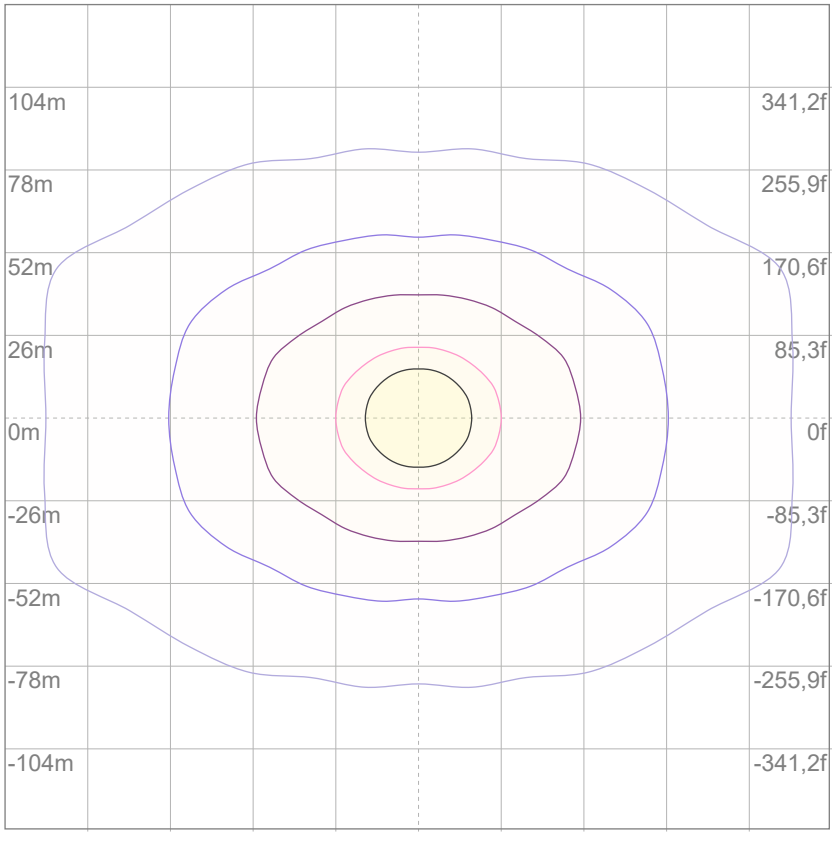

Mounting height: 10 meters (33 feet)

3%	0,170 lx
5%	0,283 lx
10%	0,567 lx
30%	1,70 lx
50%	2,83 lx

Conditions:

Number of c-planes: 16

Lux at center: 5,67 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	25,2	26,4	25,5	26,7	26,9	26,1	27,3	26,3	27,6	27,8
	3H	26,0	27,2	26,4	27,5	27,7	27,4	28,7	27,8	28,9	29,1
	4H	26,2	27,3	26,6	27,6	27,9	27,9	29,0	28,3	29,3	29,6
	6H	26,3	27,3	26,6	27,6	28,0	28,2	29,2	28,5	29,5	29,8
	8H	26,2	27,2	26,6	27,6	28,0	28,2	29,2	28,5	29,5	29,9
	12H	26,2	27,2	26,6	27,5	28,0	28,2	29,2	28,6	29,5	29,9
4H	2H	25,8	27,0	26,2	27,2	27,5	26,5	27,7	26,9	27,9	28,2
	3H	26,8	27,8	27,2	28,1	28,6	28,1	29,0	28,4	29,4	29,8
	4H	26,9	27,8	27,4	28,3	28,8	28,5	29,4	28,9	29,8	30,3
	6H	27,0	27,9	27,5	28,2	28,6	28,8	29,7	29,3	30,0	30,4
	8H	27,0	27,8	27,5	28,2	28,5	28,9	29,6	29,4	30,0	30,4
	12H	27,0	27,6	27,5	28,1	28,5	28,9	29,5	29,4	30,0	30,4
8H	4H	27,1	27,9	27,6	28,2	28,6	28,5	29,3	29,0	29,7	30,1
	6H	27,2	27,8	27,7	28,3	28,8	28,9	29,5	29,4	30,0	30,5
	8H	27,3	27,8	27,8	28,3	28,9	29,0	29,6	29,6	30,1	30,7
	12H	27,3	27,7	27,9	28,2	28,8	29,1	29,5	29,7	30,0	30,6
12H	4H	27,1	27,7	27,6	28,1	28,6	28,5	29,1	29,0	29,6	30,0
	6H	27,3	27,8	27,8	28,3	28,9	28,9	29,4	29,4	29,9	30,6
	8H	27,3	27,7	27,9	28,2	28,8	29,0	29,5	29,6	30,0	30,6
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,1 / -0,1				
S = 1.5H		0,4 / -0,7					0,2 / -0,3				
S = 2.0H		1,1 / -1,5					0,7 / -1,0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1642 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	106	102	99	95	98	95	92	94	92	89	90	88	87	84
2	99	91	85	79	97	90	83	78	86	81	76	83	78	75	80	76	73	71
3	91	80	72	66	88	79	71	65	76	69	64	73	68	63	70	66	62	60
4	83	71	62	56	81	70	62	55	67	60	55	65	59	54	63	57	53	51
5	76	63	55	48	74	62	54	48	60	53	47	58	52	47	56	51	46	44
6	70	57	48	42	68	56	48	42	54	47	41	53	46	41	51	45	40	38
7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	40	36	34
8	61	47	39	33	59	46	38	33	45	38	32	44	37	32	43	37	32	30
9	57	43	35	29	55	43	35	29	41	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	27	38	31	26	37	31	26	36	30	26	24

Luminaire budgetary diagram

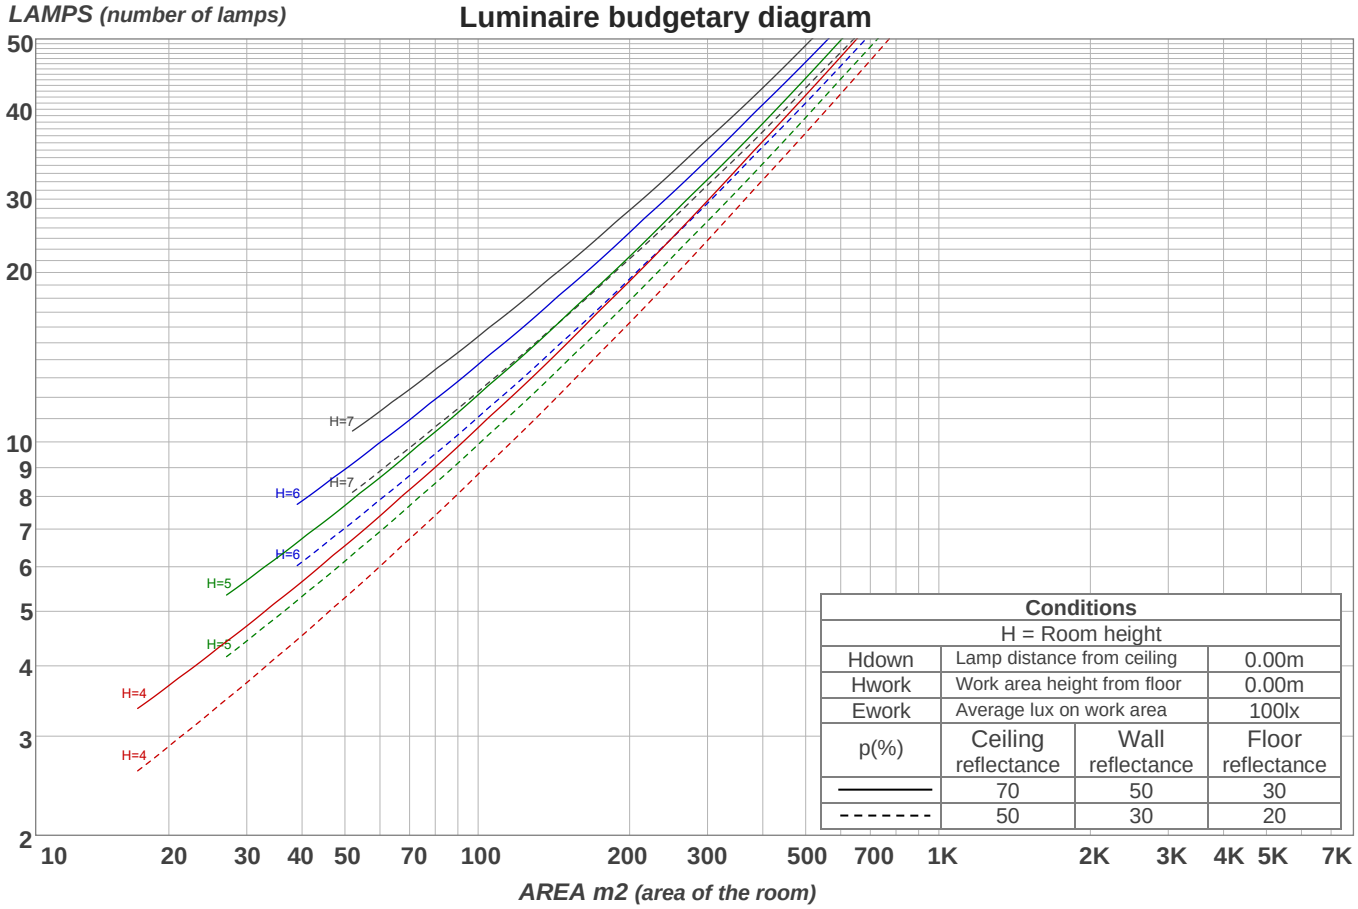


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
53,8 lm	155 lm	239 lm	294 lm	311 lm	282 lm	198 lm	84,9 lm	18,8 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2,18 lm	0,846 lm	0,684 lm	0,618 lm	0,526 lm	0,421 lm	0,310 lm	0,190 lm	0,064 lm

Warmup curve

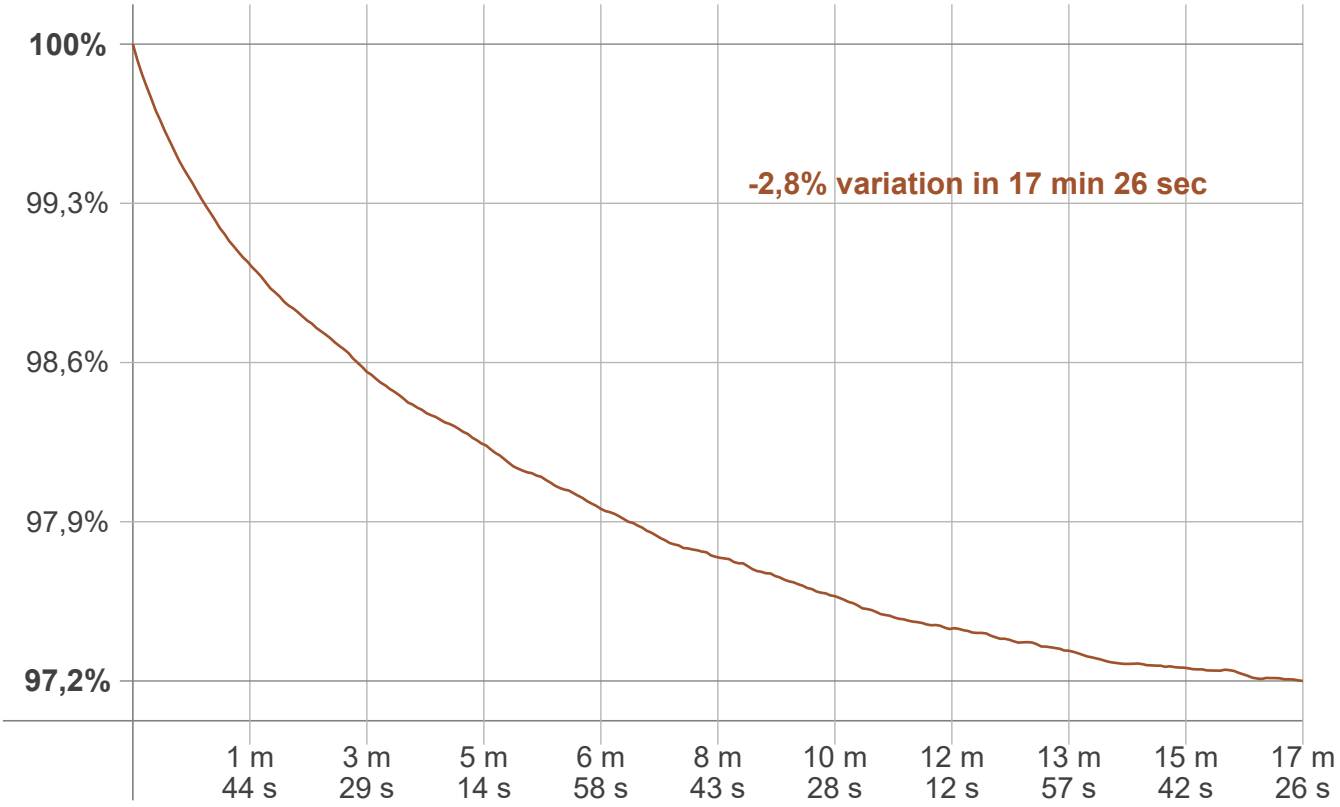

Warmup result

Warmup time:	**Lamp stabilized in 17 min 26 sec**
Warmup variation	**-2,8%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2695 K	+5 K	2700 K

Output change

Output start	Output change	Output end
1695 lm	-53 lm	1642 lm