Light efficiency:

71 Lumen/Watt

Light quality:


CRI: 81,8


Color temperature:

2700 K

Output: 821 lm
Peak: 265 cd

Power: 11,5 W
PF: 1,0

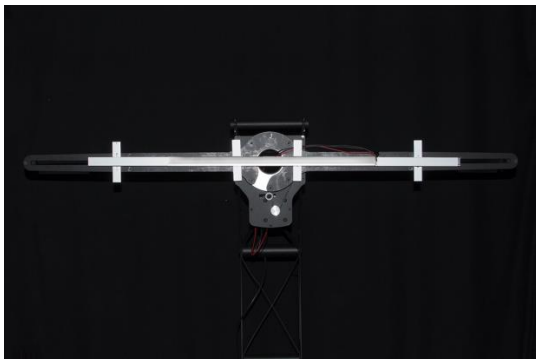

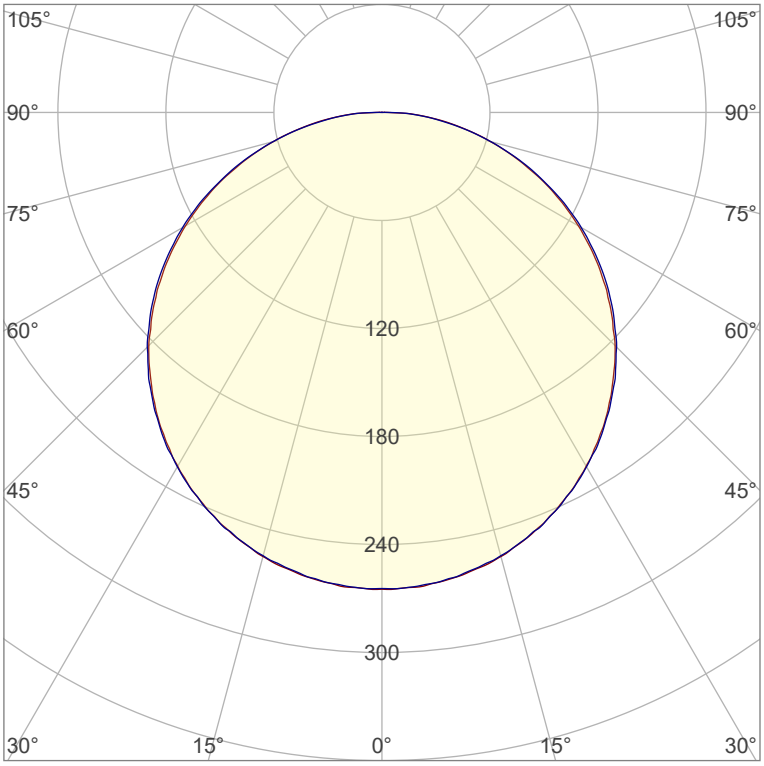

CIE 1931
x: 0,460
y: 0,411


Product name:
Nova-6_510mm_827_Cover-Flat-White

Item number:
NP/L1C/06F/0510/827/CFW


Date and time:
15.07.2022 11:26:25

Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein


Spectra

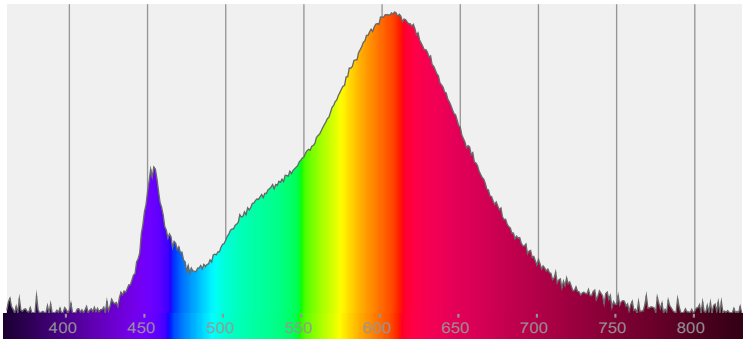


Power

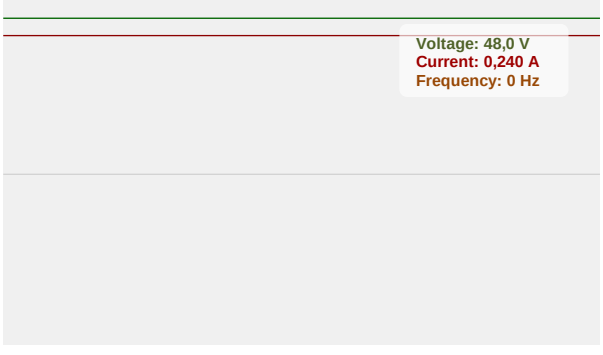

Color details

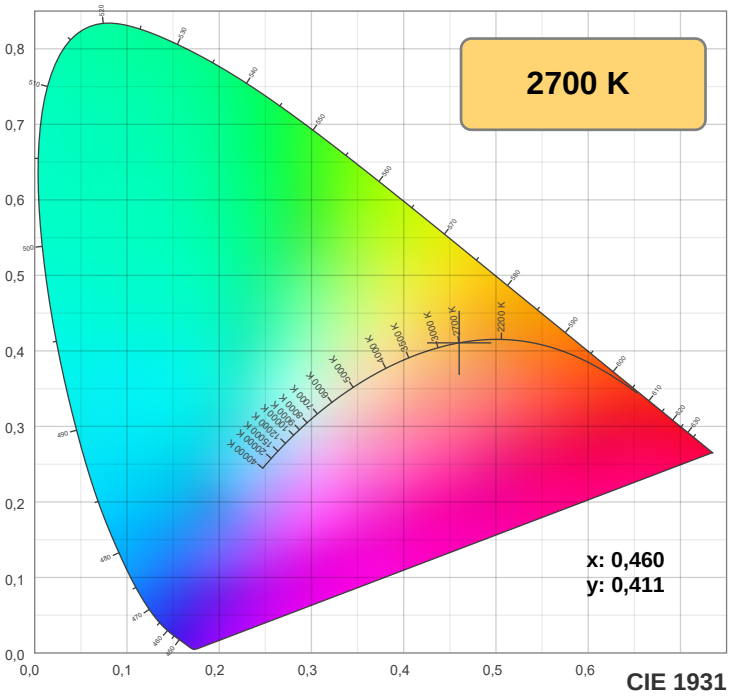


CIE 1931

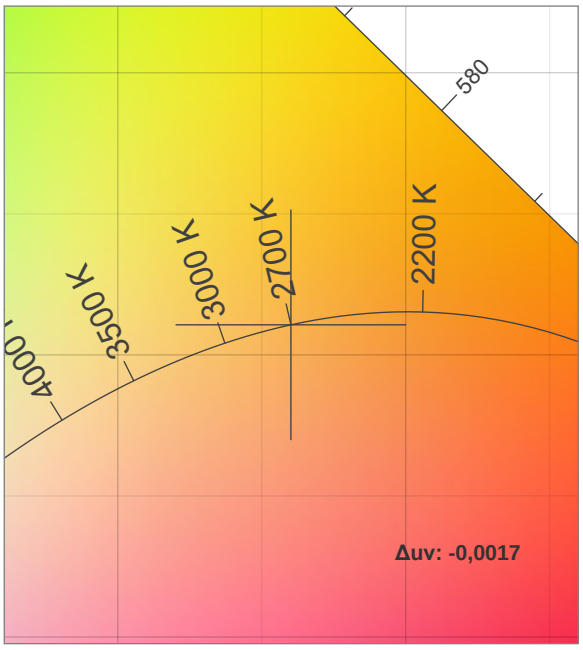


CIE 1931 ZOOM

TM30: 83,8

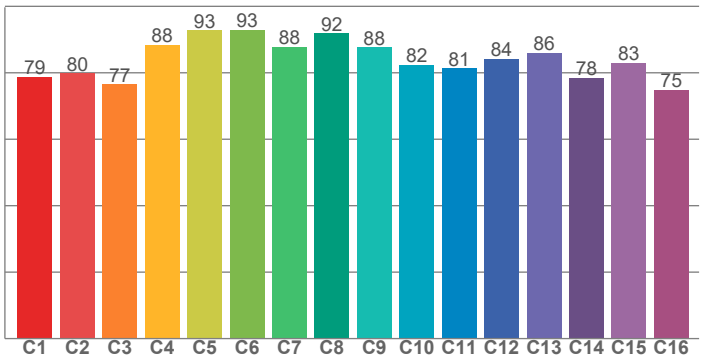

CRI: 81,8 (R1-R8)

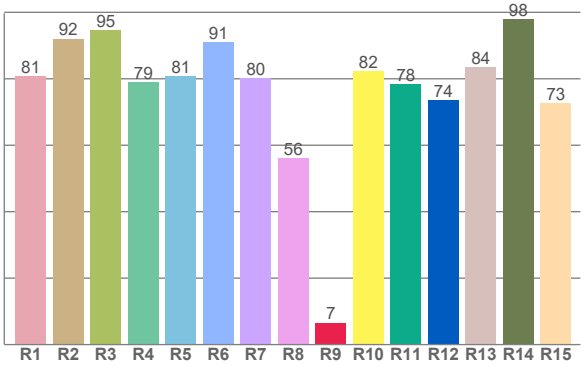

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,7	92,1	94,5	78,9	80,8	91,1	80,2	56,2	6,6	82,3	78,3	73,6	83,5	97,9	72,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78,8	79,8	76,6	88,3	92,8	92,9	87,9	91,9	87,6	82,5	81,3	84,2	85,9	78,5	83,1	74,9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76,3	93,3	82,0	78,1	81,4	82,2	80,8	82,6	93,5	88,8	84,6	81,1	80,3	71,0	72,5

CQS: 80,7

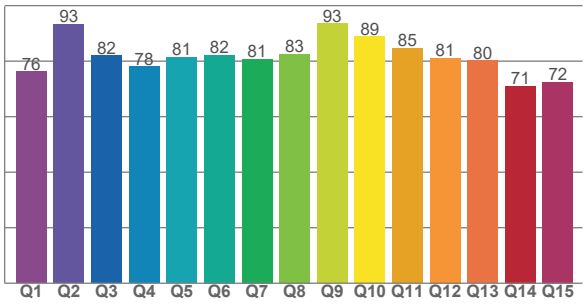

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	81,8	6,6	83,8	96,1	80,7	0,460	0,411	0,263	0,352	-0,0017

TM30 details


Rf 83,8


Fidelity index Rf


Rg 96,1


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	79	-12%	1%
2	80	-8%	8%
3	77	-3%	12%
4	88	0%	6%
5	93	3%	4%
6	93	4%	-2%
7	88	-3%	-7%
8	92	-4%	-2%
9	88	-6%	4%
10	82	-4%	11%
11	81	0%	14%
12	84	7%	2%
13	86	6%	-9%
14	78	5%	-17%
15	83	-3%	-10%
16	75	-9%	-17%

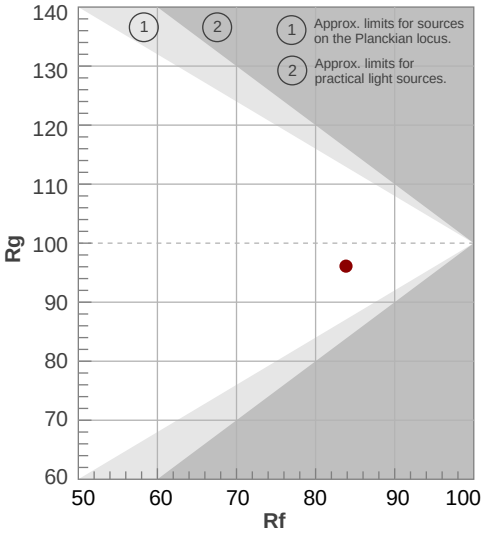


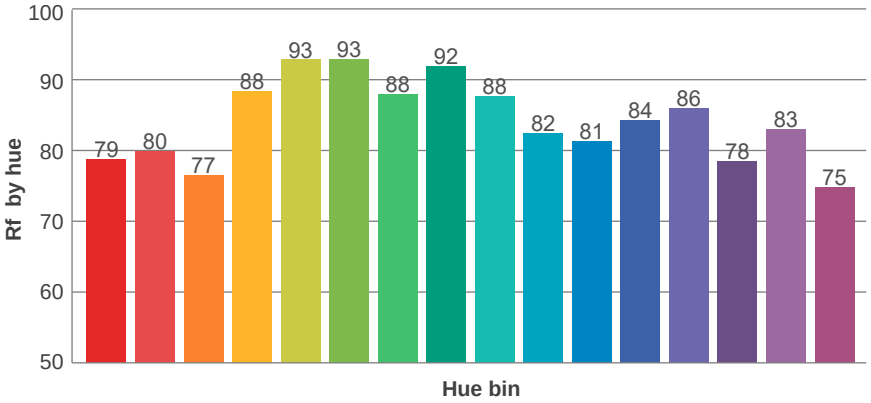

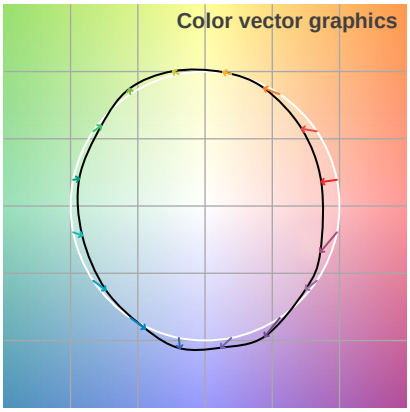


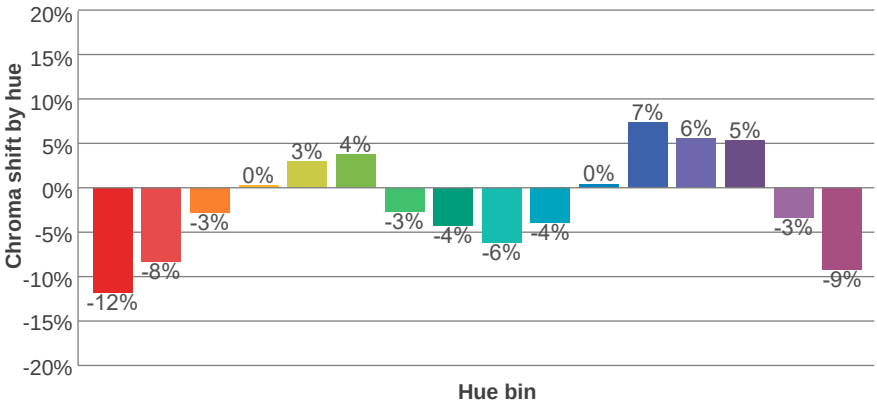

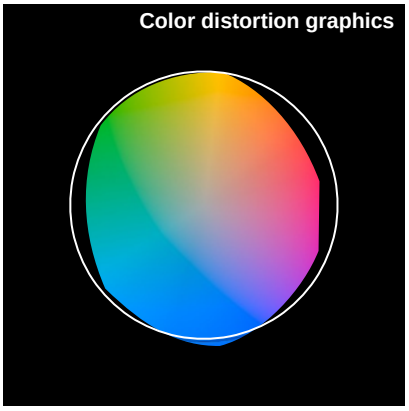

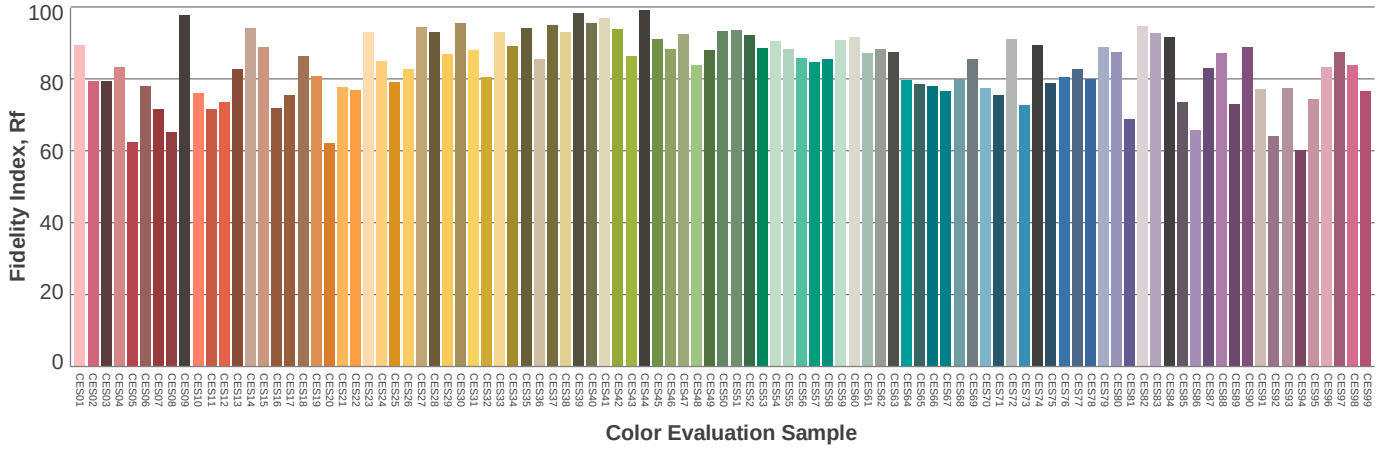

Beam details

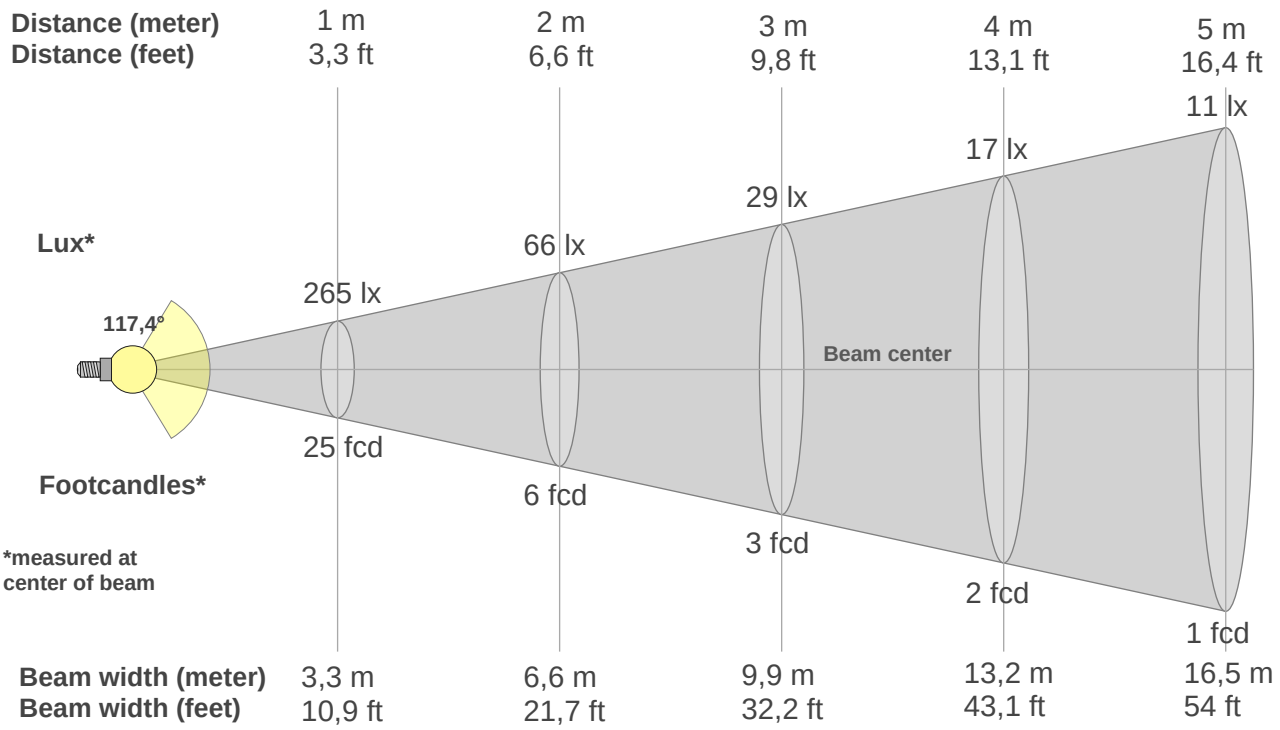

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
265lx	66lx	29lx	17lx	11lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx
24,6fcd	6,1fcd	2,7fcd	1,5fcd	1fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
265	264	261	255	248	238	227	214	199	183	165	146	126	105	84	62	42	23	3	0
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	55%	48%	40%	32%	24%	16%	9%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
265	263	260	255	247	238	227	215	200	184	167	148	128	106	85	62	41	22	3	0
100%	100%	98%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	15%	8%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
265	264	261	255	248	238	227	214	199	183	165	146	126	105	84	62	42	23	3	0
100%	100%	98%	96%	94%	90%	86%	81%	75%	69%	62%	55%	48%	40%	32%	24%	16%	9%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
265	263	260	255	247	238	227	215	200	184	167	148	128	106	85	62	41	22	3	0
100%	100%	98%	96%	94%	90%	86%	81%	76%	70%	63%	56%	48%	40%	32%	24%	15%	8%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
117,4°	**167,9°**	**178,9°**	**74,9%**	**50,2%**

ISO candela diagram

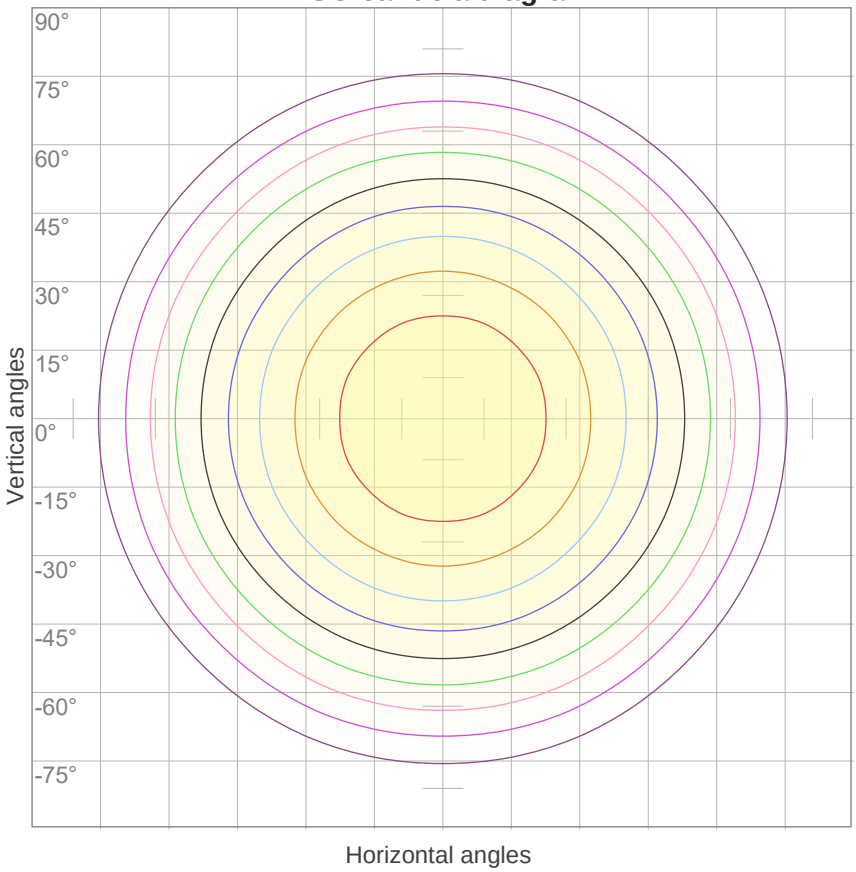


10%	26 cd
20%	53 cd
30%	79 cd
40%	106 cd
50%	132 cd
60%	159 cd
70%	185 cd
80%	212 cd
90%	238 cd

Conditions:

Number of c-planes: 16

Candela at center: 265 cd

ISO lux diagram

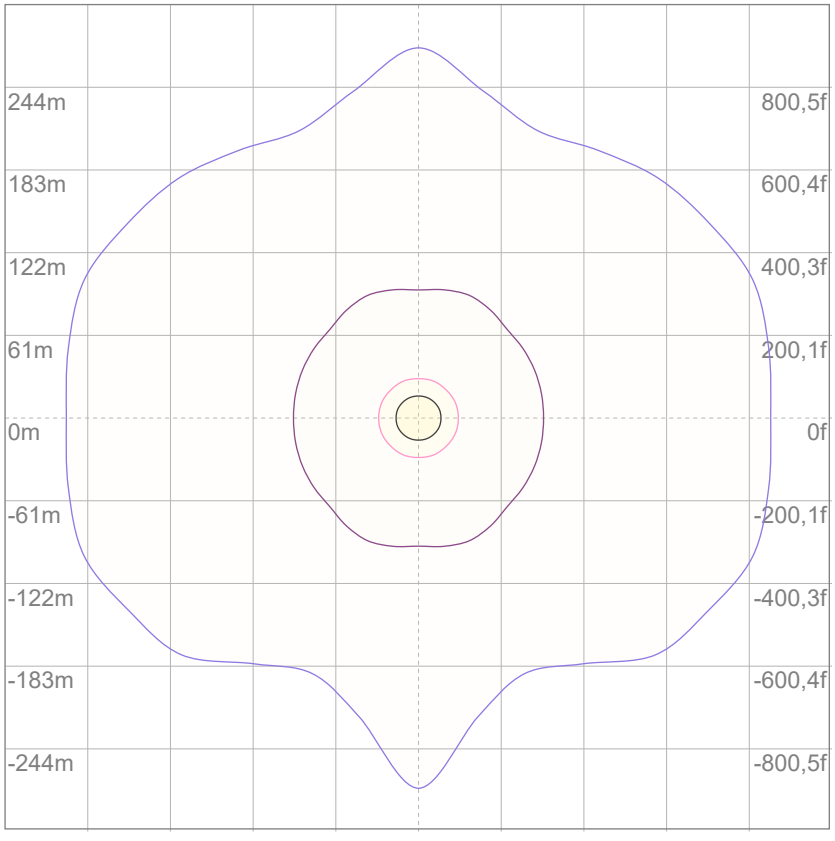

Mounting height: 10 meters (33 feet)

3%	79,4m lx
5%	0,132 lx
10%	0,265 lx
30%	0,794 lx
50%	1,32 lx

Conditions:

Number of c-planes: 16

Lux at center: 2,65 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	22,6	23,8	22,8	24,1	24,4	23,2	24,4	23,4	24,8	25,0
	3H	24,0	25,3	24,4	25,6	25,8	24,8	26,1	25,2	26,4	26,6
	4H	24,6	25,9	25,0	26,1	26,4	25,6	26,8	26,0	27,1	27,3
	6H	25,1	26,2	25,4	26,5	26,9	26,2	27,3	26,5	27,6	28,0
	8H	25,3	26,3	25,6	26,6	27,1	26,4	27,5	26,8	27,8	28,2
	12H	25,3	26,4	25,7	26,7	27,2	26,6	27,7	27,0	28,0	28,4
4H	2H	23,2	24,5	23,6	24,8	25,0	23,7	24,9	24,1	25,2	25,5
	3H	25,0	26,0	25,3	26,3	26,8	25,6	26,7	26,0	27,0	27,5
	4H	25,6	26,6	26,1	27,0	27,6	26,4	27,4	26,9	27,8	28,4
	6H	26,2	27,1	26,7	27,5	27,8	27,2	28,1	27,7	28,4	28,8
	8H	26,4	27,2	26,9	27,6	28,0	27,4	28,3	27,9	28,7	29,0
	12H	26,5	27,2	27,0	27,7	28,1	27,7	28,4	28,2	28,8	29,3
8H	4H	26,0	26,8	26,5	27,2	27,6	26,7	27,5	27,2	27,9	28,3
	6H	26,7	27,3	27,2	27,8	28,4	27,6	28,2	28,1	28,7	29,2
	8H	27,0	27,6	27,5	28,1	28,7	27,9	28,5	28,5	29,0	29,7
	12H	27,2	27,7	27,8	28,2	28,8	28,3	28,8	28,9	29,3	29,9
12H	4H	26,0	26,7	26,5	27,1	27,6	26,7	27,4	27,2	27,8	28,3
	6H	26,8	27,4	27,3	27,9	28,5	27,6	28,2	28,1	28,7	29,4
	8H	27,1	27,6	27,7	28,1	28,7	28,0	28,5	28,6	29,0	29,6
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,1 / -0,2					0,1 / -0,1				
S = 2.0H		0,4 / -0,5					0,4 / -0,4				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 821 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	108	103	98	94	105	100	96	92	96	92	89	91	89	86	88	85	83	81
2	98	89	82	76	95	87	80	75	83	77	73	79	75	71	76	72	69	67
3	89	78	69	62	86	76	68	62	73	66	60	70	64	59	67	62	58	56
4	81	69	59	53	79	67	59	52	64	57	51	62	56	50	60	54	50	47
5	74	61	52	45	72	60	51	45	58	50	44	55	49	43	53	48	43	41
6	69	55	46	39	67	54	45	39	52	44	38	50	43	38	48	42	38	35
7	64	50	41	34	62	49	40	34	47	39	34	46	39	34	44	38	33	31
8	59	45	37	31	57	45	36	31	43	36	30	42	35	30	40	34	30	28
9	55	42	33	28	54	41	33	27	40	32	27	38	32	27	37	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	24	35	29	24	22

Luminaire budgetary diagram

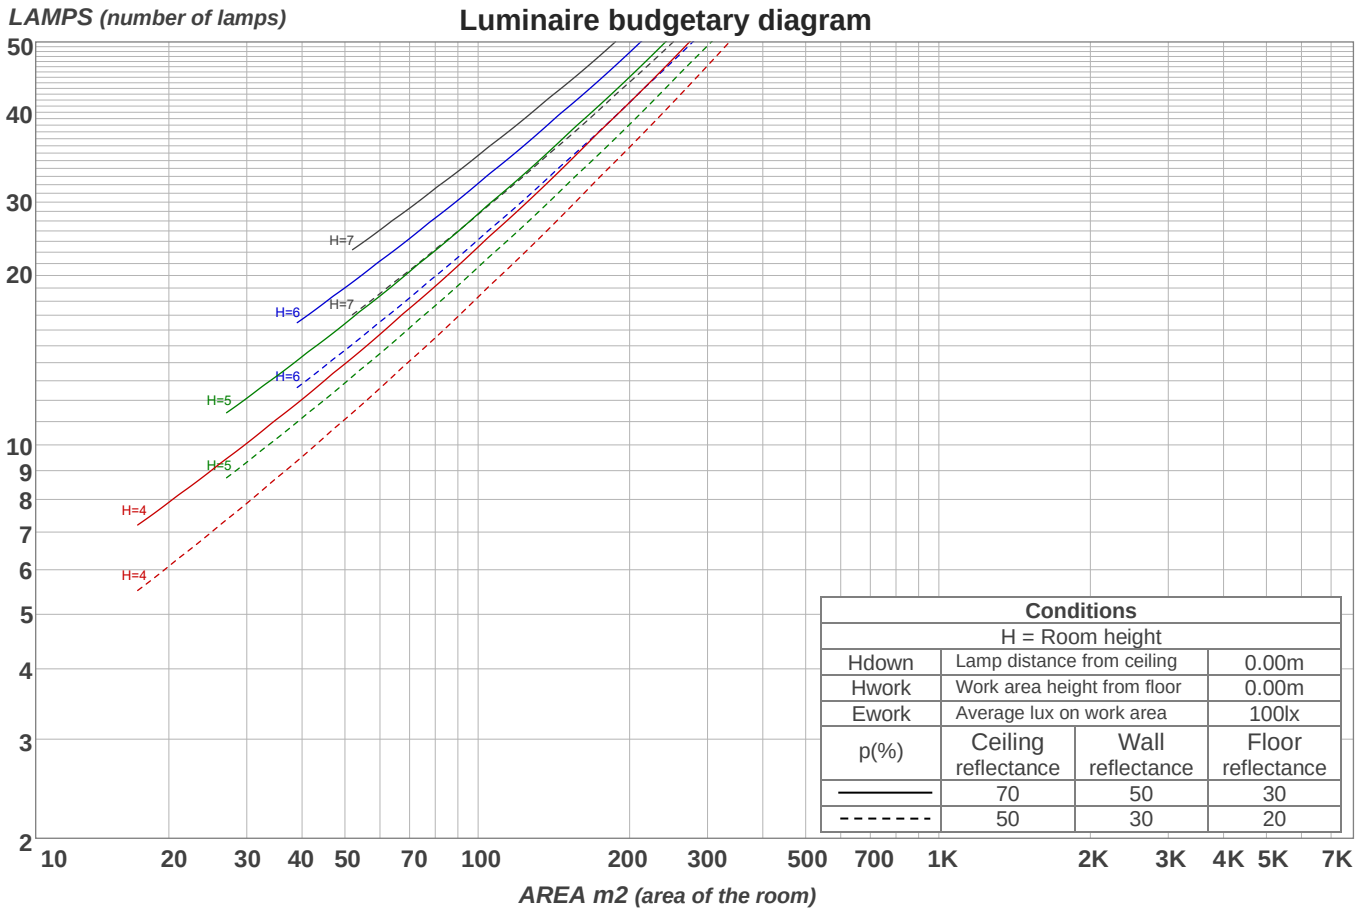


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
25,1 lm	72,0 lm	110 lm	134 lm	142 lm	132 lm	105 lm	66,3 lm	24,5 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
4,33 lm	1,38 lm	1,19 lm	1,08 lm	0,931 lm	0,755 lm	0,556 lm	0,341 lm	0,115 lm

Warmup curve

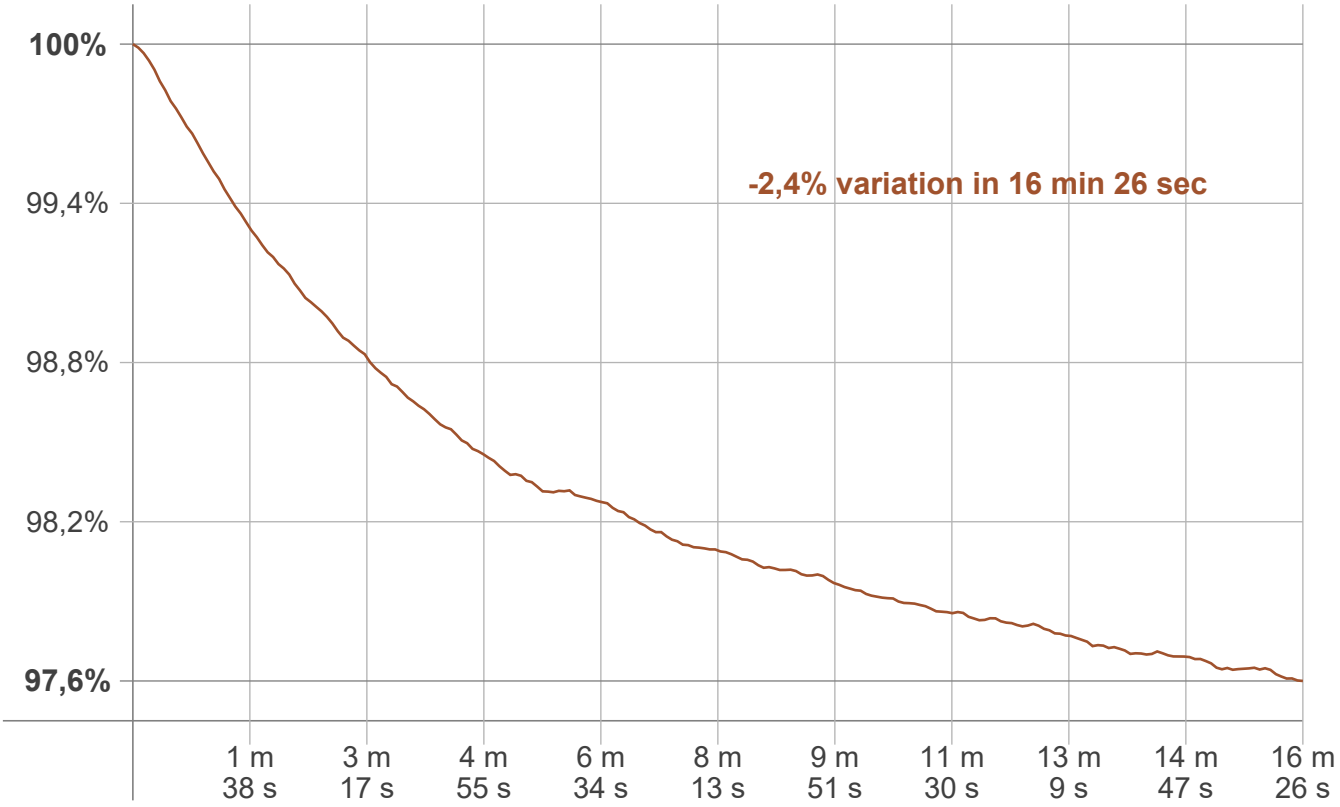

Warmup result

Warmup time:	**Lamp stabilized in 16 min 26 sec**
Warmup variation	**-2,4%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2693 K	**+7 K**	**2700 K**

Output change

Output start	Output change	Output end
842 lm	**-21 lm**	**821 lm**