Light efficiency:

147 Lumen/Watt

Light quality:


CRI: 82,0


Color temperature:

2700 K

Output: 1698 lm
Peak: 553 cd

Power: 11,5 W
PF: 1,0

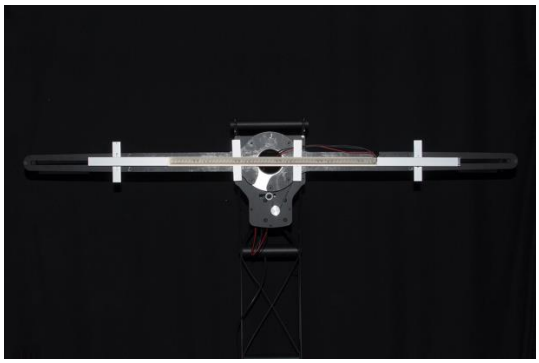

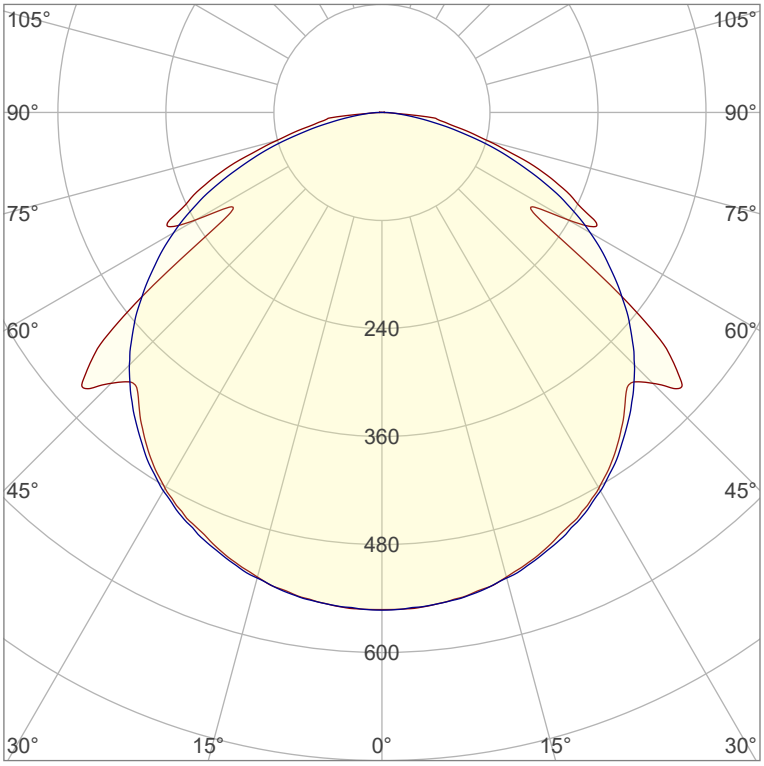

Product name:
Nova-6_510mm_827_Cover-Square-Transparent


Item number:
NP/L1C/06F/0510/827/CST

Date and time:
15.07.2022 08:51:04


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,460
y: 0,411


Spectra

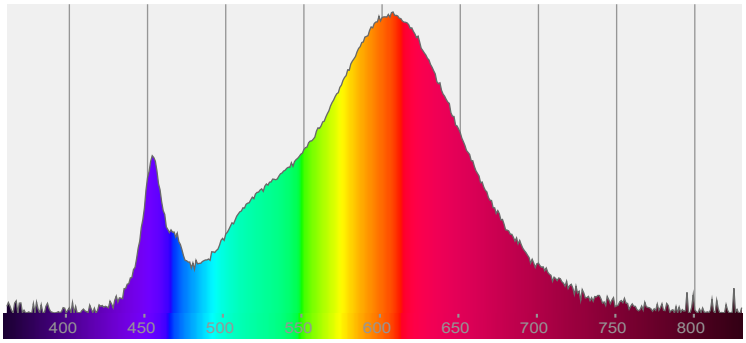


Power

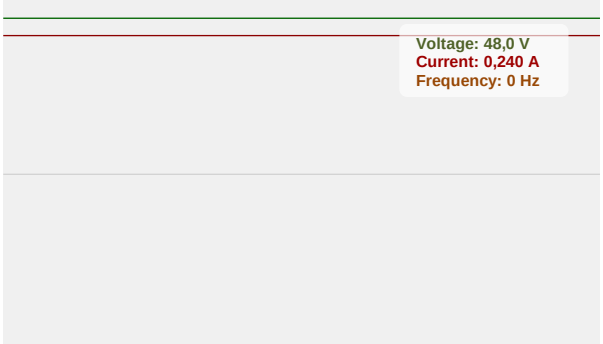

Color details

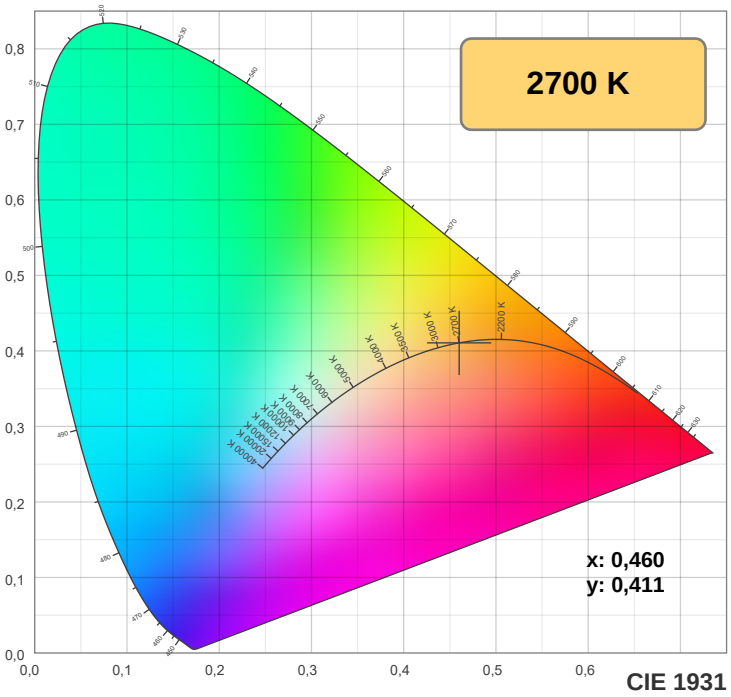


CIE 1931

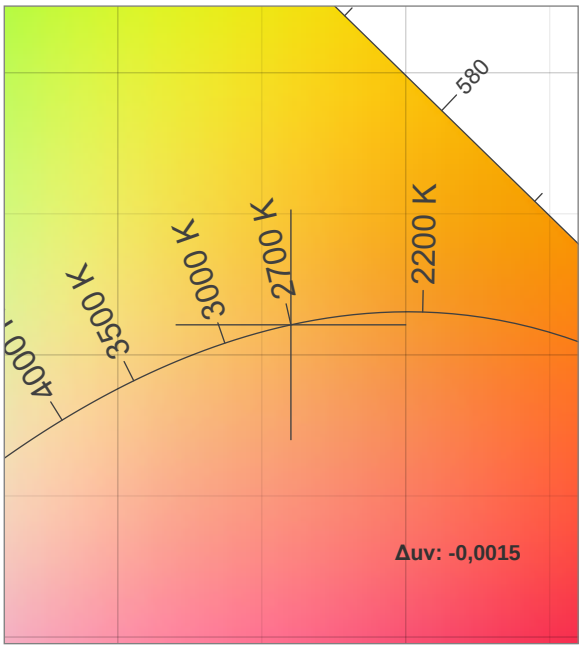


CIE 1931 ZOOM

TM30: 84,0

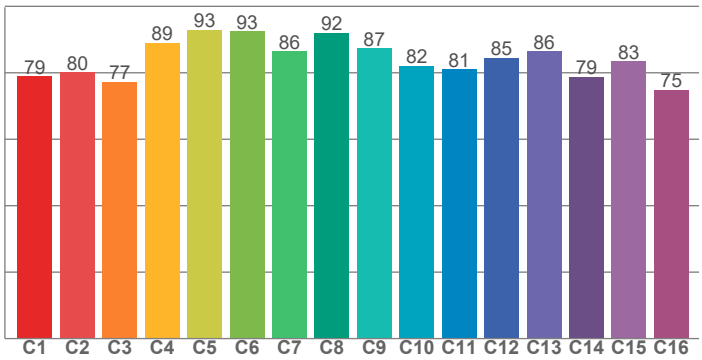

CRI: 82,0 (R1-R8)

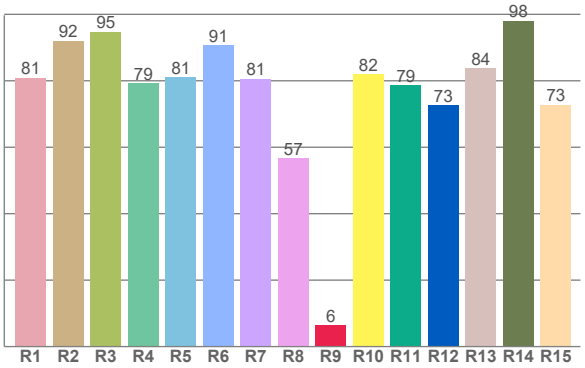

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80,9	92,1	94,8	79,2	81,0	90,8	80,6	56,7	6,3	82,0	78,6	72,6	83,7	98,0	72,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78,9	80,2	77,2	89,1	92,9	92,5	86,5	92,0	87,4	82,1	81,0	84,5	86,5	78,8	83,4	74,8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
76,8	93,8	82,1	78,1	81,5	82,5	81,6	83,6	94,2	89,2	85,0	81,7	80,8	71,0	72,7

CQS: 81,1

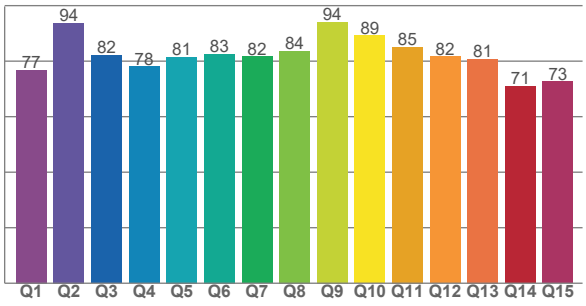

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	82,0	6,3	84,0	95,7	81,1	0,460	0,411	0,263	0,352	-0,0015

TM30 details


Rf 84,0


Fidelity index Rf


Rg 95,7


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	79	-12%	1%
2	80	-8%	8%
3	77	-3%	12%
4	89	0%	6%
5	93	2%	4%
6	93	2%	-3%
7	86	-5%	-6%
8	92	-4%	-1%
9	87	-6%	4%
10	82	-4%	11%
11	81	1%	14%
12	85	7%	2%
13	86	5%	-9%
14	79	5%	-17%
15	83	-4%	-10%
16	75	-9%	-17%

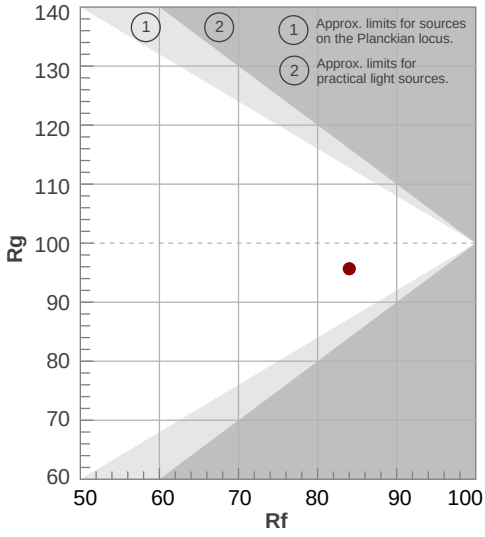


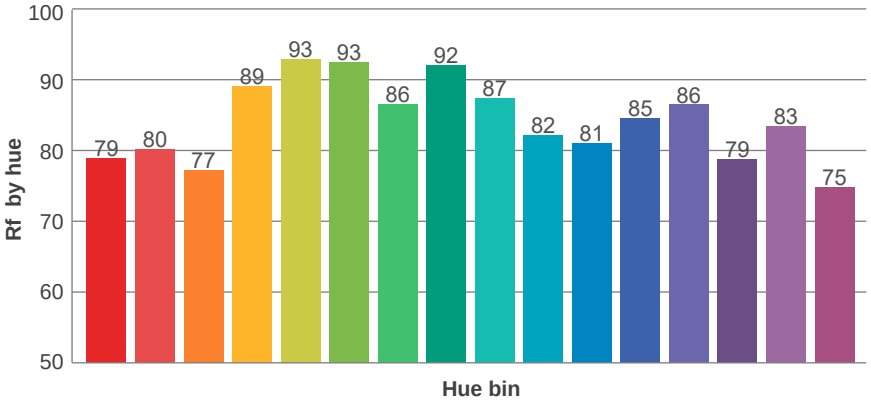

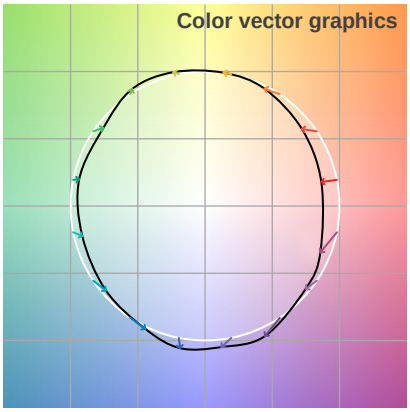


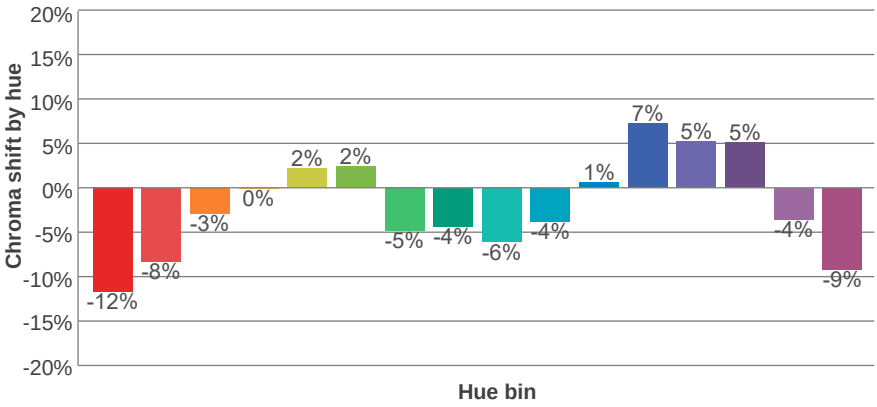

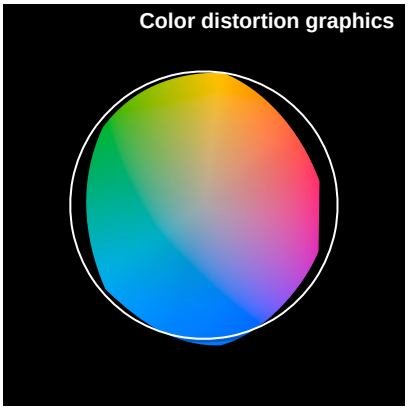

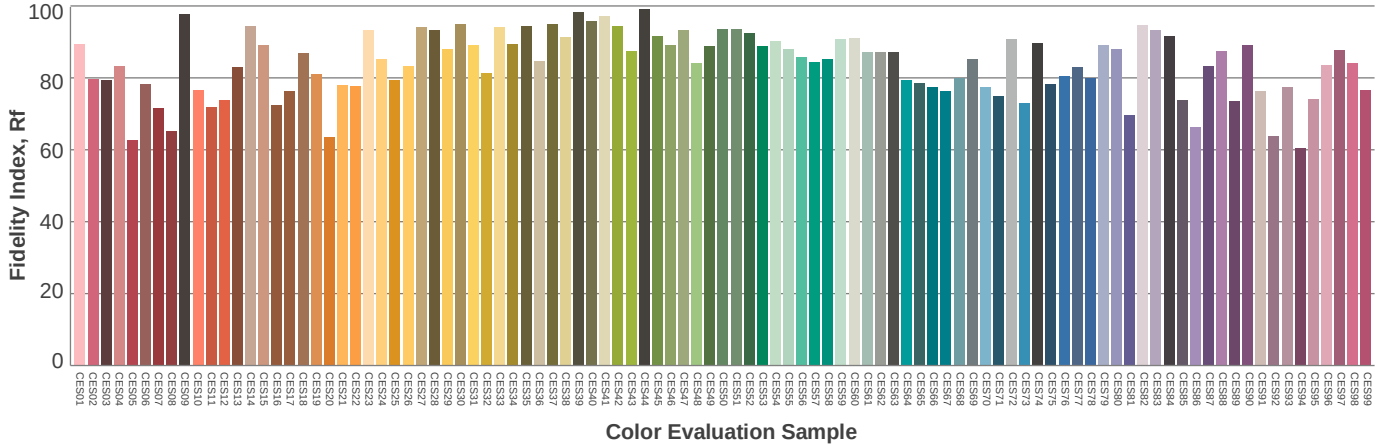

Beam details

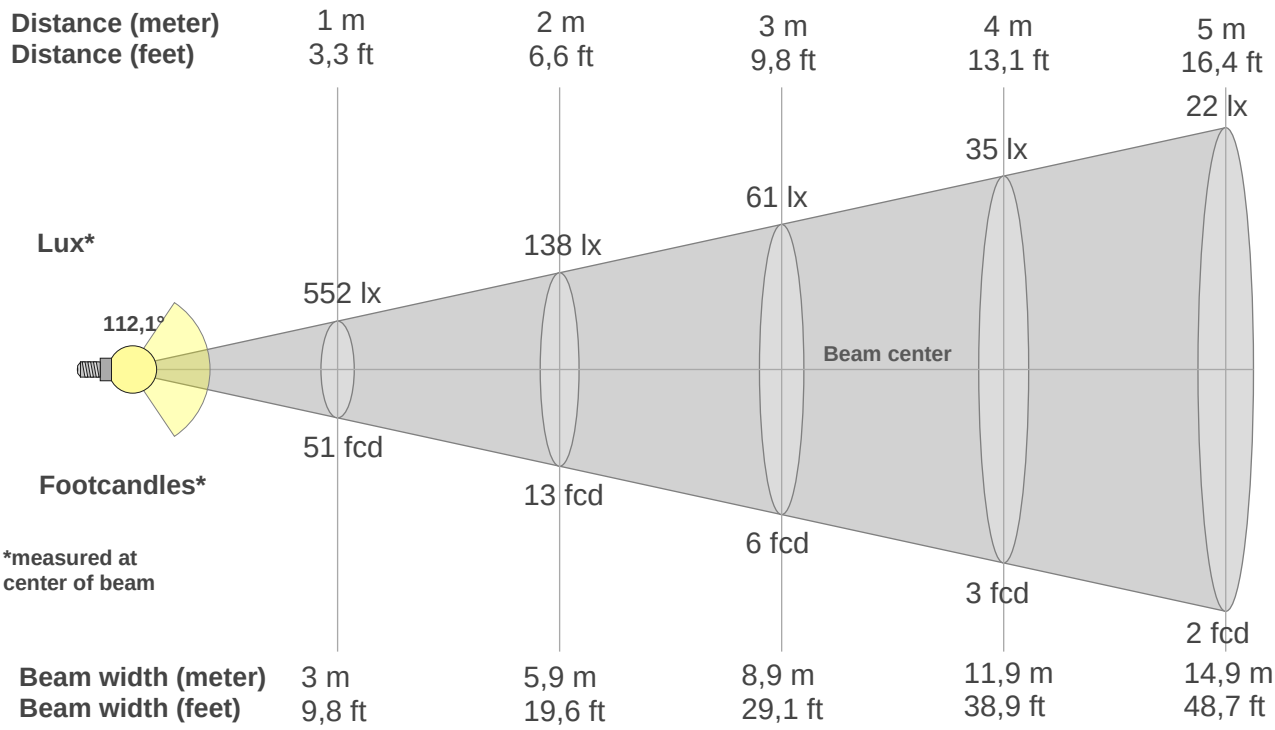

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
552lx	138lx	61lx	35lx	22lx	15lx	11lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	2lx	1lx
51,3fcd	12,8fcd	5,7fcd	3,2fcd	2,1fcd	1,4fcd	1fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
552	551	545	534	520	502	482	454	420	426	415	237	238	240	186	122	77	38	2	0
100%	100%	99%	97%	94%	91%	87%	82%	76%	77%	75%	43%	43%	43%	34%	22%	14%	7%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
552	551	545	535	522	506	485	460	430	397	358	314	267	215	157	99	51	19	3	3
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	65%	57%	48%	39%	28%	18%	9%	3%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
552	551	545	534	520	502	482	454	420	426	415	237	238	240	186	122	77	38	2	0
100%	100%	99%	97%	94%	91%	87%	82%	76%	77%	75%	43%	43%	43%	34%	22%	14%	7%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
552	551	545	535	522	506	485	460	430	397	358	314	267	215	157	99	51	19	3	3
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	65%	57%	48%	39%	28%	18%	9%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,1°	**166,5°**	**173,1°**	**76,7%**	**51,2%**

ISO candela diagram

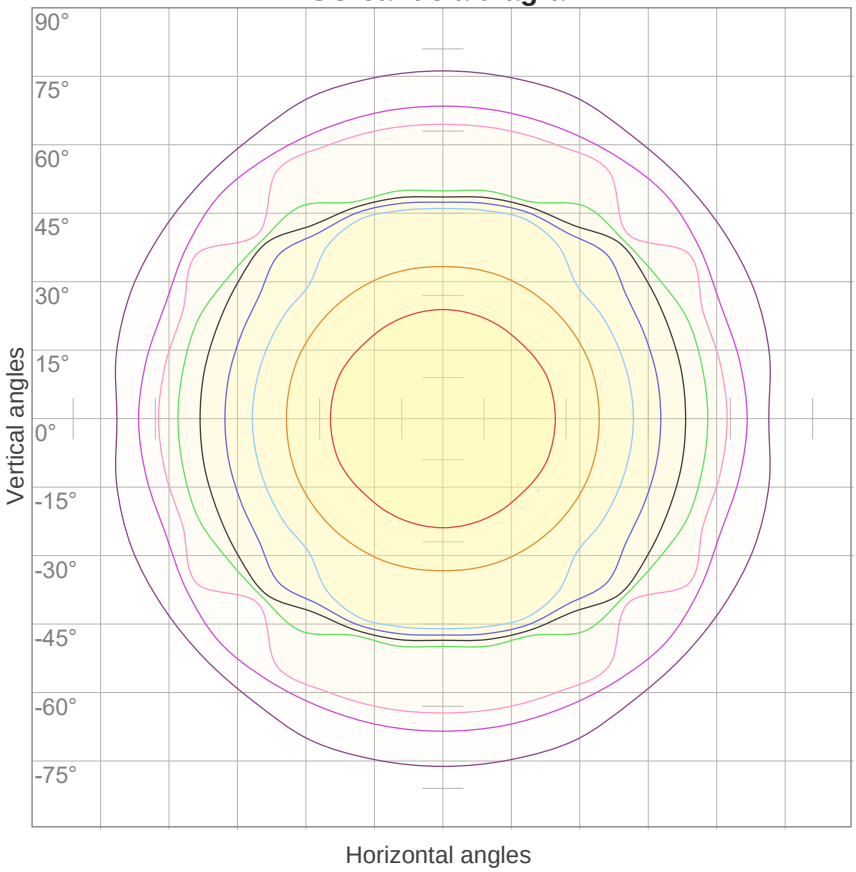


10%	55 cd
20%	110 cd
30%	166 cd
40%	221 cd
50%	276 cd
60%	331 cd
70%	387 cd
80%	442 cd
90%	497 cd

Conditions:

Number of c-planes: 16

Candela at center: 552 cd

ISO lux diagram

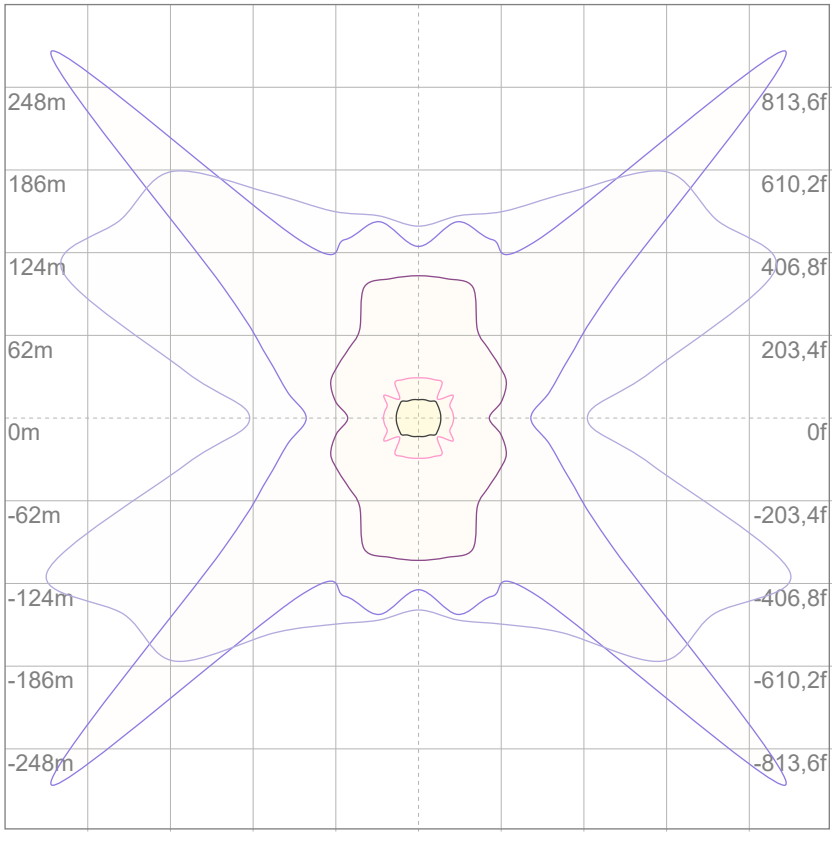

Mounting height: 10 meters (33 feet)

3%	0,166 lx
5%	0,276 lx
10%	0,552 lx
30%	1,66 lx
50%	2,76 lx

Conditions:

Number of c-planes: 16

Lux at center: 5,52 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	24,2	25,5	24,5	25,8	26,0	25,5	26,7	25,7	27,0	27,2
	3H	25,7	27,0	26,2	27,3	27,5	26,8	28,1	27,2	28,3	28,5
	4H	26,2	27,5	26,6	27,7	28,0	27,2	28,5	27,6	28,7	29,0
	6H	26,6	27,6	26,9	27,9	28,3	27,6	28,7	27,9	28,9	29,3
	8H	26,6	27,7	27,0	28,0	28,4	27,6	28,7	28,0	29,0	29,4
	12H	26,7	27,7	27,0	28,0	28,5	27,7	28,7	28,0	29,0	29,5
4H	2H	24,8	26,0	25,2	26,3	26,5	25,7	27,0	26,2	27,3	27,5
	3H	26,7	27,7	27,0	28,0	28,5	27,4	28,4	27,8	28,7	29,2
	4H	27,2	28,1	27,6	28,5	29,1	27,8	28,8	28,3	29,2	29,7
	6H	27,5	28,4	28,0	28,8	29,1	28,2	29,1	28,7	29,5	29,9
	8H	27,6	28,5	28,1	28,8	29,2	28,4	29,2	28,9	29,5	29,9
	12H	27,7	28,4	28,2	28,8	29,3	28,4	29,1	28,9	29,5	30,0
8H	4H	27,4	28,2	27,9	28,6	29,0	28,0	28,8	28,5	29,2	29,6
	6H	27,9	28,5	28,4	29,0	29,5	28,6	29,2	29,1	29,7	30,2
	8H	28,1	28,7	28,6	29,2	29,8	28,8	29,3	29,3	29,8	30,5
	12H	28,3	28,7	28,8	29,2	29,8	28,9	29,3	29,4	29,8	30,4
12H	4H	27,4	28,1	27,9	28,5	29,0	28,0	28,7	28,5	29,1	29,6
	6H	28,0	28,5	28,5	29,0	29,7	28,6	29,2	29,1	29,7	30,3
	8H	28,2	28,6	28,8	29,1	29,7	28,8	29,3	29,4	29,8	30,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,3 / -0,3					0,1 / -0,1				
S = 1.5H		0,6 / -0,9					0,3 / -0,4				
S = 2.0H		1,0 / -0,7					0,8 / -0,9				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1698 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	108	103	99	95	105	101	97	93	96	93	90	92	90	87	89	86	84	82
2	98	90	82	77	95	88	81	76	84	78	74	80	76	72	77	73	70	68
3	89	78	70	63	87	77	69	63	73	67	61	71	65	60	68	63	59	57
4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48
5	75	62	52	46	73	60	52	45	58	51	45	56	49	44	54	48	44	41
6	69	55	46	40	67	54	46	39	52	45	39	51	44	39	49	43	38	36
7	64	50	41	35	62	49	41	35	47	40	34	46	39	34	45	38	34	32
8	59	46	37	31	58	45	37	31	43	36	31	42	35	30	41	35	30	28
9	55	42	33	28	54	41	33	28	40	33	27	39	32	27	38	31	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23

Luminaire budgetary diagram

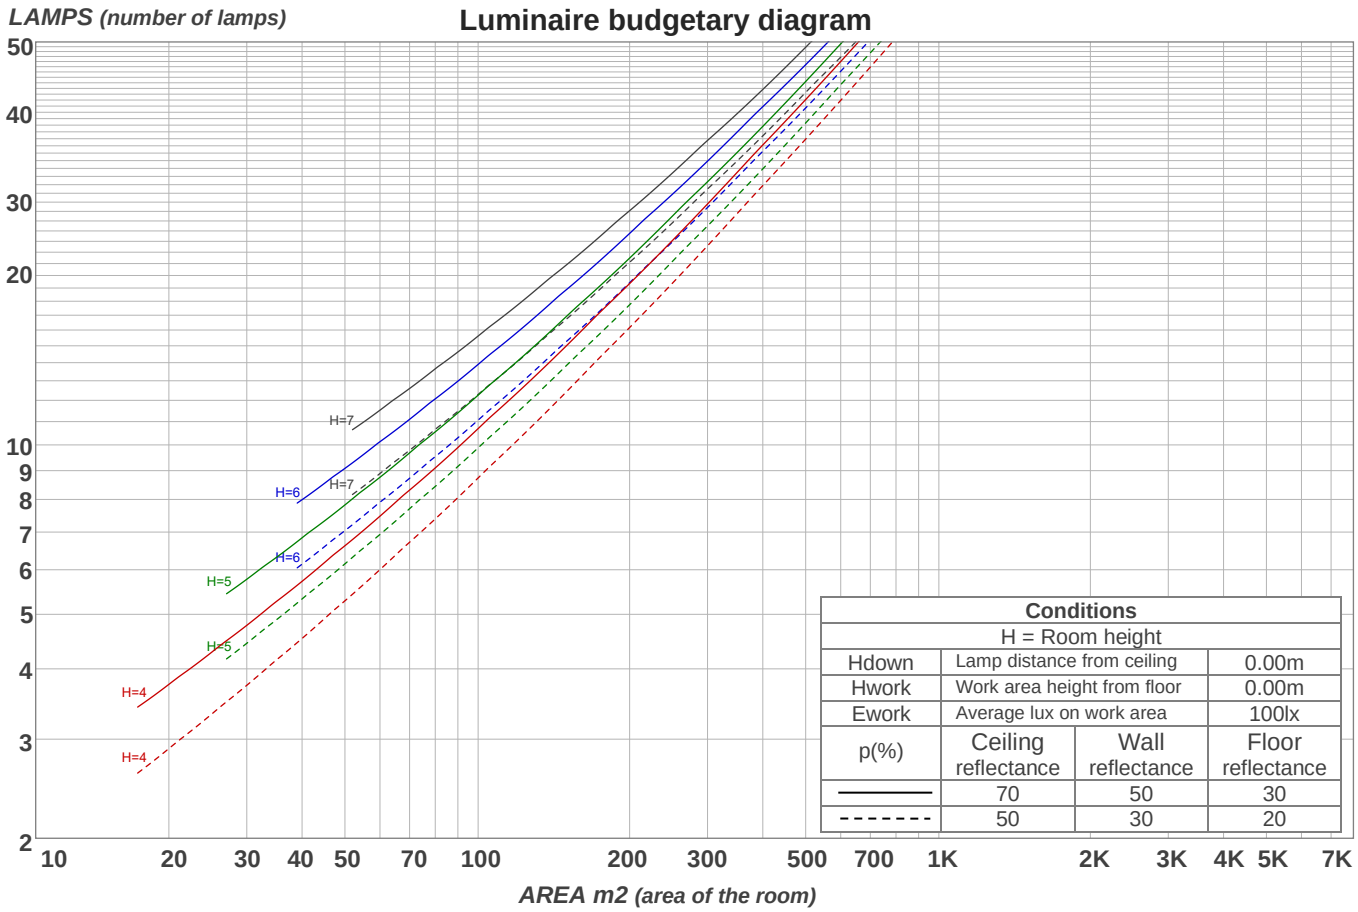


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
49,0 lm	148 lm	233 lm	284 lm	312 lm	277 lm	213 lm	128 lm	39,8 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2,95 lm	3,20 lm	1,08 lm	0,972 lm	0,695 lm	0,470 lm	0,346 lm	0,212 lm	4,93 lm

Warmup curve

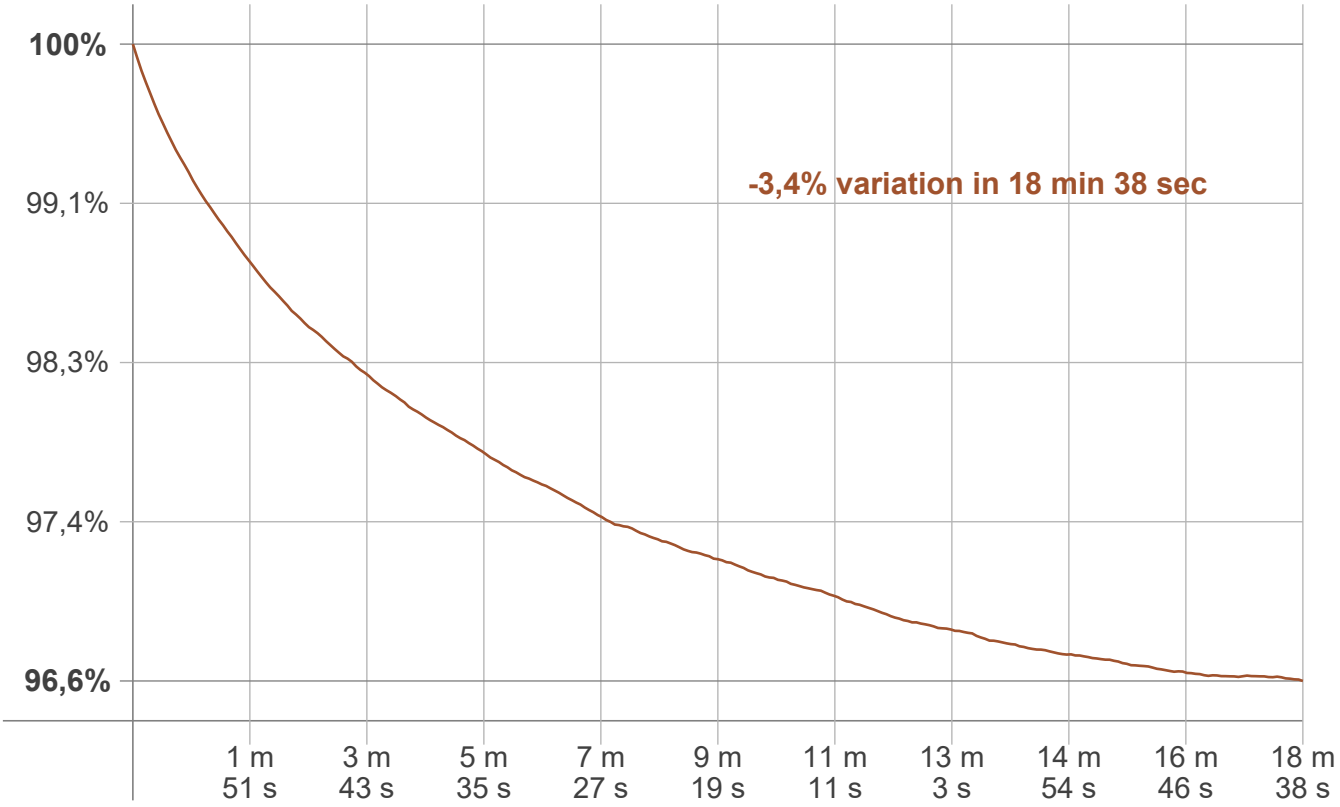

Warmup result

Warmup time:	**Lamp stabilized in 18 min 38 sec**
Warmup variation	**-3,4%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2694 K	+6 K	2700 K

Output change

Output start	Output change	Output end
1764 lm	-66 lm	1698 lm