Light efficiency:

114 Lumen/Watt

Light quality:


CRI: 93,0


Color temperature:

6500 K

Output: 1091 lm
Peak: 801 cd

Power: 9,6 W
PF: 1,0

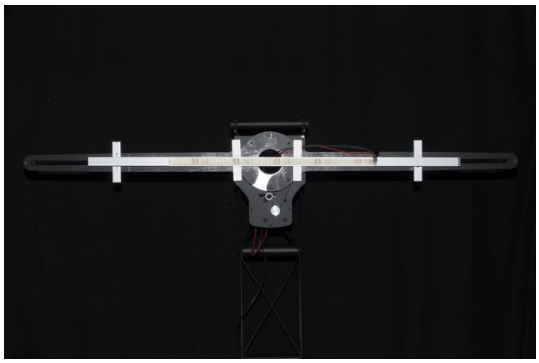

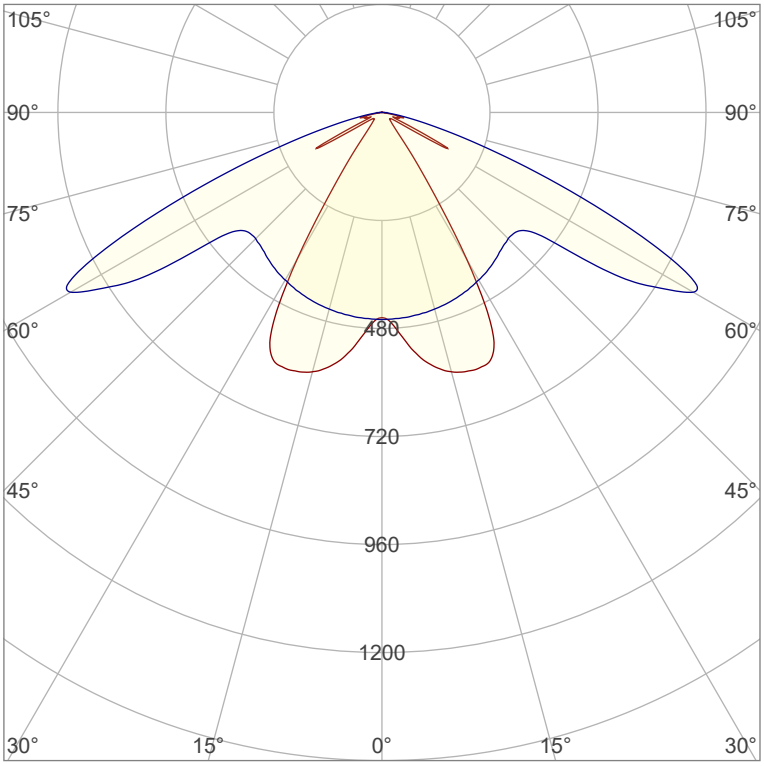

Product name:
Pegasus-5_510mm_965_Lens-60°-Transparent


Item number:
NP/L2C/09E/0510/965/L6T

Date and time:
11.04.2025 09:57:24


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 13.10.2023
Tester:
Peter Ulrich
Test Site:
Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,314
y: 0,324


Spectra

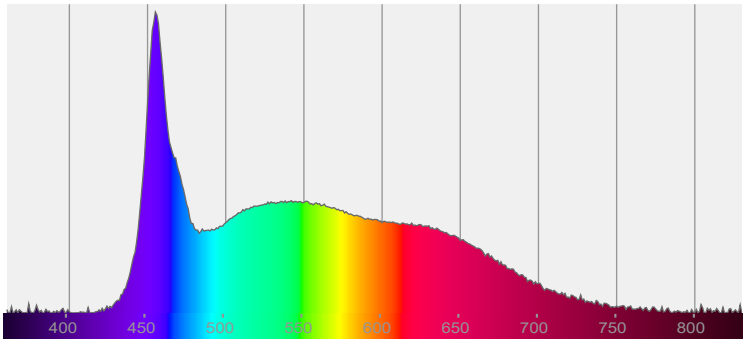


Power

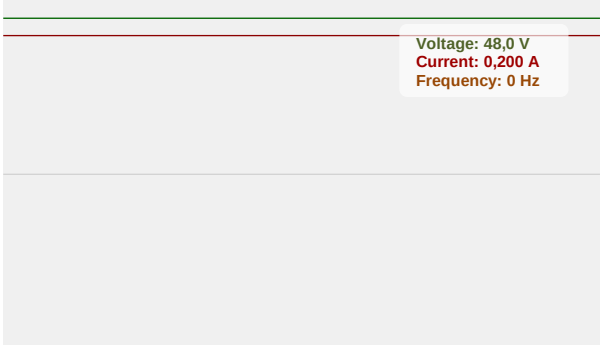

Color details

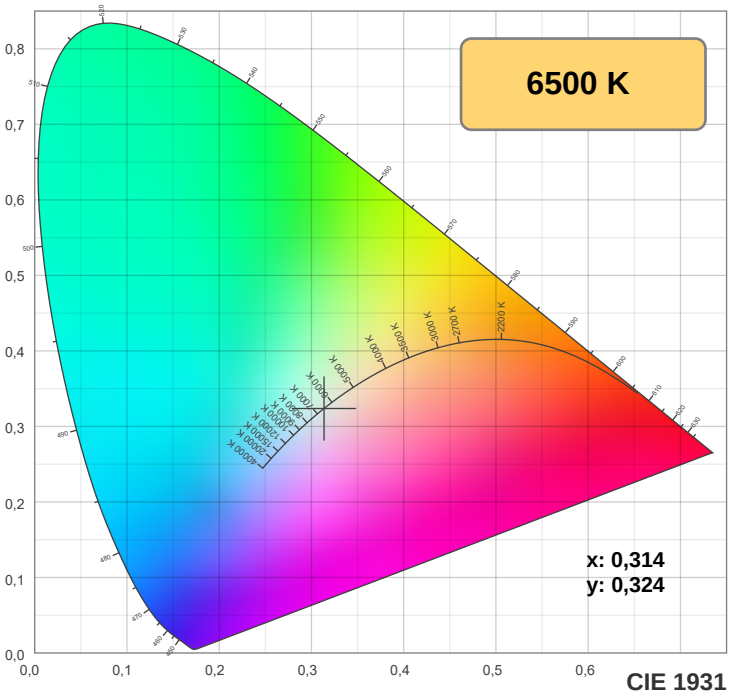


CIE 1931

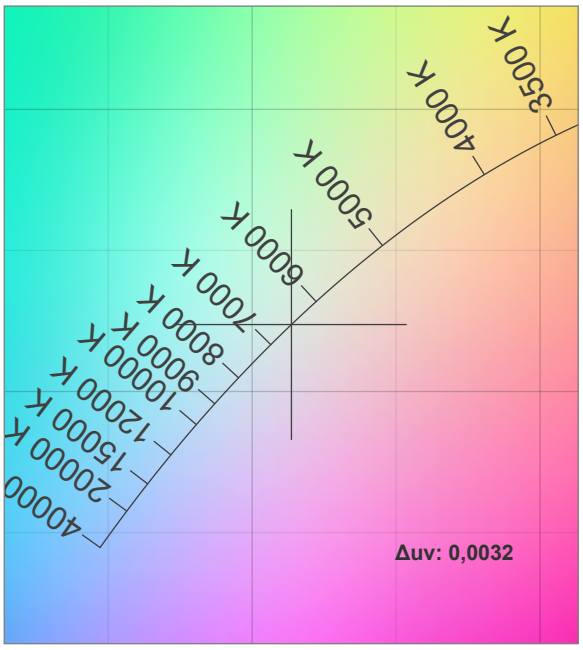


CIE 1931 ZOOM

TM30: 87,1

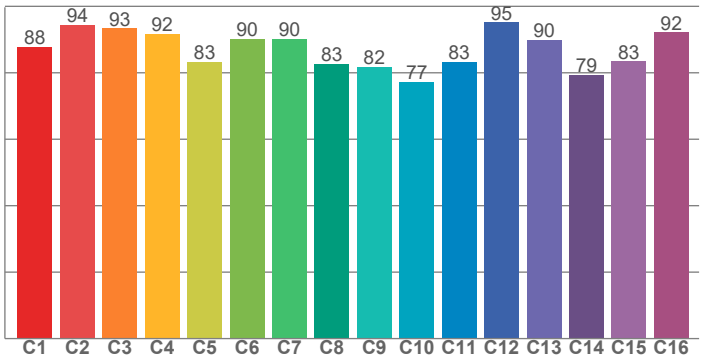

CRI: 93,0 (R1-R8)

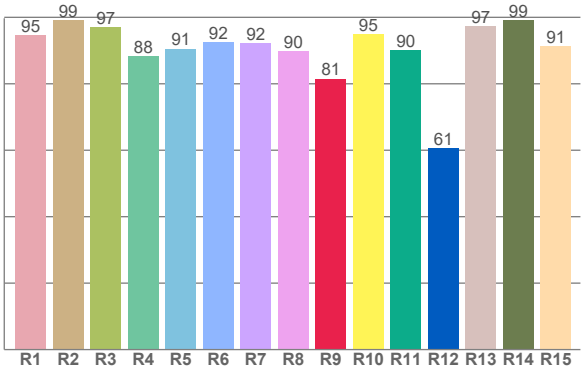

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,6	99,1	97,0	88,2	90,6	92,5	92,2	89,8	81,5	95,0	90,0	60,5	97,4	99,1	91,3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
87,8	94,3	93,3	91,7	83,3	90,1	90,2	82,7	81,8	77,2	83,3	95,1	89,9	79,3	83,4	92,2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
86,2	95,8	86,7	79,4	82,3	84,6	92,2	95,1	98,8	97,2	94,5	94,8	95,3	93,9	92,0

CQS: 89,6

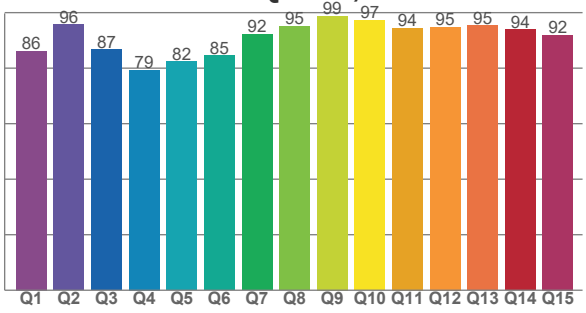

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
6500 K	93,0	81,5	87,1	95,6	89,6	0,314	0,324	0,200	0,310	0,0032

TM30 details


Rf 87,1


Fidelity index Rf


Rg 95,6


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	88	-4%	2%
2	94	-1%	2%
3	93	-2%	-1%
4	92	-3%	-1%
5	83	-10%	-3%
6	90	-7%	-1%
7	90	-7%	1%
8	83	-7%	8%
9	82	-4%	16%
10	77	1%	16%
11	83	5%	8%
12	95	3%	-1%
13	90	4%	-5%
14	79	11%	-9%
15	83	3%	-10%
16	92	-4%	1%

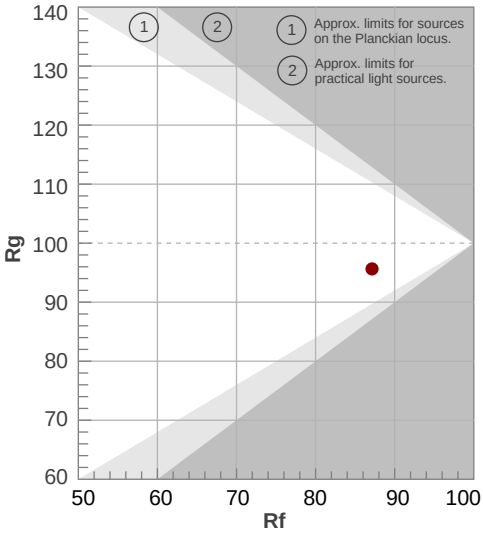


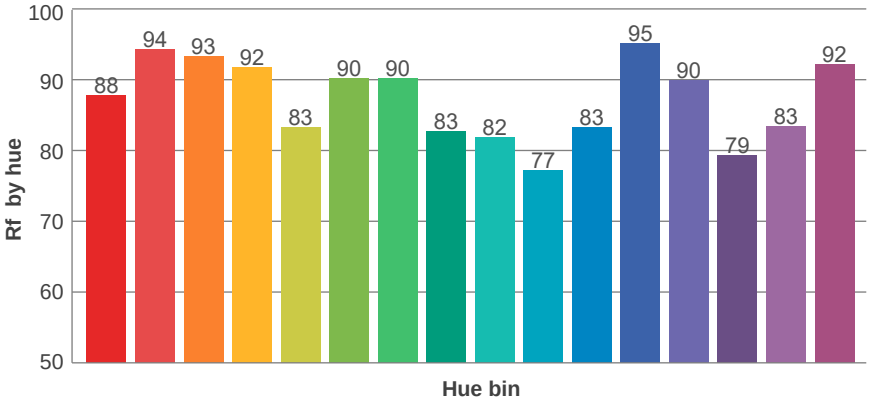

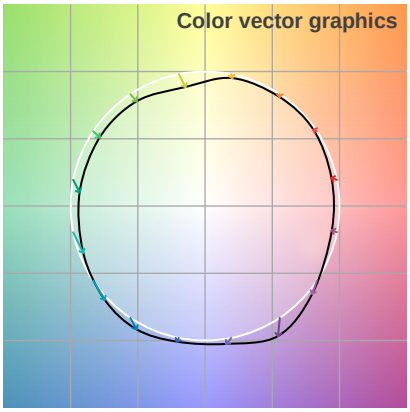


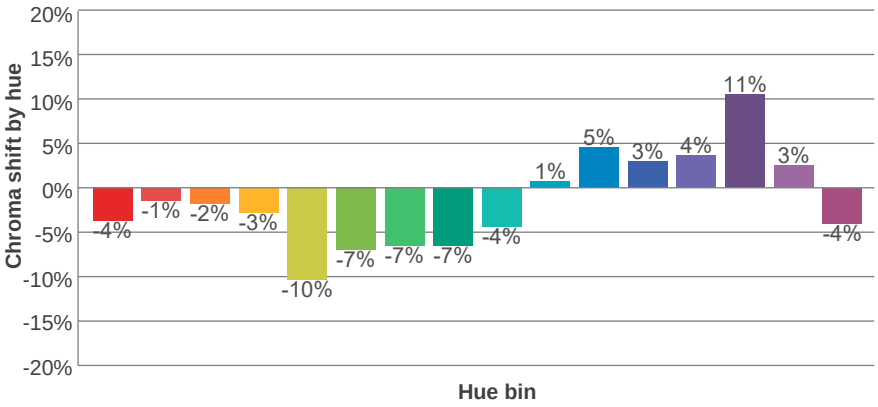

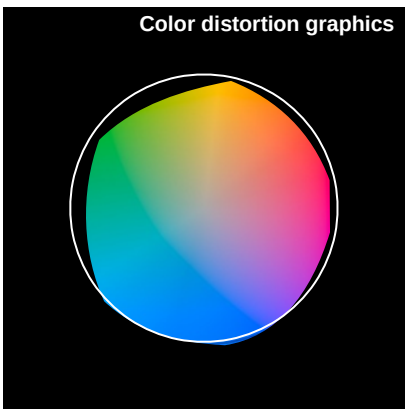

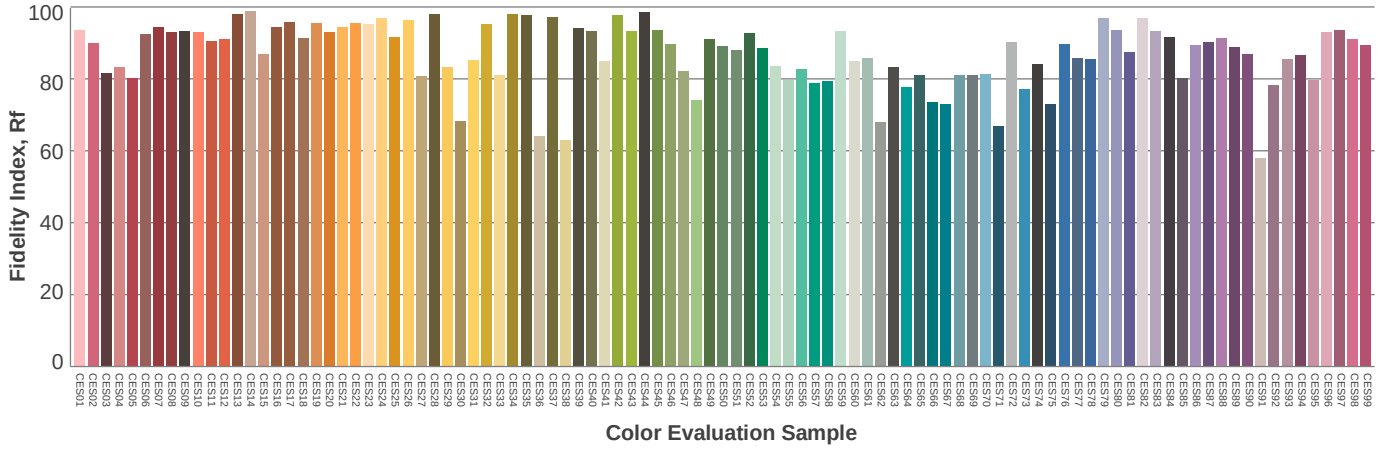

Beam details

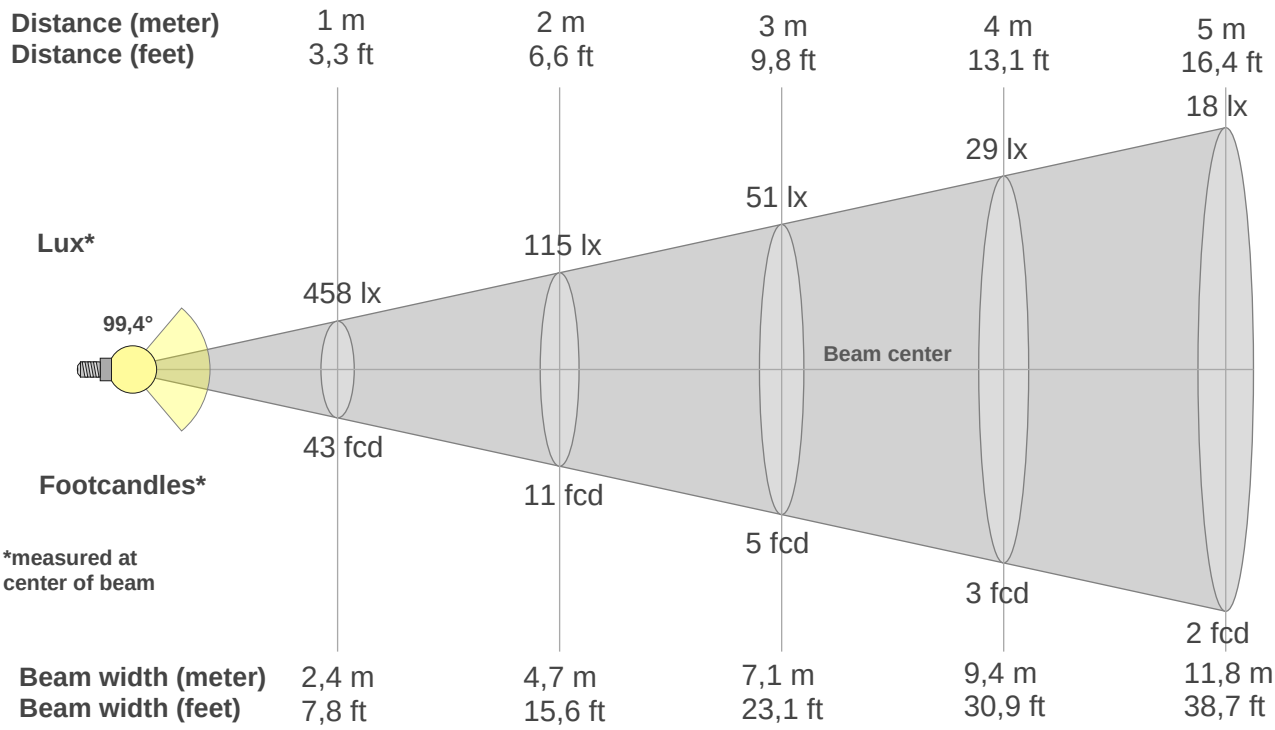

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
458lx	115lx	51lx	29lx	18lx	13lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx
42,6fcd	10,6fcd	4,7fcd	2,7fcd	1,7fcd	1,2fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
458	498	562	596	608	586	378	123	43	27	23	24	111	43	35	44	14	6	2	0
100%	109%	123%	130%	133%	128%	82%	27%	9%	6%	5%	5%	24%	9%	8%	10%	3%	1%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
458	459	456	452	447	439	430	419	406	397	409	621	797	606	306	122	41	11	1	1
100%	100%	100%	99%	97%	96%	94%	92%	89%	87%	89%	135%	174%	132%	67%	27%	9%	2%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
458	498	562	596	608	586	378	123	43	27	23	24	111	43	35	44	14	6	2	0
100%	109%	123%	130%	133%	128%	82%	27%	9%	6%	5%	5%	24%	9%	8%	10%	3%	1%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
458	459	456	452	447	439	430	419	406	397	409	621	797	606	306	122	41	11	1	1
100%	100%	100%	99%	97%	96%	94%	92%	89%	87%	89%	135%	174%	132%	67%	27%	9%	2%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
99,4°	**141,2°**	**162,6°**	**84,2%**	**72,5%**

ISO candela diagram

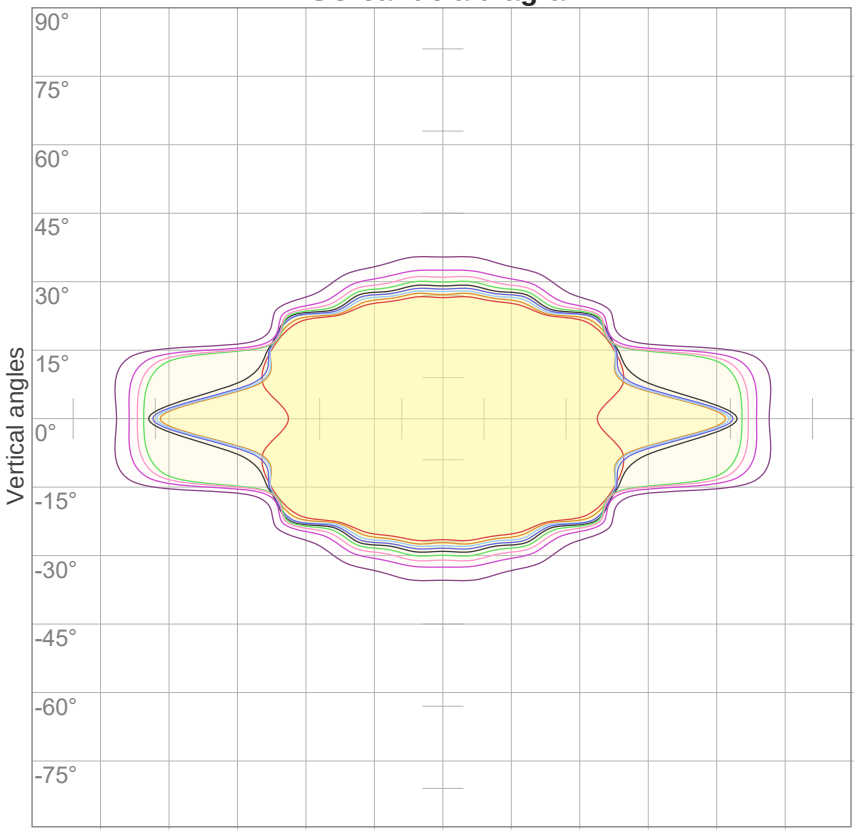


10%	46 cd
20%	92 cd
30%	138 cd
40%	183 cd
50%	229 cd
60%	275 cd
70%	321 cd
80%	367 cd
90%	413 cd

Conditions:

Number of c-planes: 16

Candela at center: 458 cd

ISO lux diagram

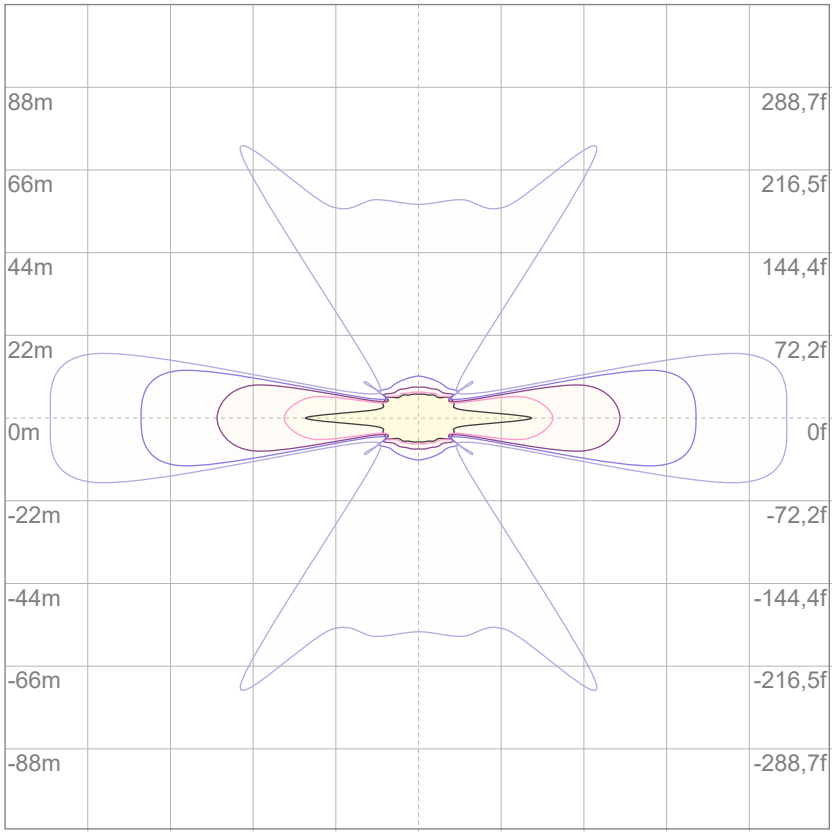

Mounting height: 10 meters (33 feet)

3%	0,138 lx
5%	0,229 lx
10%	0,458 lx
30%	1,38 lx
50%	2,29 lx

Conditions:

Number of c-planes: 16

Lux at center: 4,58 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	16,9	17,9	17,1	18,2	18,4	28,3	29,3	28,5	29,6	29,8
	3H	17,5	18,6	17,9	18,9	19,1	30,2	31,3	30,6	31,5	31,7
	4H	18,2	19,2	18,6	19,5	19,7	30,4	31,5	30,8	31,7	32,0
	6H	18,8	19,7	19,1	20,0	20,4	30,6	31,5	30,9	31,8	32,1
	8H	18,8	19,7	19,2	20,0	20,4	30,5	31,4	30,9	31,7	32,1
	12H	18,8	19,6	19,2	20,0	20,4	30,5	31,3	30,9	31,7	32,1
4H	2H	17,1	18,1	17,5	18,4	18,7	27,9	29,0	28,3	29,2	29,5
	3H	18,2	19,0	18,5	19,3	19,8	30,0	30,8	30,4	31,2	31,6
	4H	18,9	19,7	19,4	20,1	20,6	30,2	31,0	30,6	31,4	31,9
	6H	19,7	20,5	20,2	20,8	21,2	30,3	31,1	30,8	31,4	31,8
	8H	19,7	20,4	20,2	20,8	21,1	30,3	31,0	30,8	31,3	31,7
	12H	19,7	20,3	20,2	20,7	21,2	30,3	30,8	30,8	31,2	31,7
8H	4H	19,1	19,8	19,6	20,2	20,5	30,1	30,8	30,6	31,2	31,5
	6H	20,0	20,6	20,5	21,0	21,6	30,2	30,7	30,7	31,2	31,7
	8H	20,1	20,6	20,6	21,1	21,7	30,2	30,7	30,8	31,2	31,8
	12H	20,1	20,5	20,7	21,0	21,6	30,2	30,6	30,8	31,1	31,7
12H	4H	19,1	19,7	19,6	20,1	20,6	30,0	30,6	30,5	31,0	31,5
	6H	20,1	20,6	20,7	21,1	21,7	30,2	30,6	30,7	31,2	31,8
	8H	20,2	20,6	20,8	21,1	21,7	30,2	30,6	30,8	31,1	31,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		1,4 / -1,4					1,8 / -2,5				
S = 1.5H		2,3 / -1,5					3,6 / -6,1				
S = 2.0H		3,6 / -2,3					5,3 / -8,6				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1091 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	110	106	103	99	108	104	101	98	100	97	94	96	93	91	92	90	89	87
2	102	95	89	84	99	93	87	83	89	85	81	86	82	79	83	80	77	75
3	94	85	78	72	92	83	77	72	80	75	70	78	73	69	75	71	68	66
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	68	64	60	58
5	81	70	62	56	79	69	61	56	66	60	55	65	59	54	63	58	54	52
6	76	64	56	50	74	63	55	50	61	54	49	59	53	49	58	52	48	46
7	71	58	51	45	69	58	50	45	56	49	45	55	49	44	53	48	44	42
8	66	54	46	41	65	53	46	41	52	45	40	51	45	40	50	44	40	38
9	62	50	42	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35
10	59	46	39	34	57	46	39	34	45	38	34	44	38	34	43	38	34	32

Luminaire budgetary diagram

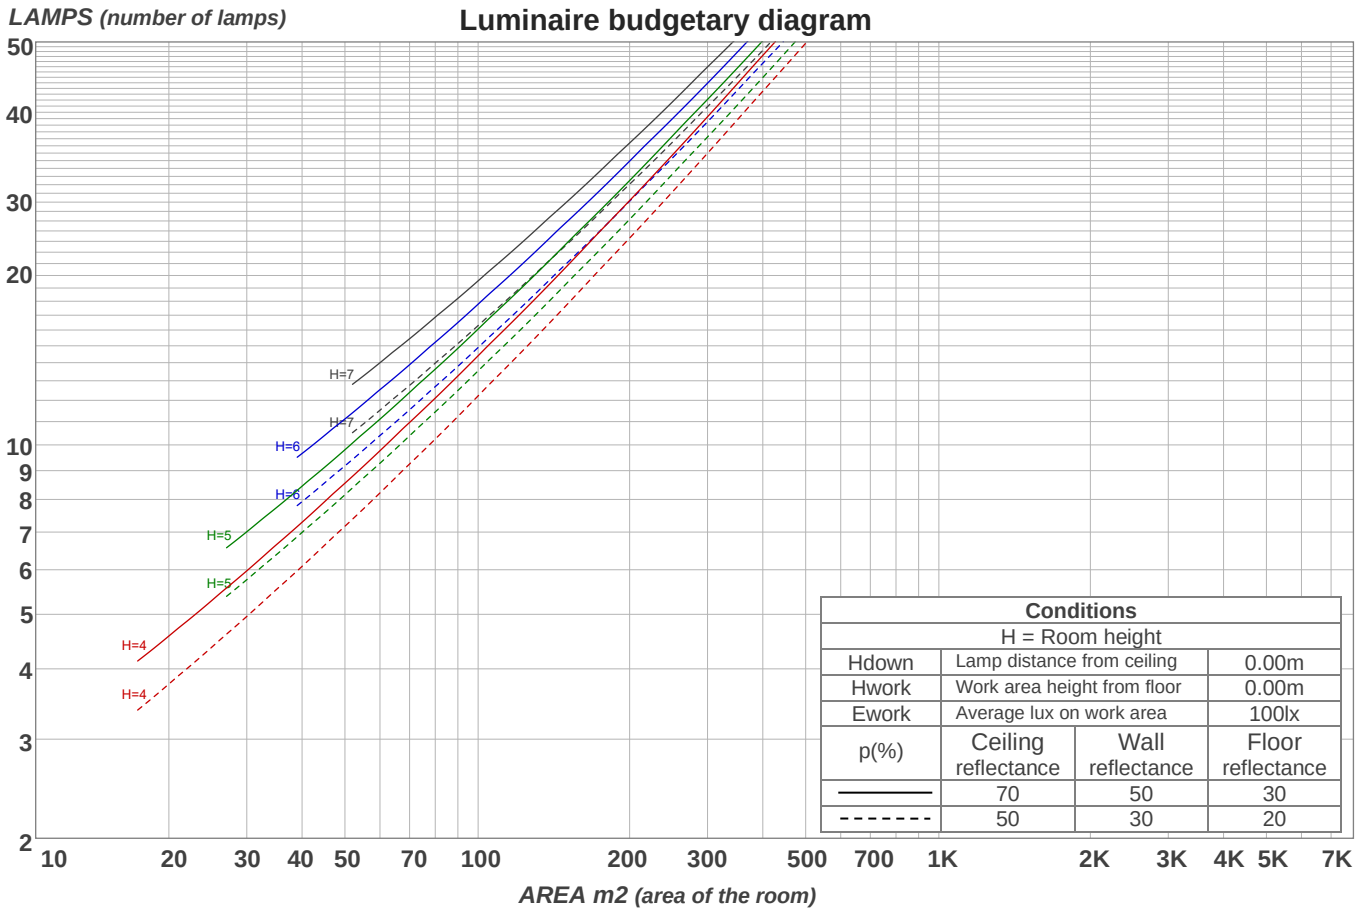


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
43,0 lm	147 lm	260 lm	247 lm	136 lm	85,4 lm	111 lm	42,3 lm	11,5 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,44 lm	1,62 lm	0,177 lm	0,160 lm	0,065 lm	0,000 lm	0,000 lm	0,000 lm	4,37 lm

Warmup curve

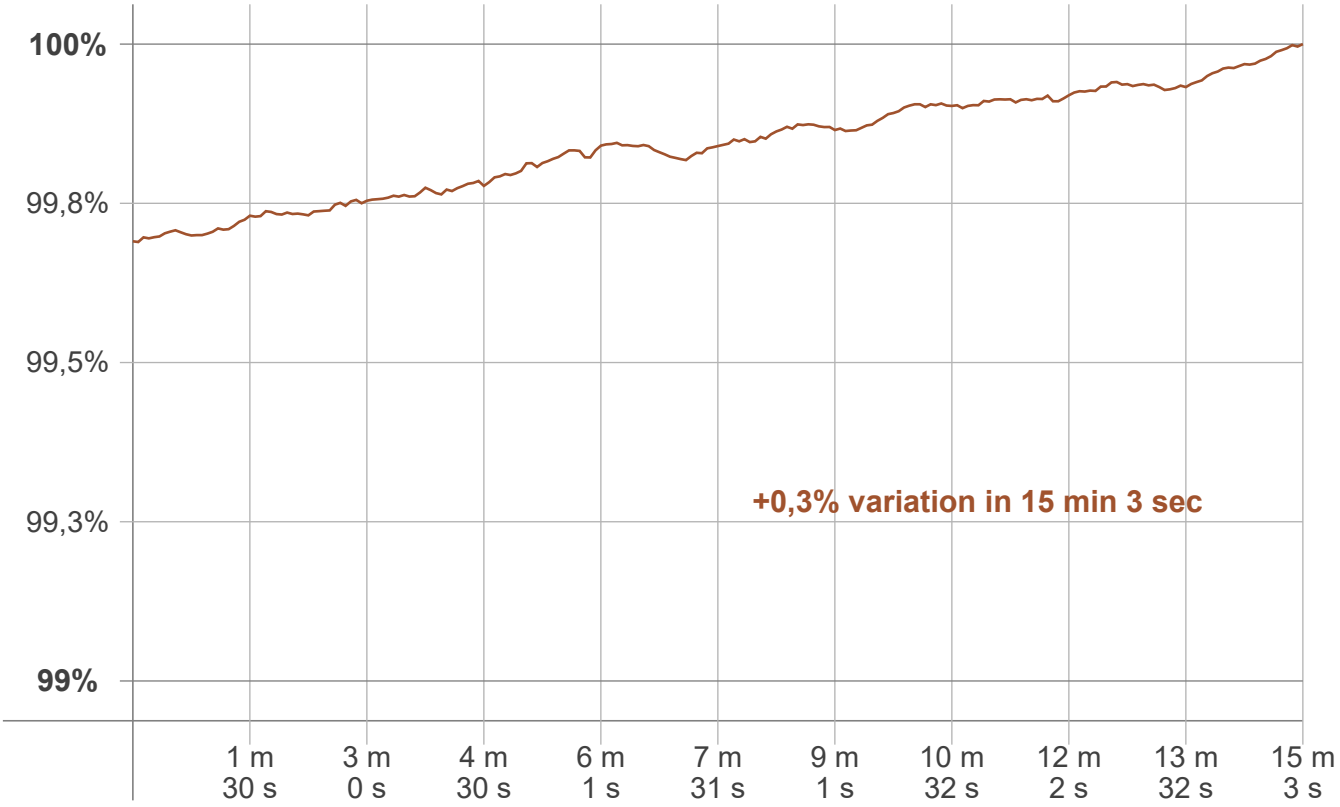

Warmup result

Warmup time:	**Lamp stabilized in 15 min 3 sec**
Warmup variation	**+0,3%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
6505 K	-5 K	6500 K

Output change

Output start	Output change	Output end
1088 lm	+3 lm	1091 lm