

Light efficiency:

117 Lumen/Watt

Light quality:

CRI: 0,0

Color temperature:


0 K

Output: 902 lm

Peak: 834 cd

Power: 7,7 W

PF: 1,0

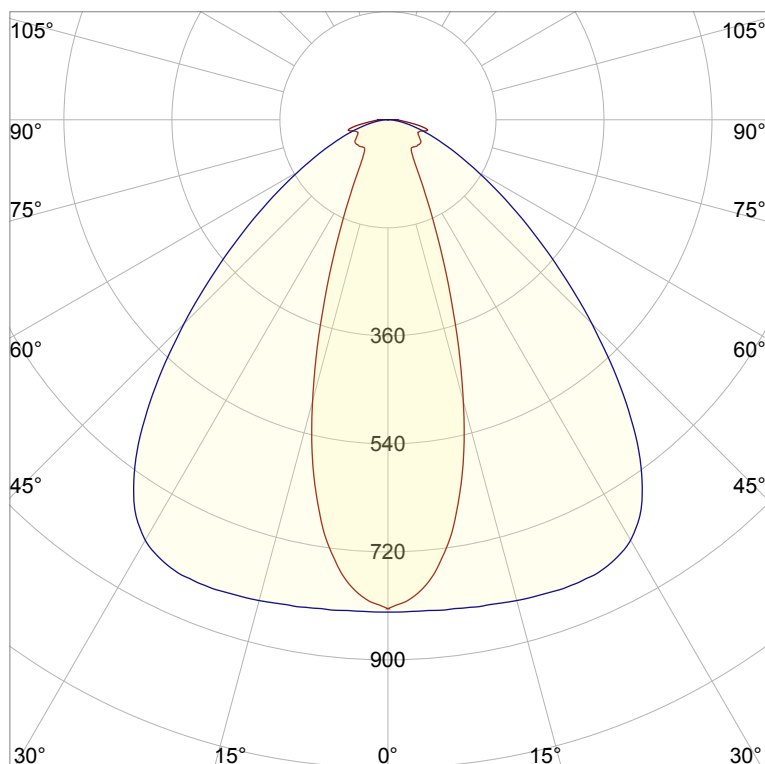

Product name:

Defiant-0508-XXG-L3F

Item number:

FLNP/L22A0508/XXG/L3F

Date and time:

08.07.2020 11:29:58

Description:

Rank: R2G2B4/RC2GA2BA5/A

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 K

CRI +/-0,7

Angular Resolution 1 Grad Step

Last Calibration 20.05.2020

Pruefer:

Peter Ulrich

Pruefort:

Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein




CIE 1931


x: 0,200



y: 0,728

Spectra

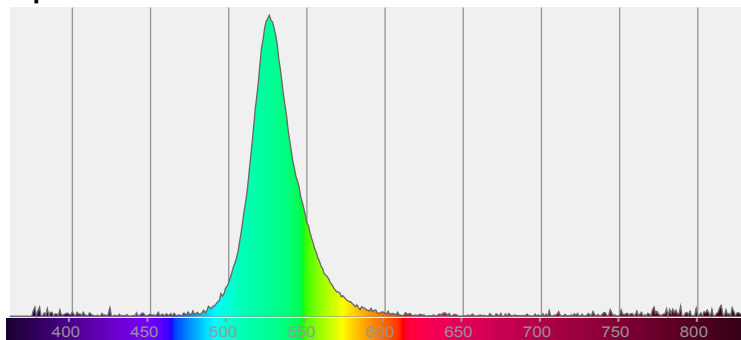

Power

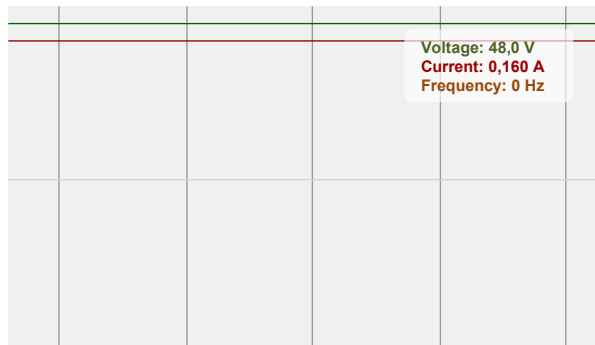

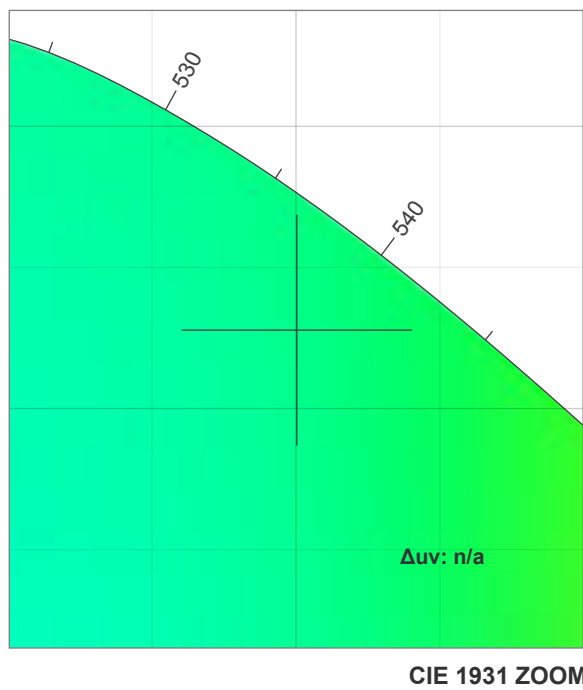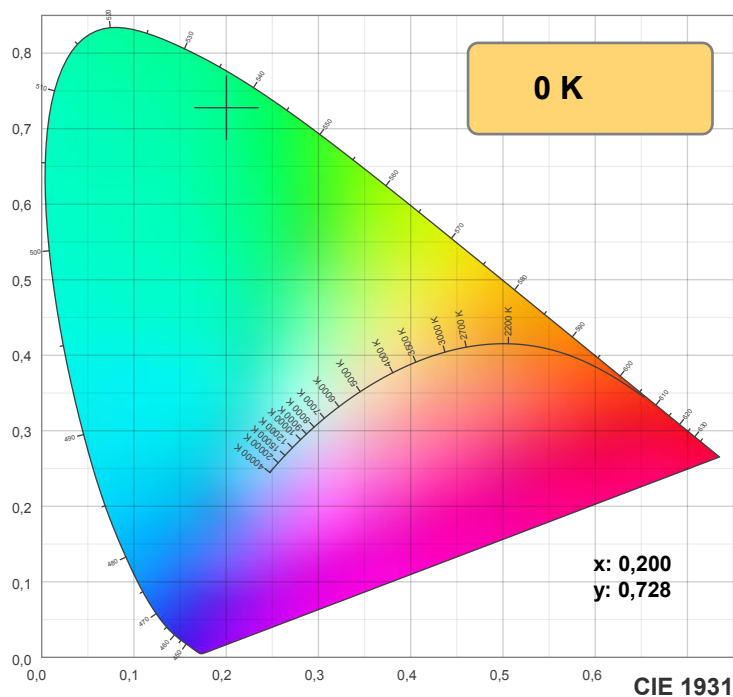

TM30: 0,0

CRI: 0,0 (R1-R8)

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS: 0,0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15	

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0,0	0,0	0,0	0,0	0,0	0,200	0,728	0,071	0,385	n/a




Rf 0,0


Fidelity index Rf

Rg 0,0

Gammut index Rg

		Graphic shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

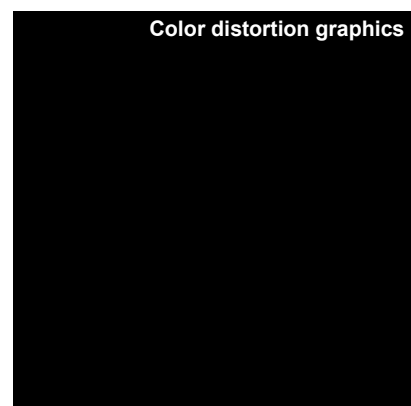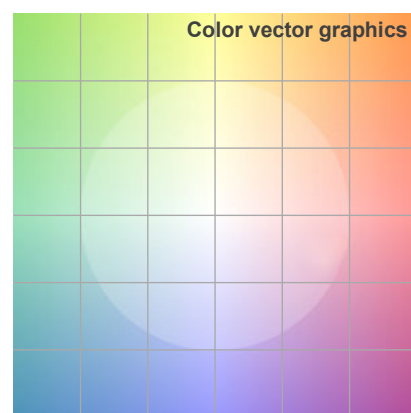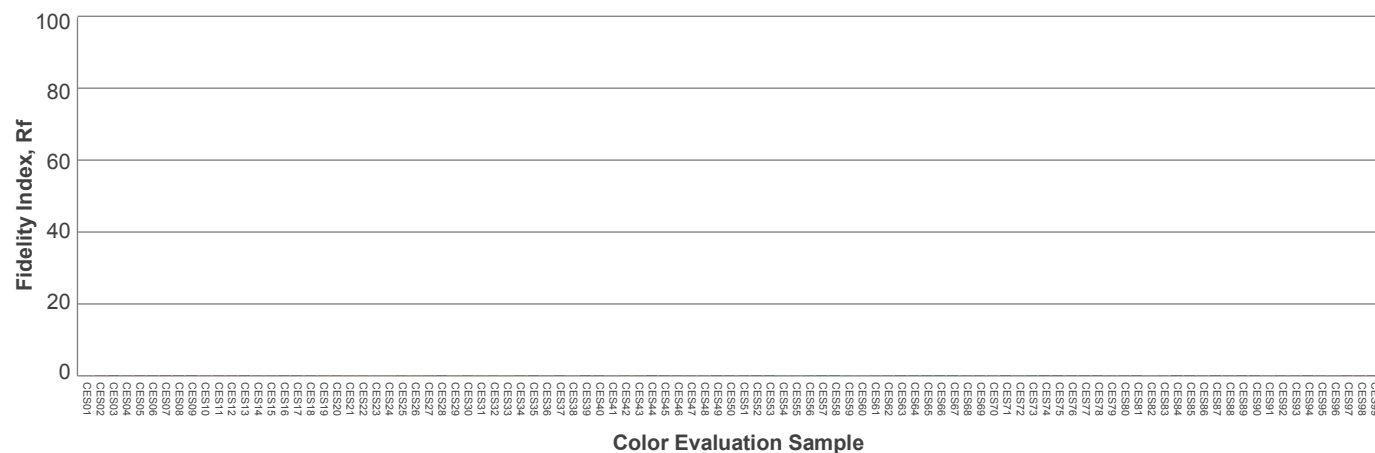

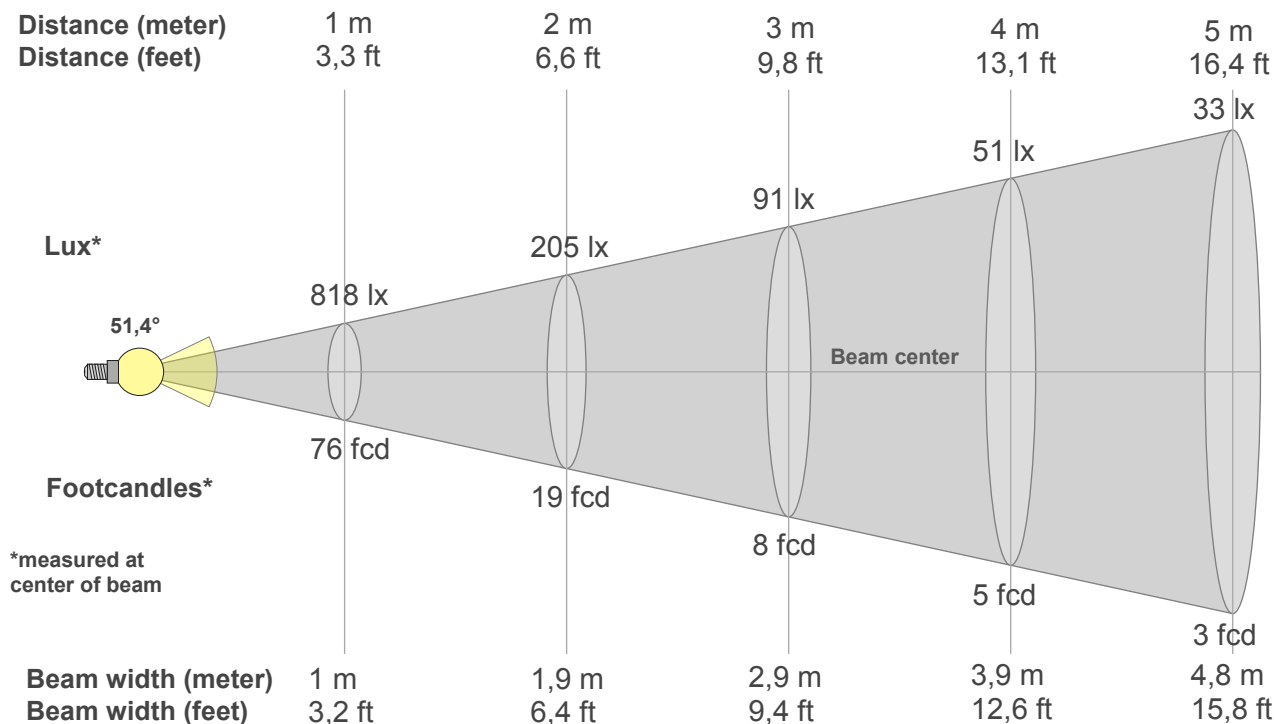

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
818lx	205lx	91lx	51lx	33lx	23lx	17lx	13lx	10lx	8lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx	2lx
76fcd	19fcd	8,4fcd	4,8fcd	3fcd	2,1fcd	1,6fcd	1,2fcd	0,9fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
818	804	786	757	715	661	598	524	445	368	297	237	188	150	122	100	84	74	67	63
100%	98%	96%	92%	87%	81%	73%	64%	54%	45%	36%	29%	23%	18%	15%	12%	10%	9%	8%	8%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
818	820	820	822	822	824	826	828	830	832	833	834	833	829	821	808	788	757	718	671
100%	100%	100%	100%	100%	101%	101%	101%	101%	102%	102%	102%	102%	101%	100%	99%	96%	93%	88%	82%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
818	804	786	757	715	661	598	524	445	368	297	237	188	150	122	100	84	74	67	63
100%	98%	96%	92%	87%	81%	73%	64%	54%	45%	36%	29%	23%	18%	15%	12%	10%	9%	8%	8%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
818	820	820	822	822	824	826	828	830	832	833	834	833	829	821	808	788	757	718	671
100%	100%	100%	100%	100%	101%	101%	101%	101%	102%	102%	102%	102%	101%	100%	99%	96%	93%	88%	82%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
51,4°	90,7°	172,5°	85,2%	70,4%

ISO candela diagram

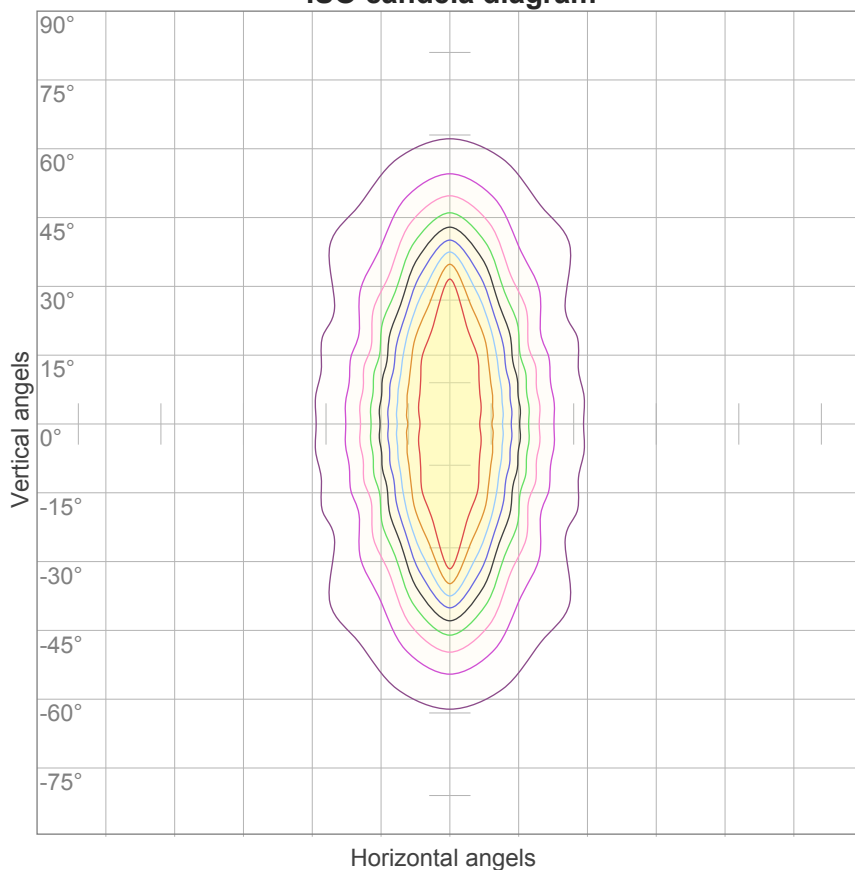


10%	82 cd
20%	164 cd
30%	246 cd
40%	327 cd
50%	409 cd
60%	491 cd
70%	573 cd
80%	655 cd
90%	737 cd

Conditions:

Number of c-planes: 16

Candela at center: 818 cd

ISO lux diagram

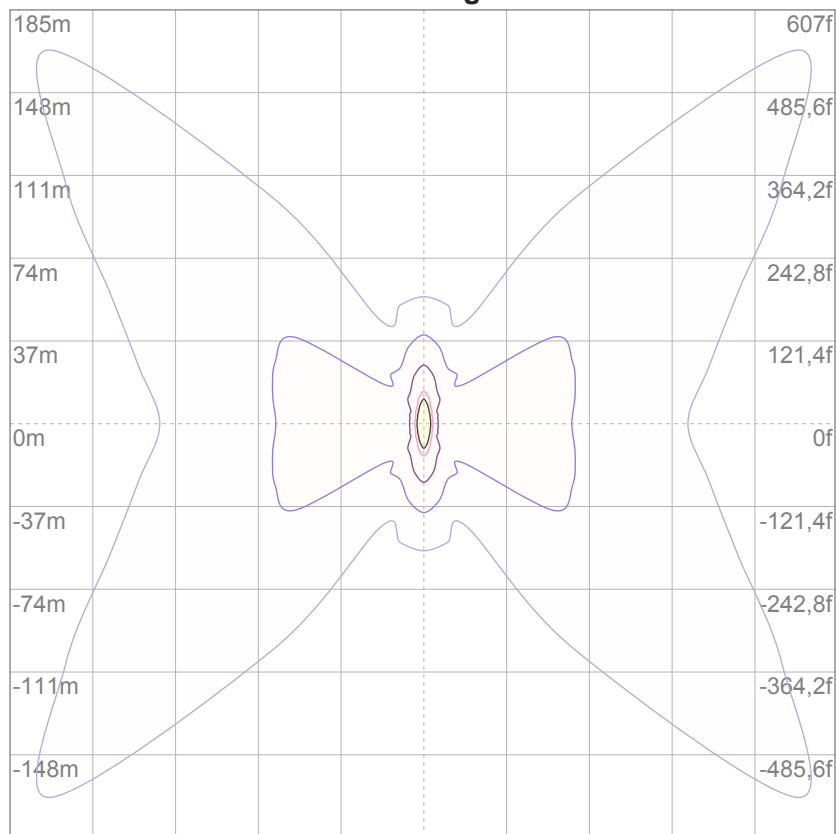

3%	0,246 lx
5%	0,409 lx
10%	0,818 lx
30%	2,46 lx
50%	4,09 lx

Conditions:

Number of c-planes: 16

Lux at center: 8,18 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	15,5	16,5	15,7	16,8	17,0	23,3	24,3	23,5	24,5	24,7
	3H	17,7	18,8	18,1	19,0	19,2	24,0	25,1	24,4	25,3	25,5
	4H	19,4	20,5	19,8	20,7	21,0	24,3	25,3	24,7	25,6	25,9
	6H	21,0	21,9	21,3	22,1	22,5	24,6	25,5	24,9	25,8	26,2
	8H	21,3	22,2	21,7	22,5	22,9	24,7	25,5	25,0	25,9	26,3
	12H	21,5	22,3	21,9	22,7	23,1	24,7	25,5	25,1	25,9	26,3
4H	2H	16,3	17,3	16,7	17,5	17,8	23,1	24,1	23,5	24,3	24,6
	3H	18,8	19,6	19,1	20,0	20,4	24,0	24,9	24,4	25,2	25,6
	4H	20,6	21,4	21,0	21,8	22,3	24,4	25,1	24,8	25,6	26,1
	6H	22,3	23,1	22,8	23,4	23,8	24,7	25,4	25,2	25,8	26,2
	8H	22,7	23,4	23,2	23,8	24,2	24,8	25,5	25,3	25,9	26,2
	12H	23,0	23,5	23,4	24,0	24,4	24,9	25,5	25,4	25,9	26,3
8H	4H	21,0	21,7	21,5	22,1	22,4	24,4	25,1	24,9	25,5	25,8
	6H	23,0	23,5	23,5	24,0	24,5	24,8	25,4	25,3	25,8	26,4
	8H	23,6	24,0	24,1	24,5	25,2	25,1	25,5	25,6	26,0	26,7
	12H	23,9	24,3	24,5	24,8	25,4	25,2	25,6	25,8	26,1	26,7
12H	4H	21,0	21,6	21,5	22,0	22,5	24,4	25,0	24,9	25,4	25,9
	6H	23,1	23,6	23,6	24,1	24,7	24,9	25,4	25,5	25,9	26,6
	8H	23,7	24,1	24,3	24,6	25,2	25,2	25,6	25,8	26,1	26,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					1,0 / -1,0				
S = 1.5H		0,1 / -0,1					2,3 / -1,8				
S = 2.0H		0,2 / -0,2					3,6 / -2,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 902 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	96	94	95	93	91	92	90	88	86
2	102	95	89	84	99	93	88	83	90	85	81	86	83	79	83	80	78	76
3	95	86	79	73	93	84	78	73	81	76	71	79	74	70	76	72	69	67
4	89	78	71	65	86	77	70	65	75	69	64	72	67	63	70	66	62	60
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55
6	78	66	59	53	76	65	58	53	64	57	53	62	57	52	61	56	52	50
7	73	62	54	49	72	61	54	49	59	53	48	58	52	48	57	52	48	46
8	69	57	50	45	68	57	50	45	56	49	45	54	49	44	53	48	44	43
9	65	54	47	42	64	53	46	42	52	46	42	51	45	41	50	45	41	40
10	62	51	44	39	61	50	43	39	49	43	39	48	43	39	47	42	39	37

LAMPS (number of lamps)


Luminaire budgetary diagram

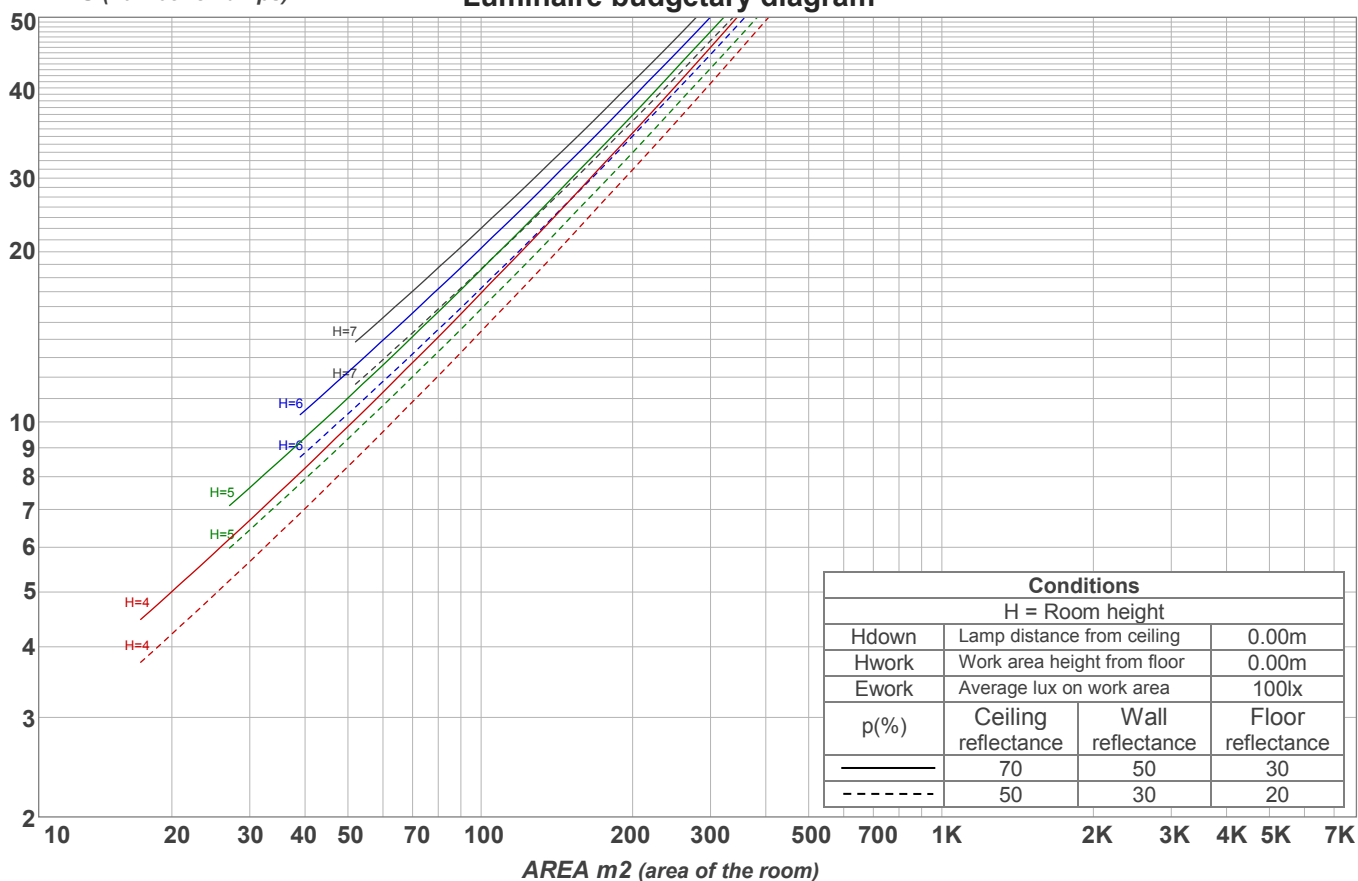

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
74,6 lm	177 lm	181 lm	144 lm	109 lm	82,8 lm	59,2 lm	47,0 lm	27,3 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,040 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm

Warmup curve

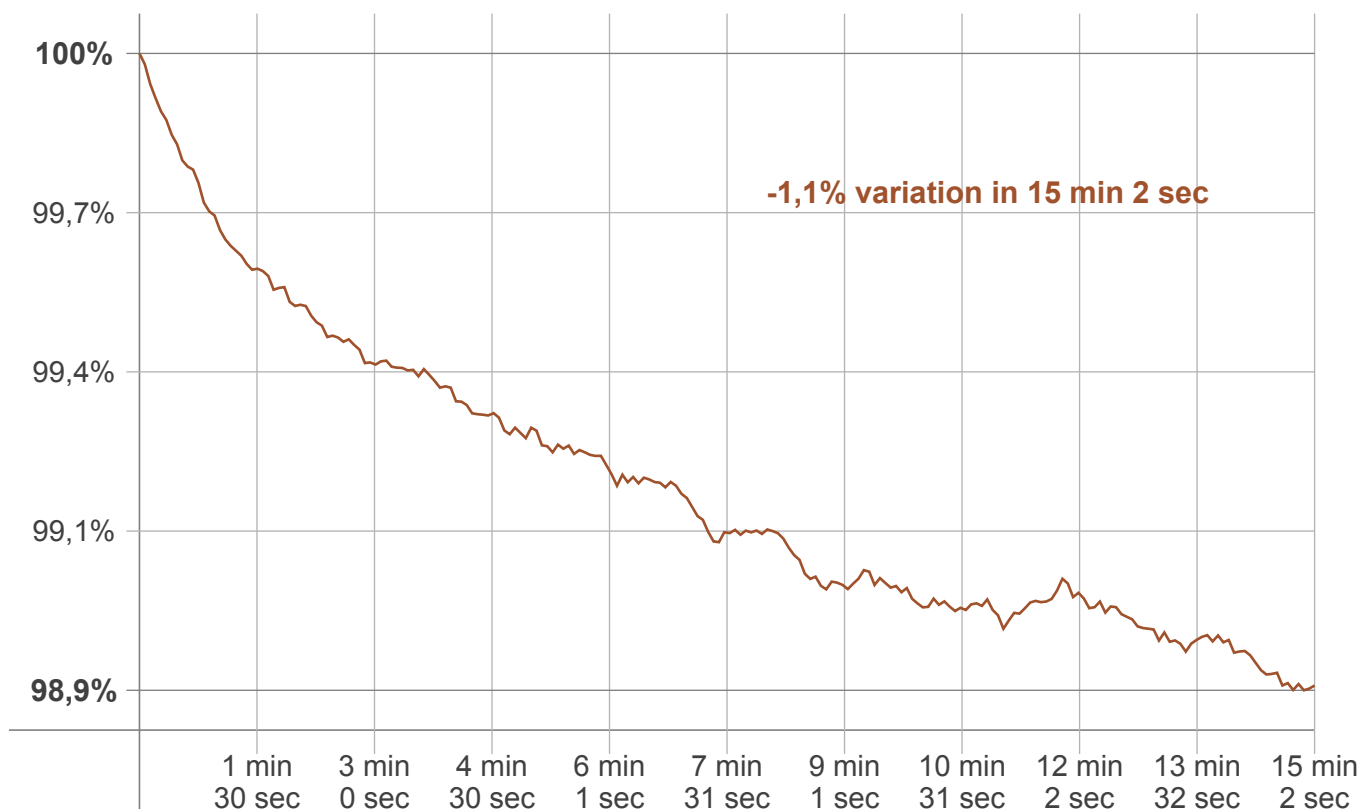

Warmup result

Warmup time:	15 min 2 sec
Warmup variation	-1,1%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
0 K	0 K	0 K

Output change

Output start	Output change	Output end
911 lm	-9 lm	902 lm