

Light efficiency:

92 Lumen/Watt

Light quality:

CRI: 92,4

Color temperature:

3041 K

Output: 932 lm

Peak: 372 cd

Power: 10,1 W

PF: 1,0



Product name:

Pegasus-3-Gold-0508-930-L9T

Item number:

FLNP/L/16A0508/930/L9T

Date and time:

05.05.2021 10:58:53

Description:

Rank: M27ZT

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 K

CRI +/- 0,7

Angular Resolution 1 Grad step


Last Calibration 20-05-2020

Pruefer: Peter Ulrich

Pruefort: Lichtlabor

Gaustrasse13

55411 Bingen am Rhein

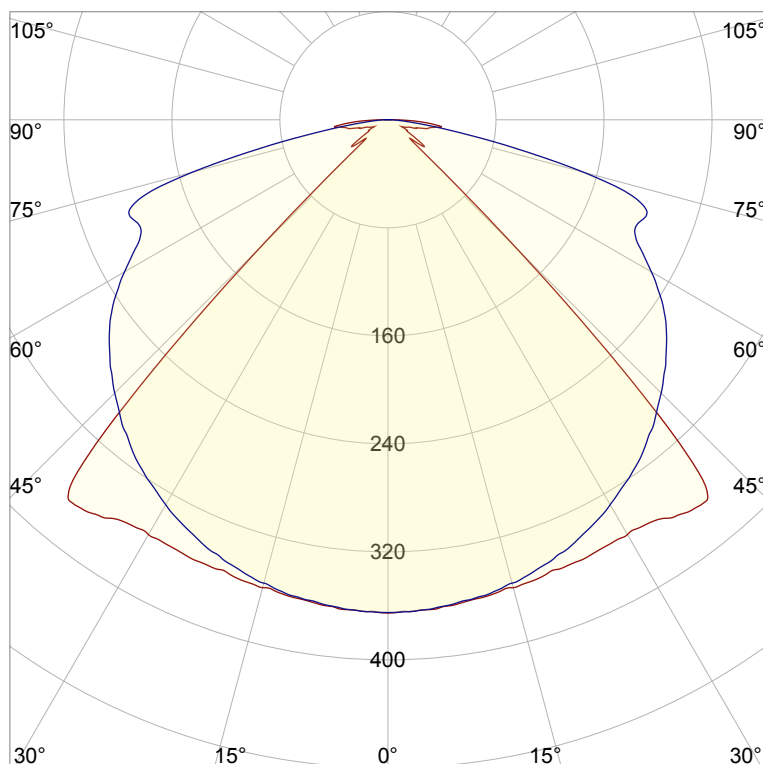


CIE 1931


x: 0,433



y: 0,400

Spectra

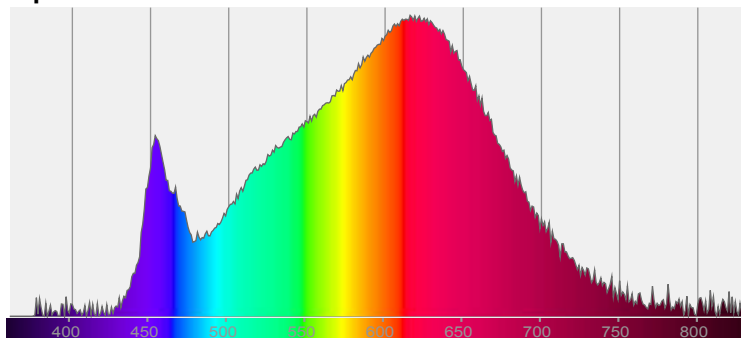


Power

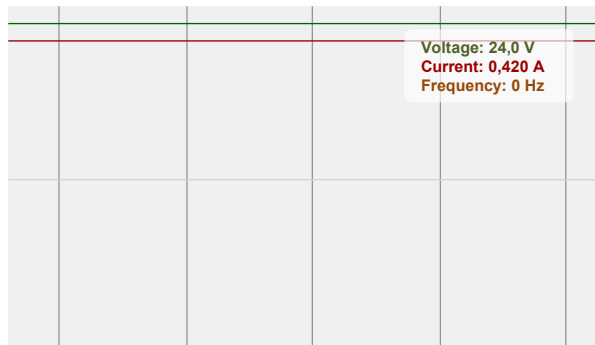


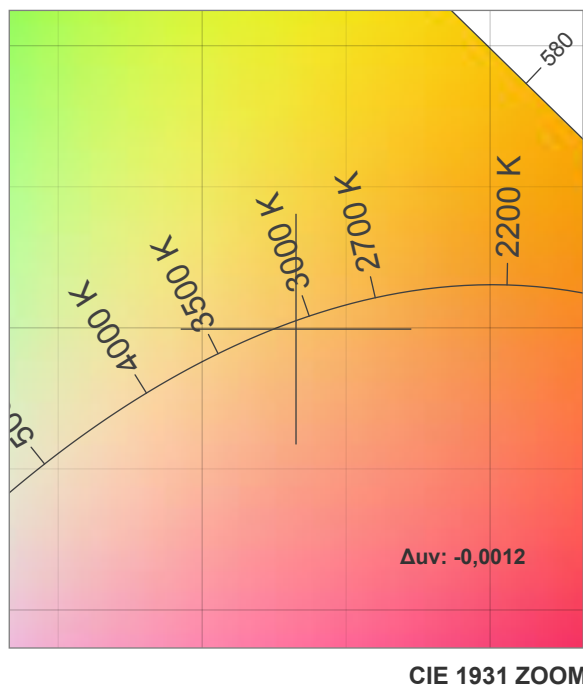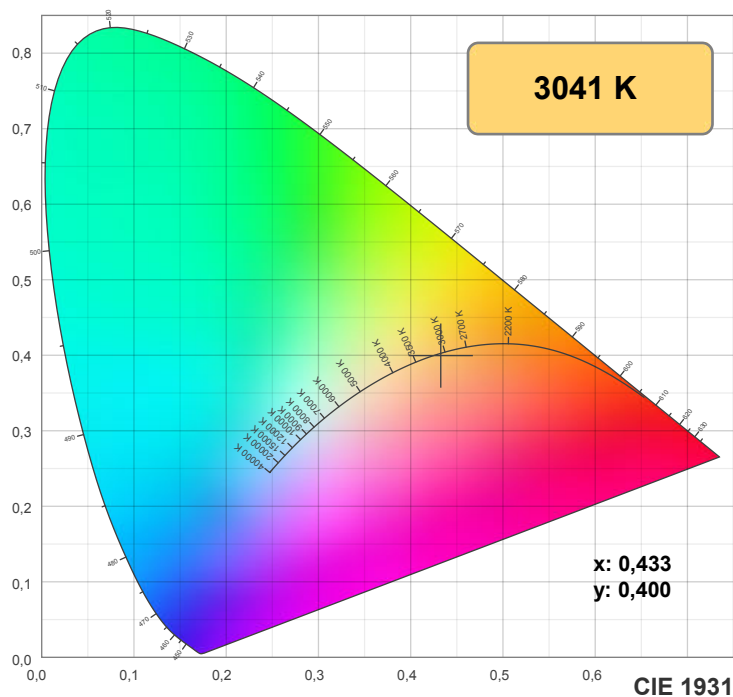

TM30: 90,3

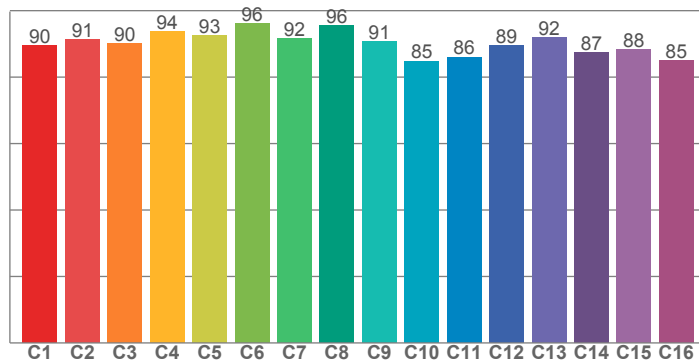

CRI: 92,4 (R1-R8)

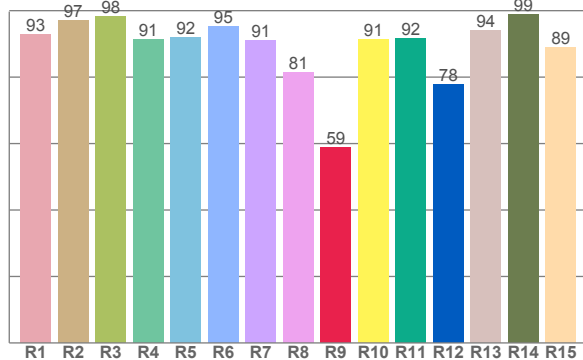

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,8	97,0	98,3	91,4	92,1	95,3	91,2	81,3	59,0	91,4	91,6	77,8	94,1	98,9	89,1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89,6	91,4	90,1	93,7	92,6	96,2	91,6	95,6	90,8	84,9	86,0	89,4	91,9	87,4	88,2	85,1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,4	95,8	87,4	85,2	88,6	90,8	91,1	91,7	97,5	93,8	92,0	91,3	91,2	86,8	87,4

CQS: 89,9

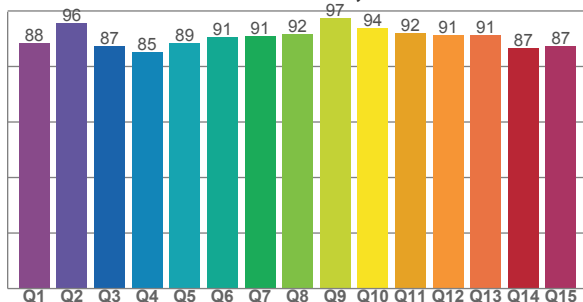

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3041 K	92,4	59,0	90,3	98,2	89,9	0,433	0,400	0,250	0,346	-0,0012







Rf 90,3


Fidelity index Rf

Rg 98,2

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	90	-5%	1%
2	91	-3%	3%
3	90	-1%	5%
4	94	-2%	1%
5	93	-3%	1%
6	96	0%	-1%
7	92	-4%	0%
8	96	-2%	1%
9	91	-2%	6%
10	85	-1%	9%
11	86	3%	10%
12	89	6%	2%
13	92	3%	-5%
14	87	4%	-9%
15	88	-2%	-6%
16	85	-2%	-11%

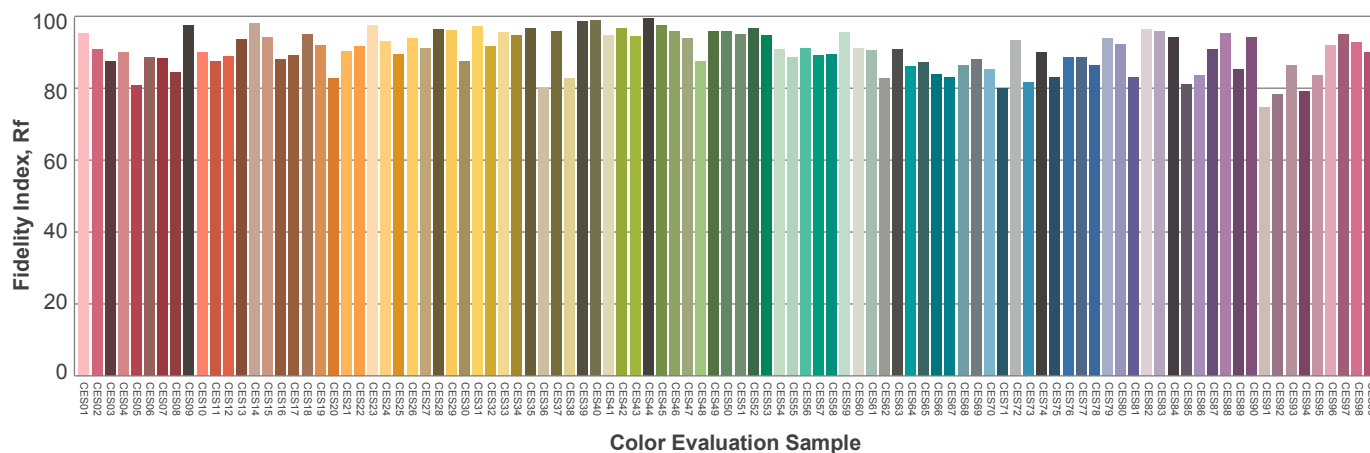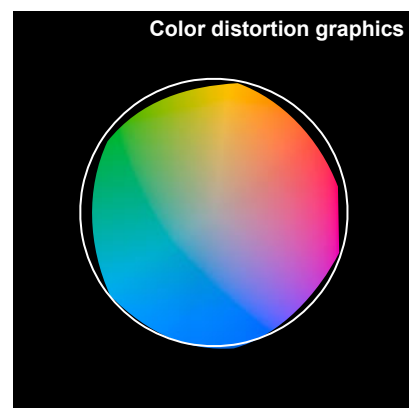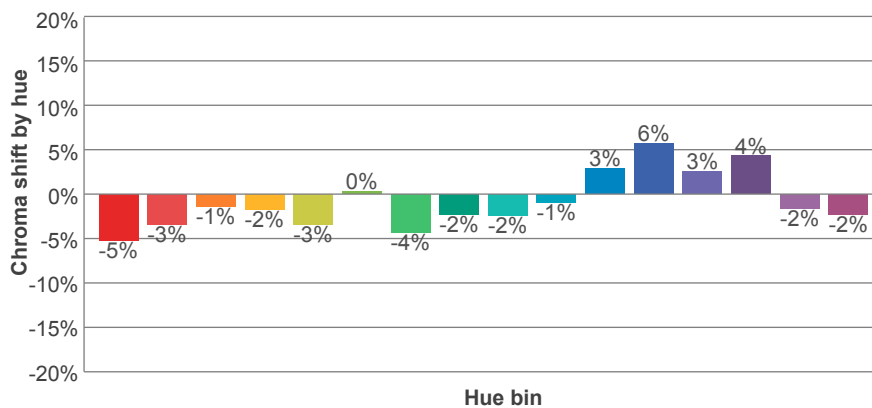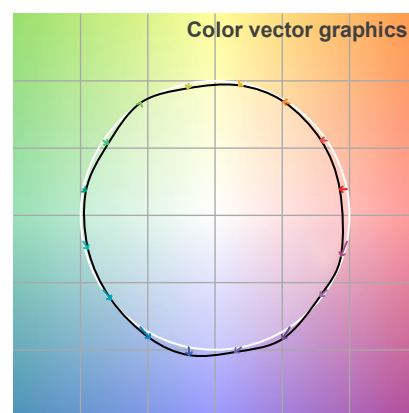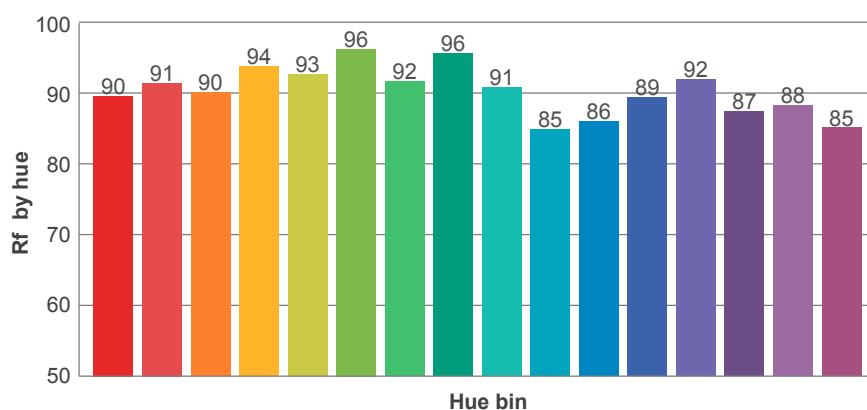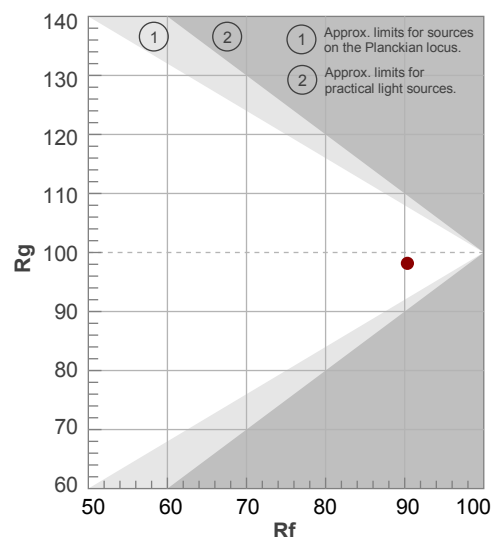

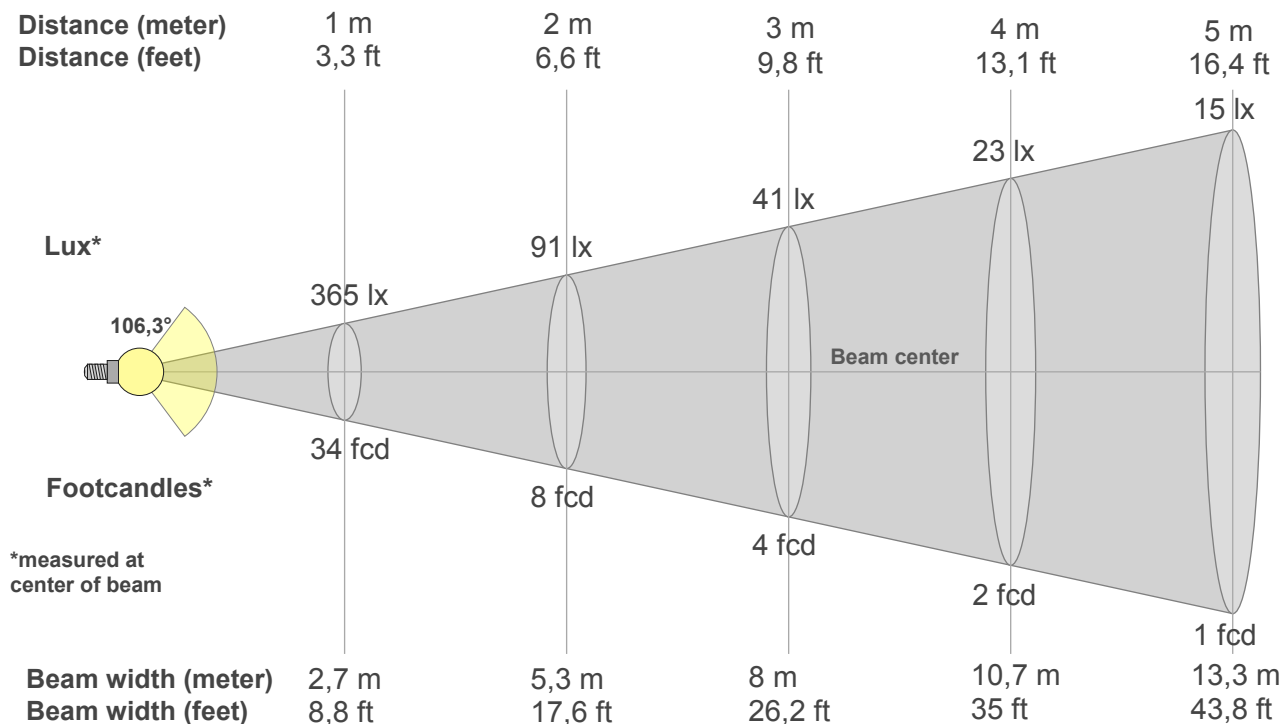

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
365lx	91lx	41lx	23lx	15lx	10lx	7lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
33,9fcd	8,5fcd	3,8fcd	2,1fcd	1,4fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
365	364	361	359	355	356	355	360	367	135	21	30	16	13	16	23	33	31	6	6
100%	100%	99%	98%	97%	98%	97%	99%	101%	37%	6%	8%	4%	4%	4%	6%	9%	8%	2%	2%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
365	364	360	355	349	340	329	317	302	286	269	250	225	202	204	149	52	12	1	1
100%	100%	99%	97%	96%	93%	90%	87%	83%	78%	74%	69%	62%	55%	56%	41%	14%	3%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
365	364	361	359	355	356	355	360	367	135	21	30	16	13	16	23	33	31	6	6
100%	100%	99%	98%	97%	98%	97%	99%	101%	37%	6%	8%	4%	4%	4%	6%	9%	8%	2%	2%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
365	364	360	355	349	340	329	317	302	286	269	250	225	202	204	149	52	12	1	1
100%	100%	99%	97%	96%	93%	90%	87%	83%	78%	74%	69%	62%	55%	56%	41%	14%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
106,3°	123,6°	171,1°	88,1%	67,3%

ISO candela diagram

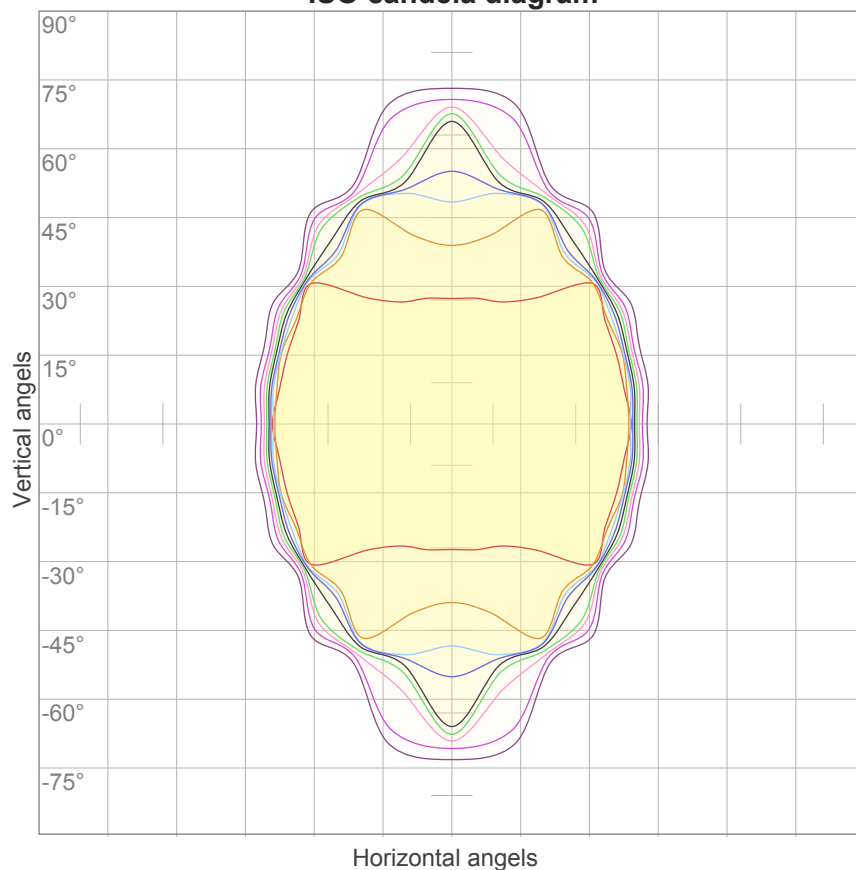


10%	36 cd
20%	73 cd
30%	109 cd
40%	146 cd
50%	182 cd
60%	219 cd
70%	255 cd
80%	292 cd
90%	328 cd

Conditions:

Number of c-planes: 16

Candela at center: 365 cd

ISO lux diagram

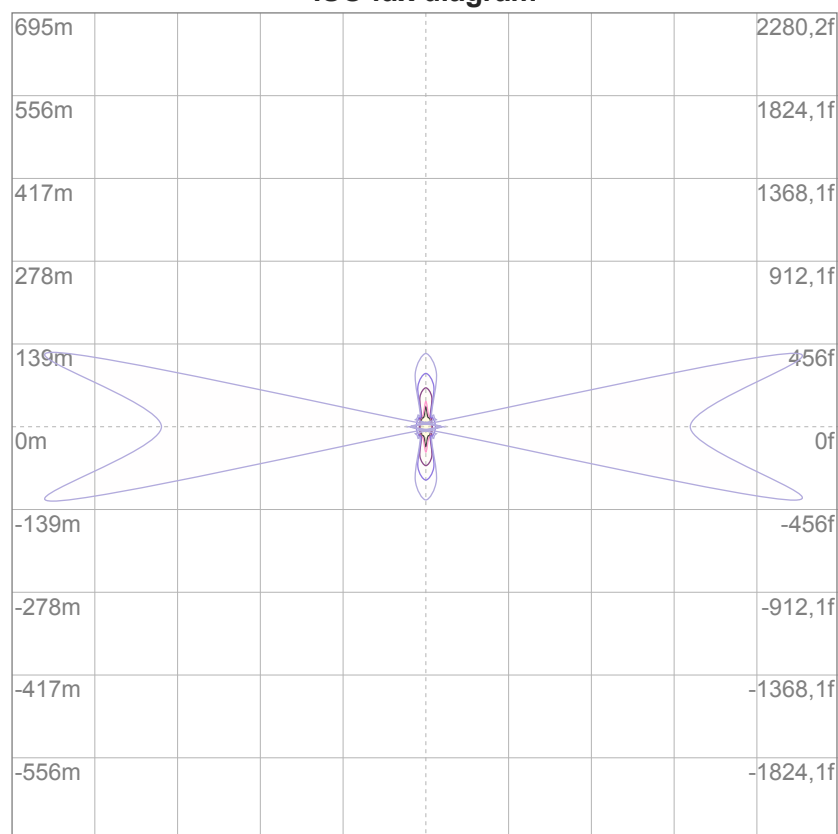

Mounting height: 10 meters (33 feet)

3%	0,109 lx
5%	0,182 lx
10%	0,365 lx
30%	1,09 lx
50%	1,82 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,65 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19,4	20,4	19,6	20,7	20,9	25,1	26,2	25,3	26,5	26,7
	3H	19,2	20,3	19,6	20,6	20,8	26,6	27,7	27,0	28,0	28,2
	4H	19,3	20,4	19,7	20,6	20,9	27,7	28,7	28,1	29,0	29,2
	6H	19,9	20,8	20,2	21,1	21,4	28,2	29,1	28,5	29,4	29,8
	8H	20,3	21,2	20,7	21,5	21,9	28,2	29,1	28,6	29,4	29,8
	12H	20,8	21,7	21,2	22,0	22,4	28,2	29,1	28,6	29,4	29,9
4H	2H	19,4	20,5	19,8	20,8	21,0	24,8	25,9	25,2	26,1	26,4
	3H	19,4	20,3	19,8	20,6	21,1	26,4	27,3	26,8	27,6	28,1
	4H	19,5	20,3	20,0	20,8	21,3	27,4	28,2	27,9	28,7	29,2
	6H	20,3	21,0	20,8	21,4	21,8	27,9	28,7	28,4	29,1	29,4
	8H	21,0	21,7	21,5	22,0	22,4	28,0	28,7	28,5	29,1	29,4
	12H	21,6	22,2	22,1	22,6	23,1	28,0	28,6	28,5	29,0	29,5
8H	4H	19,5	20,2	20,0	20,6	20,9	27,3	28,0	27,8	28,4	28,8
	6H	20,4	21,0	20,9	21,4	22,0	27,8	28,4	28,3	28,8	29,4
	8H	21,4	21,9	21,9	22,4	23,0	27,9	28,4	28,4	28,9	29,5
	12H	22,4	22,8	23,0	23,3	23,9	28,0	28,3	28,5	28,8	29,4
12H	4H	19,5	20,1	20,0	20,5	20,9	27,3	27,9	27,8	28,3	28,8
	6H	20,5	20,9	21,0	21,5	22,1	27,8	28,3	28,3	28,8	29,4
	8H	21,5	21,9	22,1	22,4	23,0	27,9	28,3	28,5	28,8	29,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		1,1 / -1,1					0,5 / -0,8				
S = 1.5H		2,3 / -1,2					1,7 / -3,3				
S = 2.0H		3,6 / -1,4					2,9 / -6,0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 932 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	110	105	102	98	107	103	100	97	98	96	93	94	92	90	90	89	87	85
2	101	94	88	83	98	92	86	82	88	84	80	85	81	78	81	78	76	73
3	93	84	77	71	91	82	76	70	79	73	69	76	71	67	73	69	66	64
4	86	75	68	62	84	74	67	61	71	65	60	69	63	59	66	62	58	56
5	80	68	60	54	78	67	59	53	65	58	53	62	57	52	60	55	51	49
6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	55	50	46	44
7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	50	45	41	39
8	64	51	43	38	62	51	43	38	49	42	37	48	42	37	46	41	37	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	37	33	31
10	56	43	36	31	55	43	36	31	42	35	31	41	35	30	40	34	30	28

LAMPS (number of lamps)


Luminaire budgetary diagram

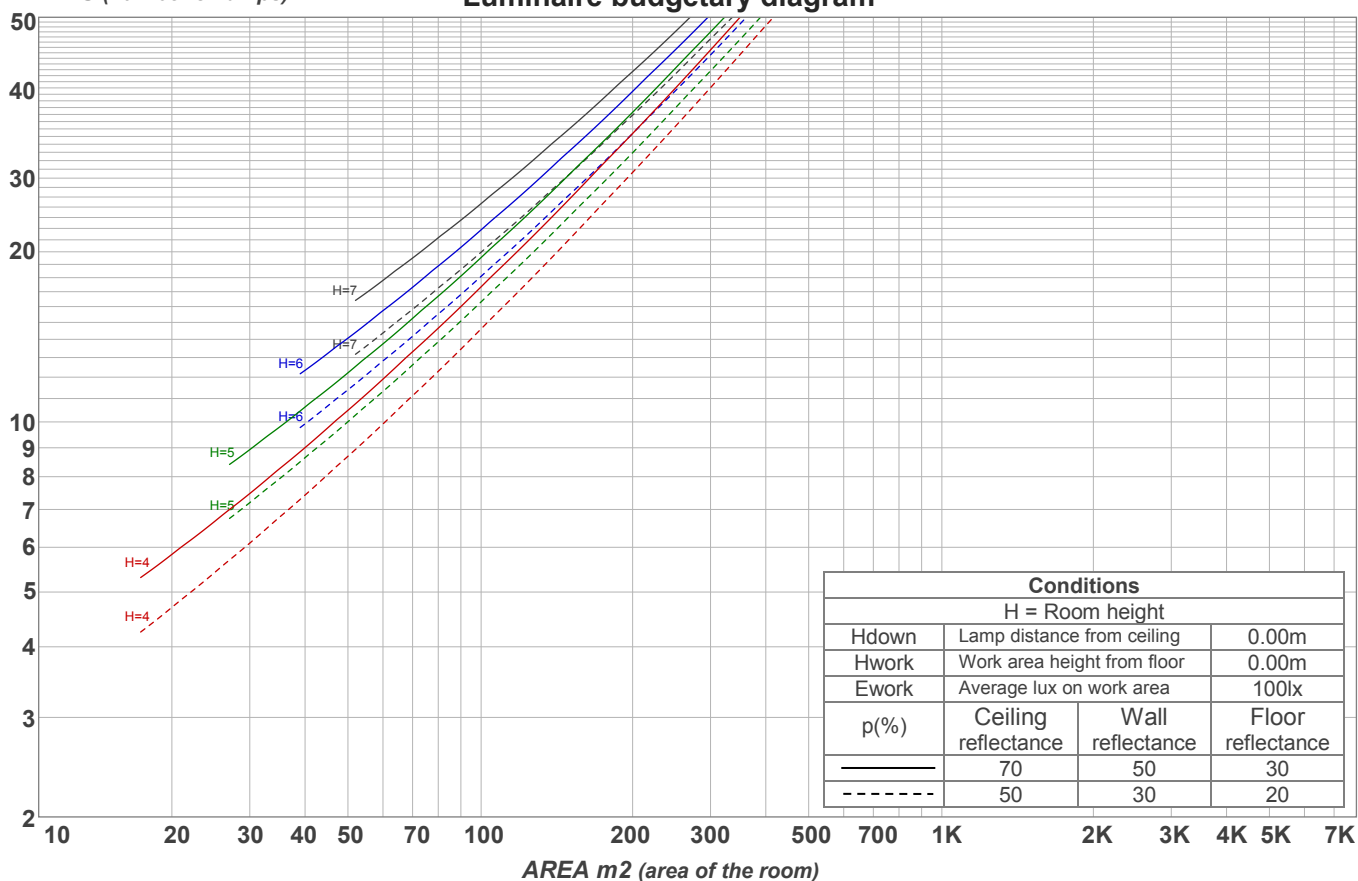

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
34,6 lm	101 lm	160 lm	213 lm	207 lm	106 lm	41,0 lm	30,8 lm	18,4 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
6,76 lm	3,33 lm	2,87 lm	2,59 lm	1,86 lm	1,26 lm	0,926 lm	0,567 lm	0,191 lm

Warmup curve

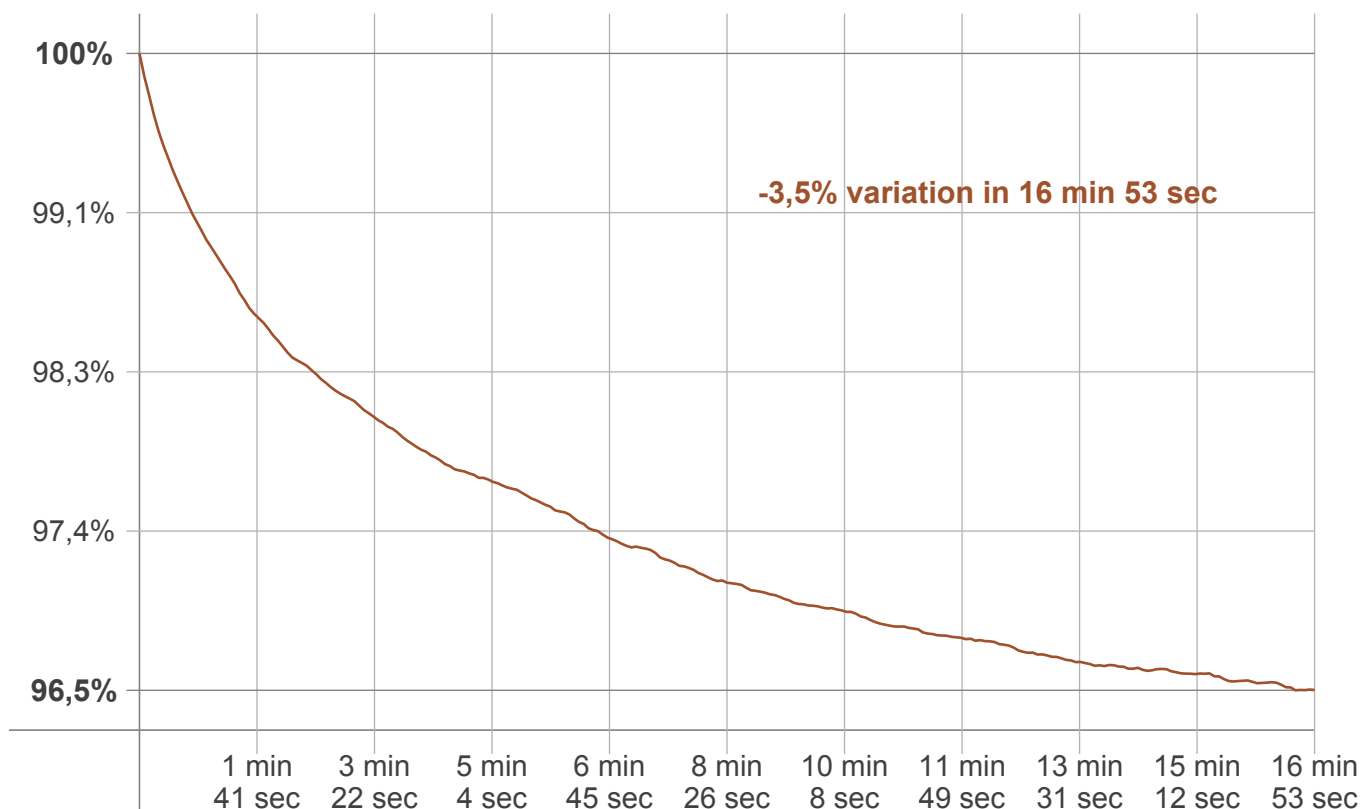

Warmup result

Warmup time:	16 min 53 sec
Warmup variation	-3,5%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
3047 K	-6 K	3041 K

Output change

Output start	Output change	Output end
962 lm	-30 lm	932 lm