Light efficiency:

117 Lumen/Watt

Light quality:


CRI: 94,5


Color temperature:

2700 K

Output: 281 lm
Peak: 440 cd

Power: 2,4 W
PF: 1,0

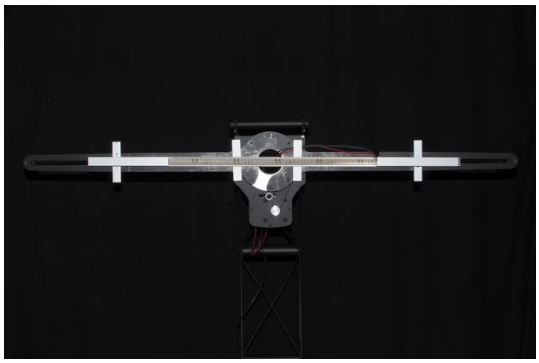

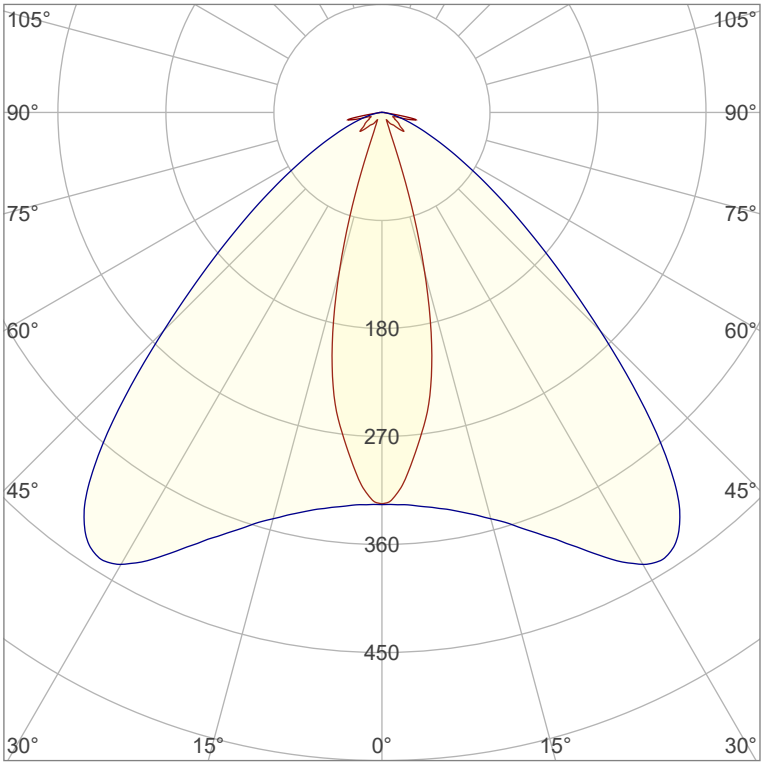

Product name:
Sta-Maria-6_510mm_927_Lens-30°-Transparent


Item number:
NP/L1C/01E/0510/927/L3T

Date and time:
29.06.2022 10:42:36


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,460
y: 0,411


Spectra

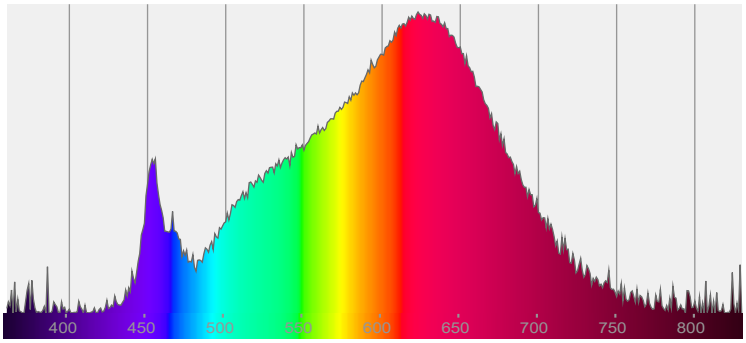


Power

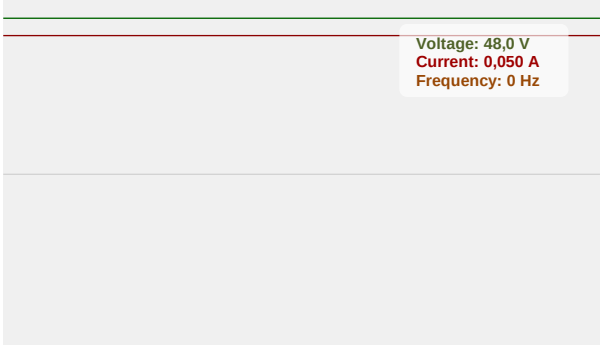


Color details

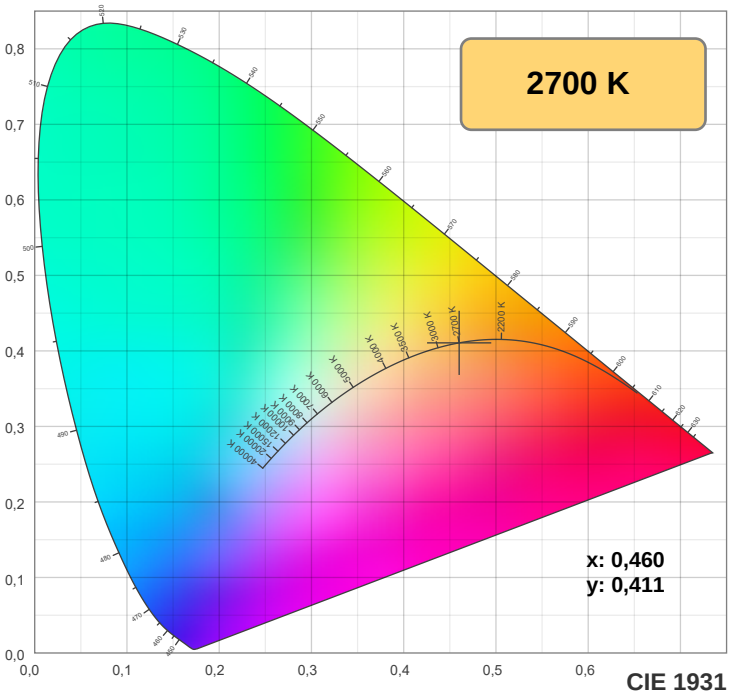


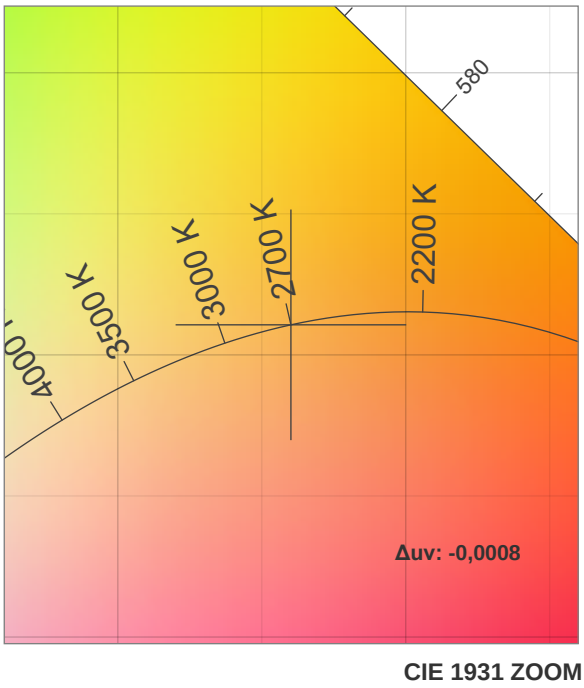

TM30: 92,0

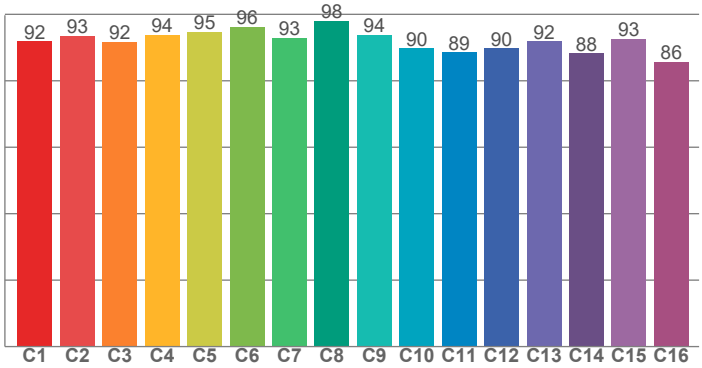

CRI: 94,5 (R1-R8)

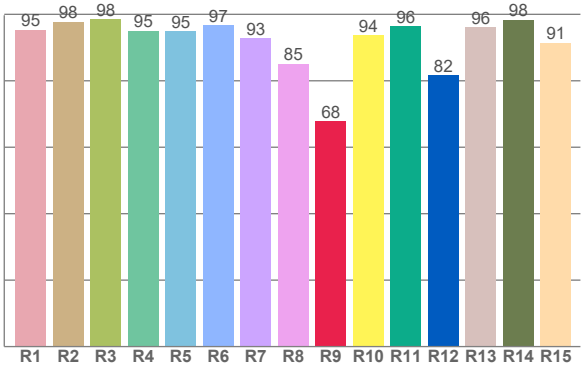

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,3	97,8	98,5	95,1	95,0	96,7	92,9	85,2	67,7	93,8	96,4	81,7	96,2	98,4	91,5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,9	93,5	91,8	93,8	94,7	96,2	92,9	98,0	93,8	89,7	88,5	89,7	91,9	88,2	92,6	85,7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,7	95,2	88,9	88,7	92,2	93,5	91,4	92,4	97,2	94,4	93,9	93,3	93,1	89,1	89,2

CQS: 91,6

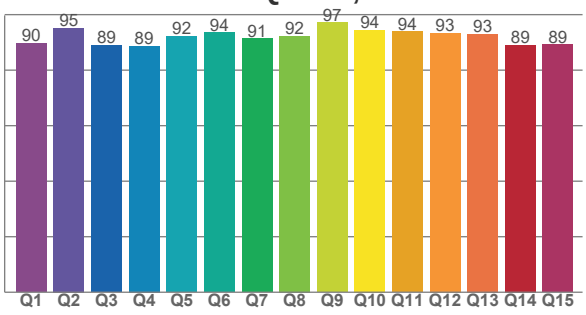

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	94,5	67,7	92,0	99,7	91,6	0,460	0,411	0,263	0,352	-0,0008

TM30 details


Rf 92,0


Fidelity index Rf


Rg 99,7


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	92	-4%	1%
2	93	-3%	2%
3	92	-1%	4%
4	94	-2%	0%
5	95	-1%	2%
6	96	1%	0%
7	93	-3%	0%
8	98	0%	0%
9	94	-1%	3%
10	90	0%	7%
11	89	3%	8%
12	90	6%	1%
13	92	3%	-5%
14	88	4%	-8%
15	93	-2%	-3%
16	86	-1%	-11%

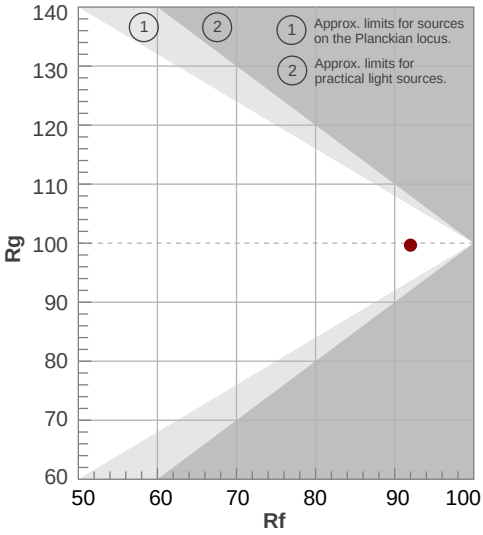


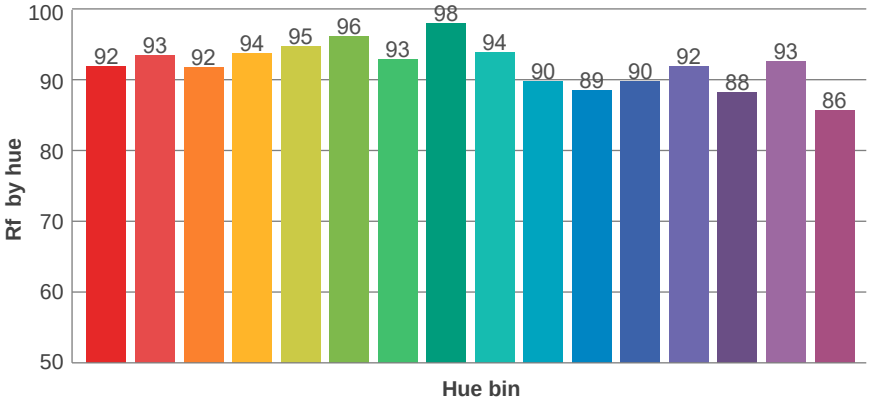

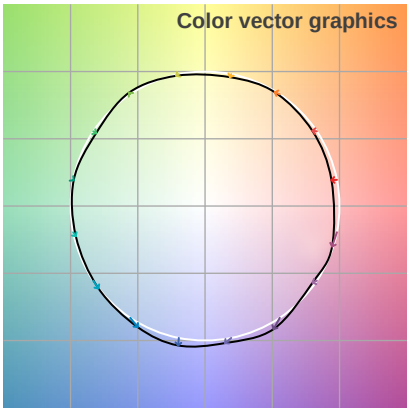


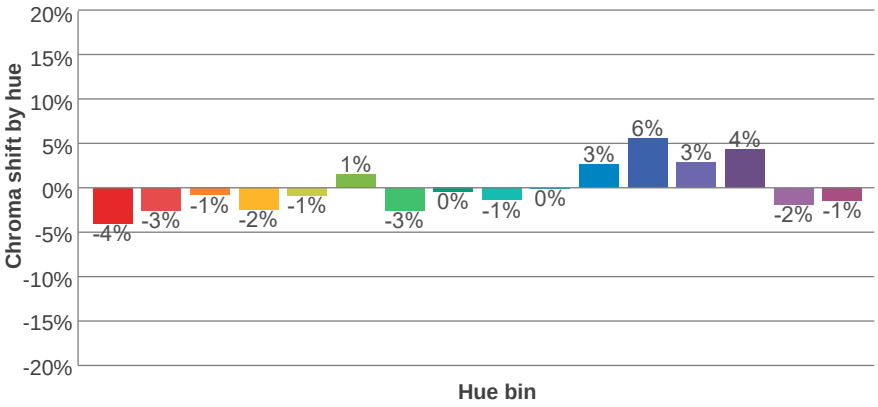

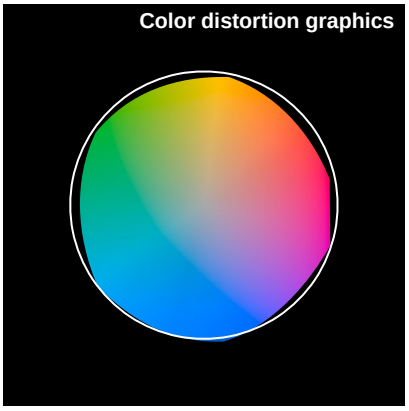

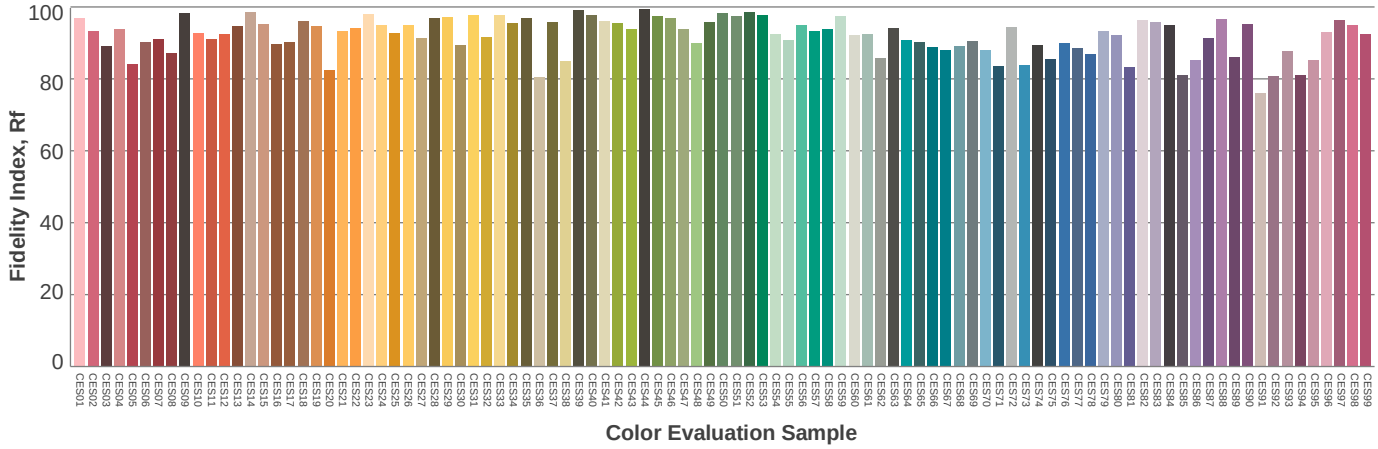

Beam details

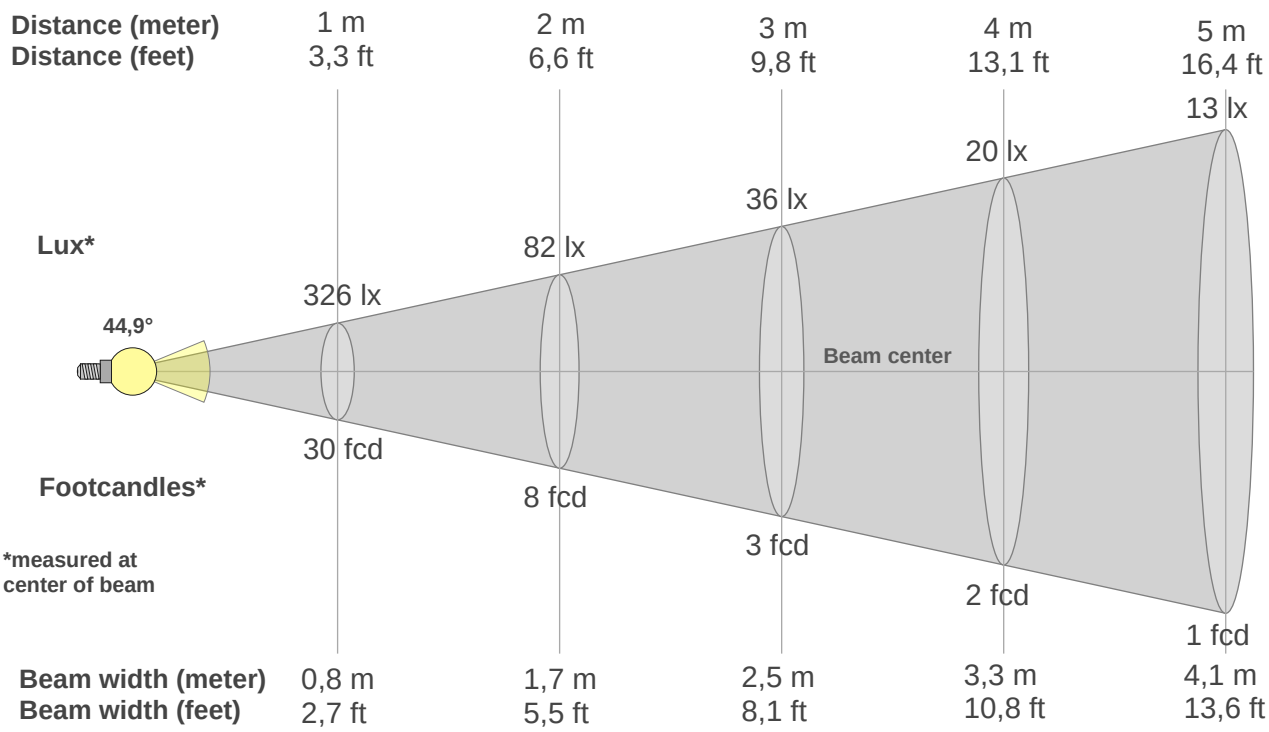

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
326lx	82lx	36lx	20lx	13lx	9lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
30,3fcd	7,6fcd	3,4fcd	1,9fcd	1,2fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
326	319	302	281	259	233	199	159	115	73	38	21	15	11	9	8	7	8	11	12
100%	98%	93%	86%	79%	71%	61%	49%	35%	22%	12%	6%	4%	3%	3%	2%	2%	3%	3%	4%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
326	327	328	330	333	337	341	347	354	363	372	383	396	410	424	435	440	435	422	398
100%	100%	101%	101%	102%	103%	105%	106%	108%	111%	114%	117%	121%	126%	130%	133%	135%	133%	129%	122%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
326	319	302	281	259	233	199	159	115	73	38	21	15	11	9	8	7	8	11	12
100%	98%	93%	86%	79%	71%	61%	49%	35%	22%	12%	6%	4%	3%	3%	2%	2%	3%	3%	4%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
326	327	328	330	333	337	341	347	354	363	372	383	396	410	424	435	440	435	422	398
100%	100%	101%	101%	102%	103%	105%	106%	108%	111%	114%	117%	121%	126%	130%	133%	135%	133%	129%	122%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
44,9°	**61°**	**158,9°**	**86,6%**	**71,8%**

ISO candela diagram

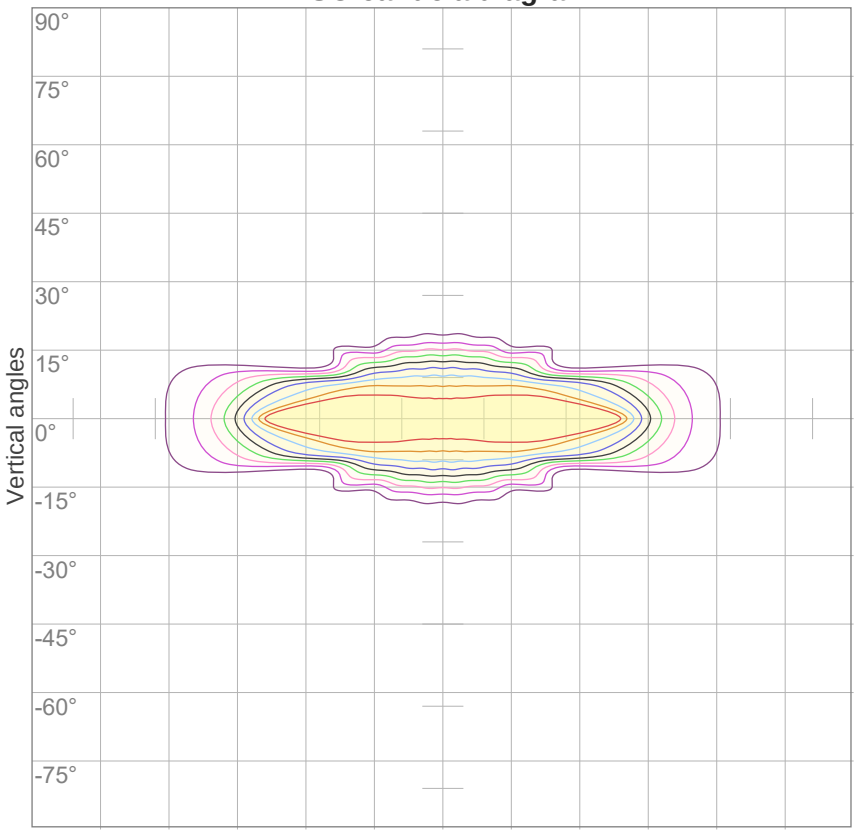


10%	33 cd
20%	65 cd
30%	98 cd
40%	130 cd
50%	163 cd
60%	196 cd
70%	228 cd
80%	261 cd
90%	294 cd

Conditions:

Number of c-planes: 16

Candela at center: 326 cd

ISO lux diagram

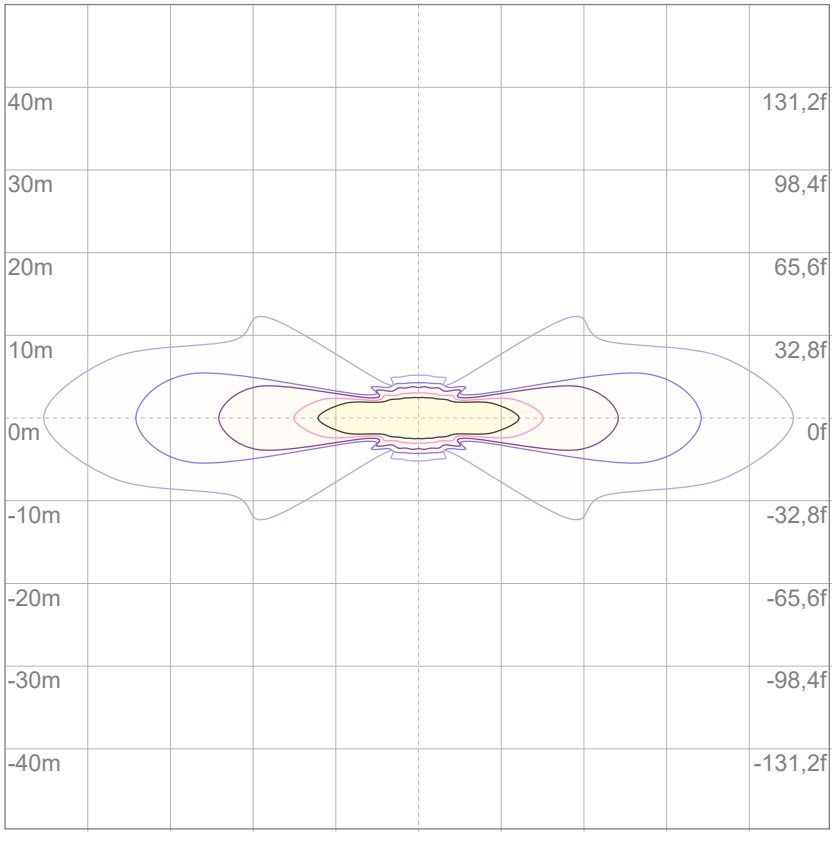

Mounting height: 10 meters (33 feet)

3%	97,9m lx
5%	0,163 lx
10%	0,326 lx
30%	0,979 lx
50%	1,63 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,26 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	9,7	10,7	9,9	10,9	11,1	20,9	21,8	21,0	22,0	22,2
	3H	11,1	12,2	11,5	12,4	12,6	21,2	22,2	21,6	22,5	22,7
	4H	13,6	14,5	14,0	14,8	15,0	21,4	22,4	21,8	22,6	22,9
	6H	17,0	17,8	17,3	18,1	18,4	21,6	22,4	21,9	22,7	23,0
	8H	17,2	18,0	17,5	18,3	18,7	21,6	22,4	21,9	22,7	23,1
	12H	17,1	17,9	17,5	18,3	18,7	21,5	22,3	21,9	22,7	23,1
4H	2H	10,2	11,2	10,6	11,5	11,7	20,5	21,5	20,9	21,8	22,0
	3H	12,0	12,8	12,4	13,1	13,6	21,1	21,9	21,5	22,2	22,7
	4H	14,6	15,4	15,1	15,8	16,3	21,2	22,0	21,7	22,4	22,9
	6H	18,3	19,0	18,8	19,4	19,7	21,4	22,1	21,9	22,4	22,8
	8H	18,6	19,3	19,1	19,6	20,0	21,4	22,1	21,9	22,4	22,8
	12H	18,6	19,1	19,1	19,6	20,0	21,4	22,0	21,9	22,4	22,8
8H	4H	15,0	15,7	15,5	16,0	16,4	21,2	21,8	21,7	22,2	22,6
	6H	19,0	19,5	19,5	19,9	20,5	21,4	21,8	21,9	22,3	22,8
	8H	19,4	19,9	19,9	20,4	21,0	21,5	21,9	22,0	22,4	23,0
	12H	19,5	19,8	20,1	20,3	20,9	21,5	21,9	22,1	22,4	23,0
12H	4H	15,0	15,6	15,5	16,0	16,5	21,2	21,7	21,7	22,1	22,6
	6H	19,1	19,5	19,6	20,0	20,7	21,5	21,9	22,0	22,4	23,0
	8H	19,6	20,0	20,2	20,5	21,1	21,6	21,9	22,2	22,4	23,1
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,0 / 0,0					2,2 / -2,6				
S = 1.5H		0,1 / -0,1					4,2 / -3,9				
S = 2.0H		0,2 / -0,3					5,8 / -4,7				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 281 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	**(RCR: Room Cavity Ratio)**				**Room Values are expressed as percentage of Lumens delivered to the task surface**													
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	98
1	110	106	103	100	107	104	101	98	99	97	94	95	93	91	92	90	88	86
2	103	96	90	86	100	94	89	85	90	86	83	87	84	80	84	81	78	76
3	96	87	81	75	93	86	80	75	83	78	73	80	76	72	77	74	71	69
4	90	80	73	67	88	79	72	67	76	70	66	74	69	65	72	67	64	62
5	84	74	66	61	82	73	66	61	70	65	60	69	63	59	67	62	58	57
6	79	68	61	56	78	67	61	55	66	60	55	64	59	54	62	58	54	52
7	75	64	56	51	73	63	56	51	61	55	51	60	54	50	59	54	50	48
8	71	60	53	48	69	59	52	48	58	51	47	56	51	47	55	50	47	45
9	67	56	49	44	66	55	49	44	54	48	44	53	48	44	52	47	44	42
10	64	53	46	42	63	52	46	42	51	45	41	50	45	41	49	44	41	39

Luminaire budgetary diagram

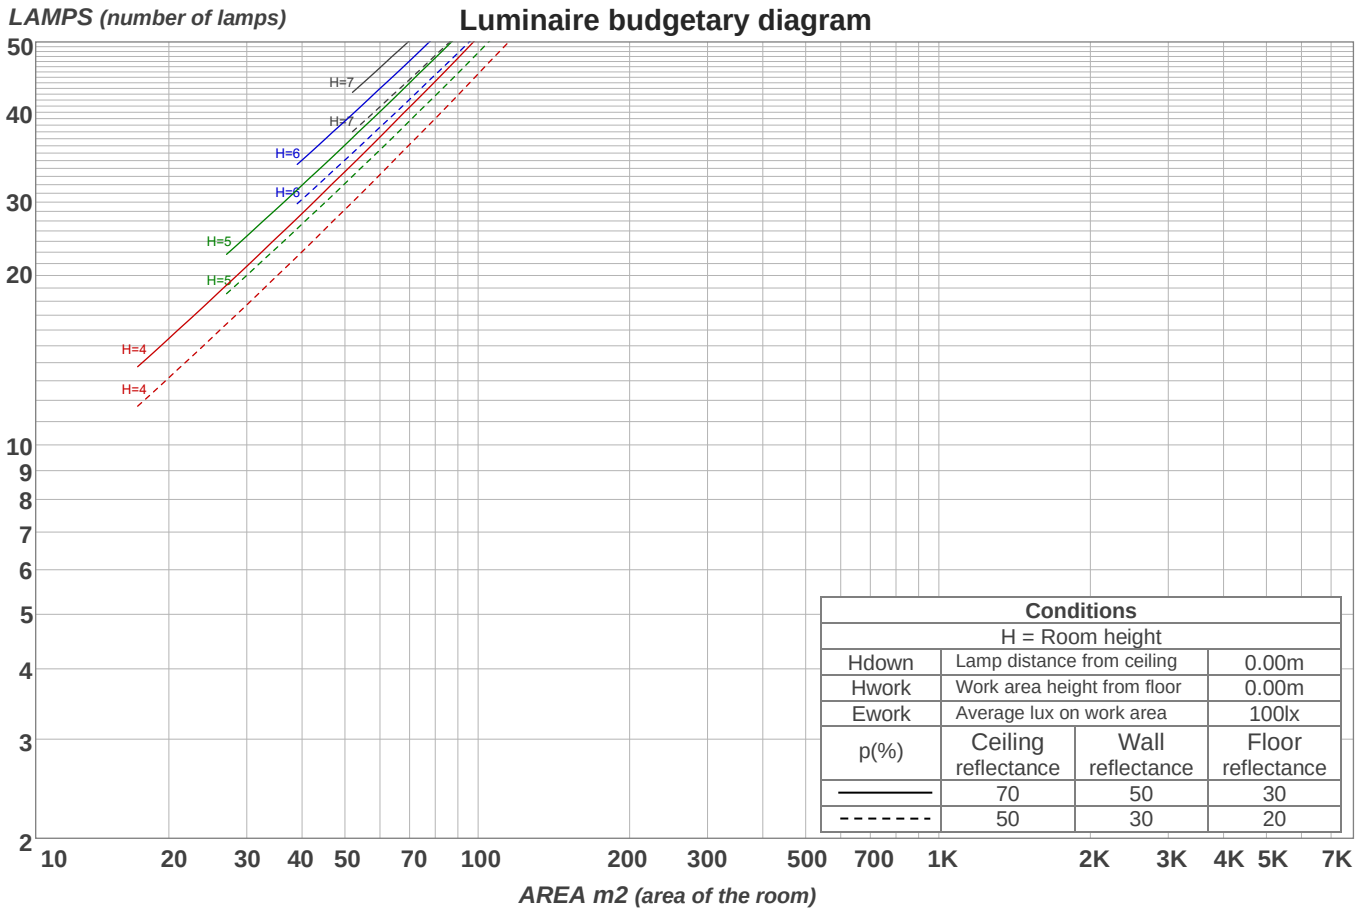


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
28,5 lm	62,0 lm	52,4 lm	40,7 lm	34,4 lm	25,3 lm	14,6 lm	11,9 lm	6,61 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,30 lm	0,777 lm	0,674 lm	0,609 lm	0,471 lm	0,344 lm	0,254 lm	0,155 lm	0,052 lm

Warmup curve

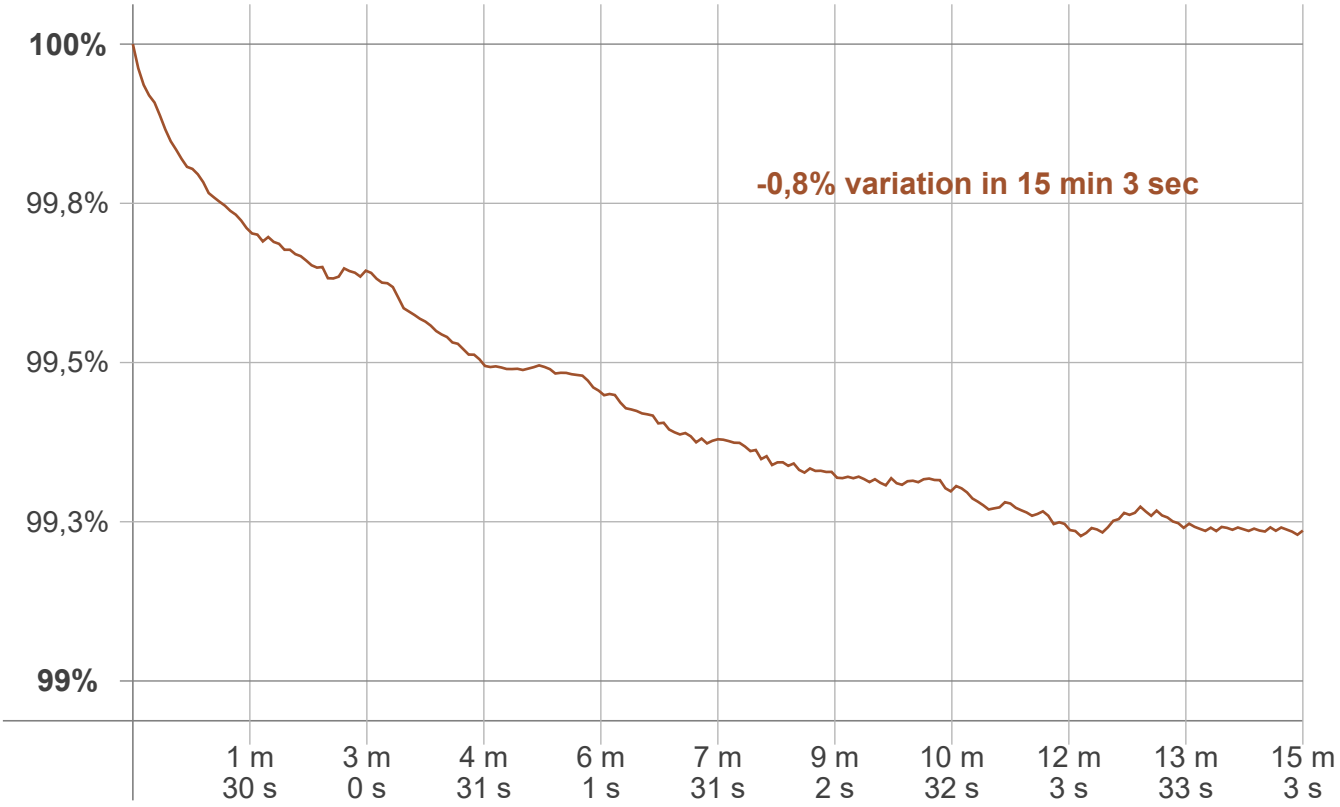

Warmup result

Warmup time:	**Lamp stabilized in 15 min 3 sec**
Warmup variation	**-0,8%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2701 K	-1 K	2700 K

Output change

Output start	Output change	Output end
283 lm	-2 lm	281 lm