

### Light efficiency:

**96 Lumen/Watt**

### Light quality:

**CRI: 95,7**

### Color temperature:


**2468 K**

**Output: 416 lm**

**Peak: 167 cd**

**Power: 4,3 W**

**PF: 1,0**

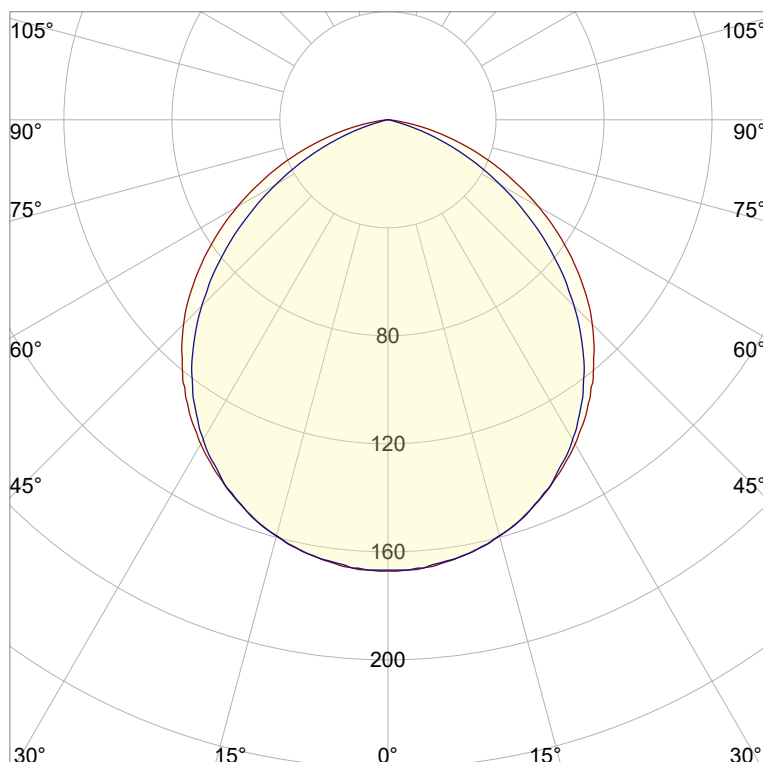

### Product name:

**Victory-7\_510mm\_927\_Cover-Round-Frosted**

### Item number:

**NP/L1C/03F/G1/L1C/0510/927/CRF**

### Date and time:

**01.06.2022 09:52:39**

### Description:

**Rank: C80-AD-8GB**

**Tolerances:**

**Lumen +/-4%**

**Candela +/-2,5%**

**Colour Temp +/-35 Kelvin**

**CRI +/-0,7**

**Angular Resolution: 1 Degree Step**

**Last Calibration 20-09-2021**

**Tester: Peter Ulrich**

**Test Site: Lichtlabor**

**Gaustrasse 13**

**55411 Bingen am Rhein**




**CIE 1931**

**x: 0,483**



**y: 0,418**

### Spectra

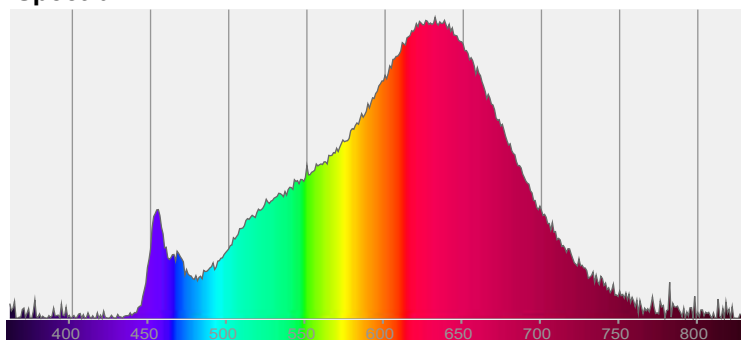



### Power

**Voltage: 48,0 V**  
**Current: 0,090 A**  
**Frequency: 0 Hz**

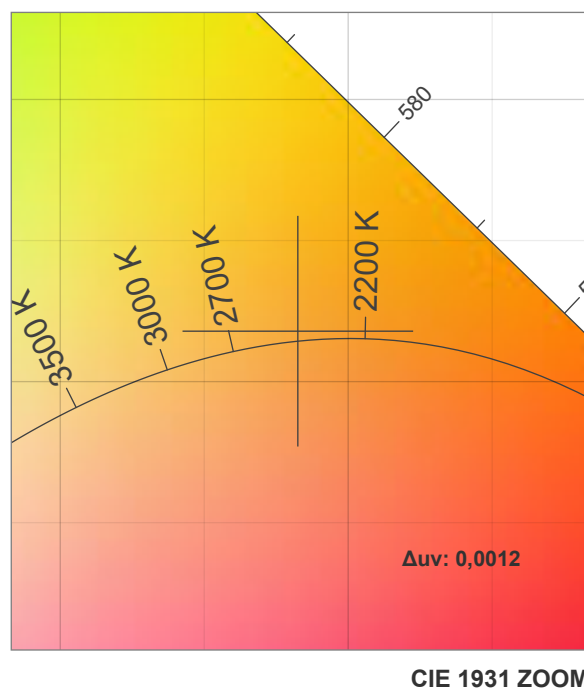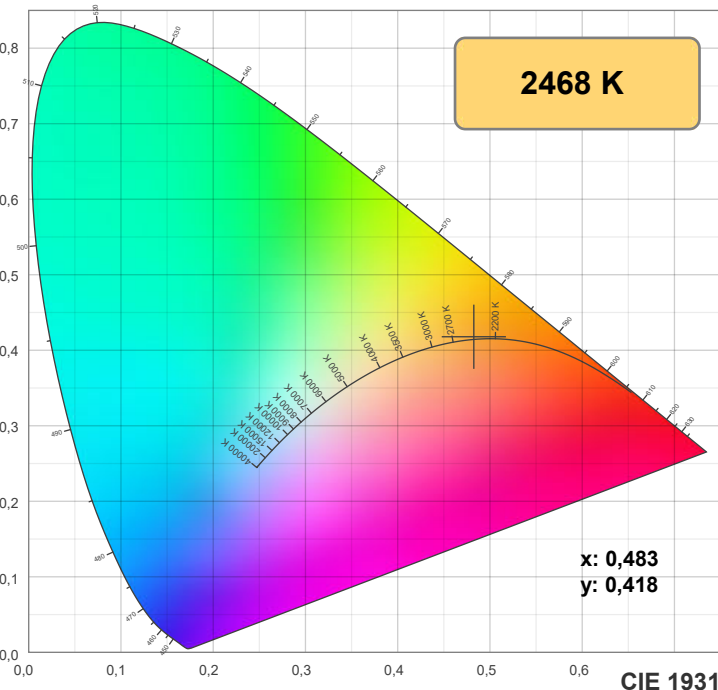

**TM30: 90,6**

**CRI: 95,7 (R1-R8)**

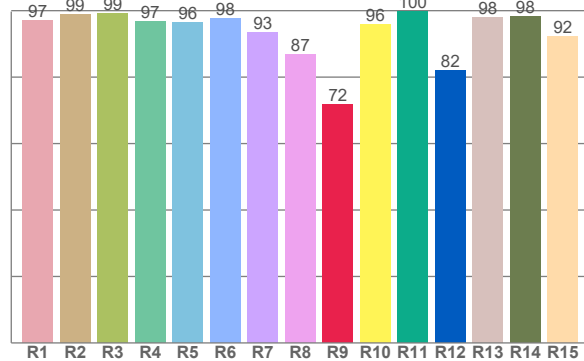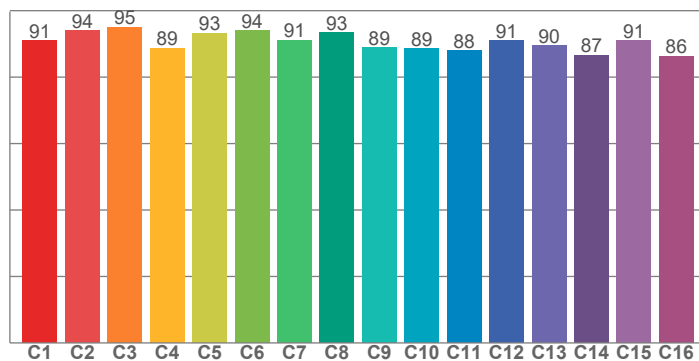

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97,0	98,9	99,1	96,7	96,5	97,5	93,3	86,7	71,6	96,0	99,6	82,0	97,9	98,1	92,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
90,9	94,0	95,1	88,7	93,3	94,0	91,1	93,4	89,0	88,7	87,9	91,1	89,6	86,6	91,0	86,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
85,8	92,0	91,1	89,6	90,2	91,7	94,5	94,5	91,4	90,0	91,5	92,9	93,9	88,9	88,5

**CQS: 90,6**

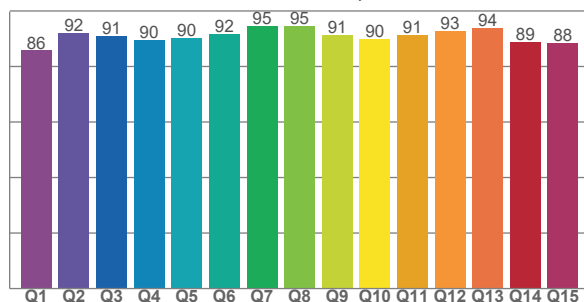

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
2468 K	95,7	71,6	90,6	97,4	90,6	0,483	0,418	0,274	0,356	0,0012







**Rf 90,6**


Fidelity index Rf

**Rg 97,4**

Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	91	-3%	2%
2	94	-2%	1%
3	95	-2%	0%
4	89	-7%	-4%
5	93	-6%	1%
6	94	-3%	3%
7	91	-4%	4%
8	93	-1%	4%
9	89	-1%	7%
10	89	1%	7%
11	88	5%	7%
12	91	4%	-1%
13	90	2%	-9%
14	87	2%	-9%
15	91	-4%	-1%
16	86	-2%	-9%

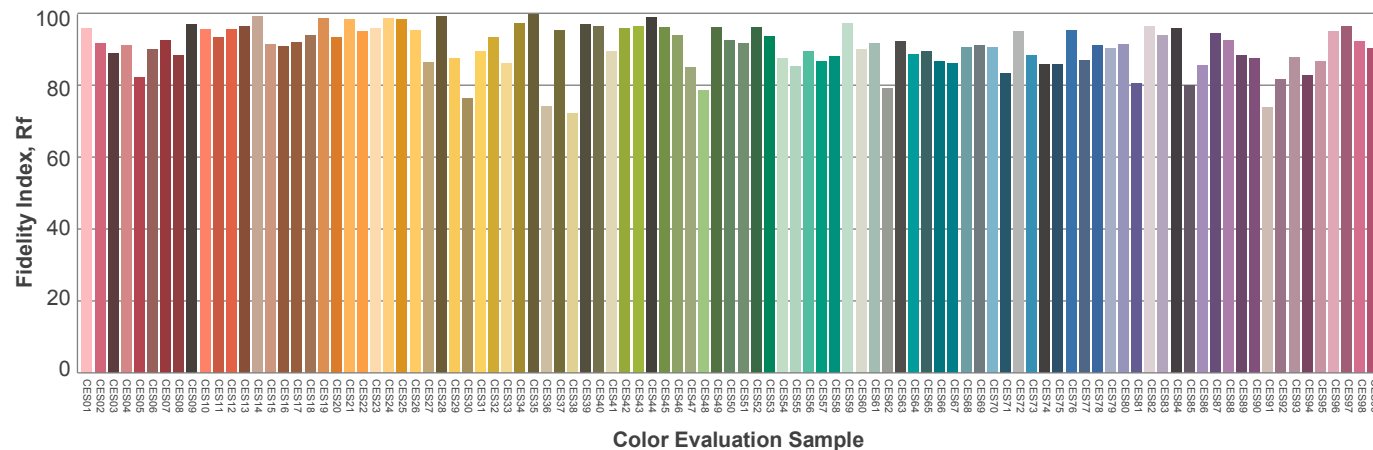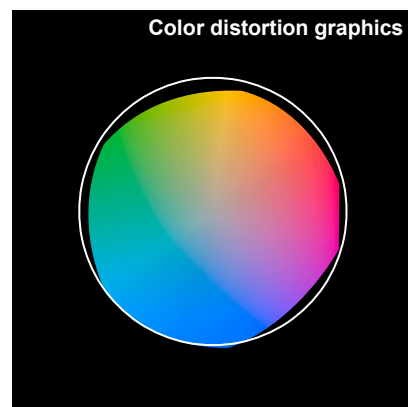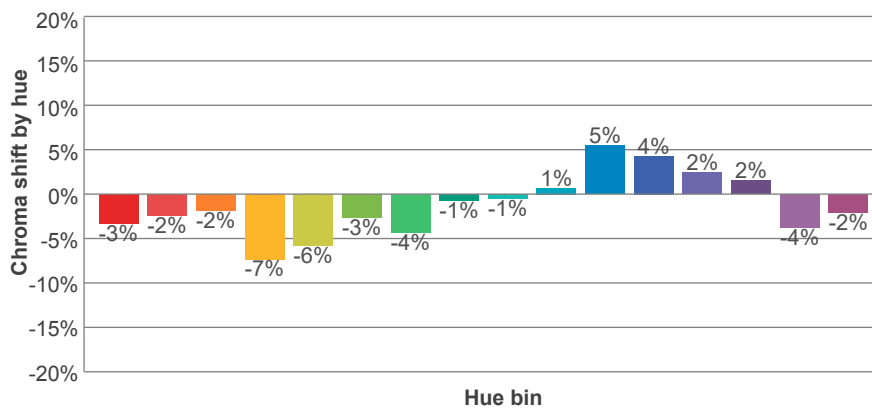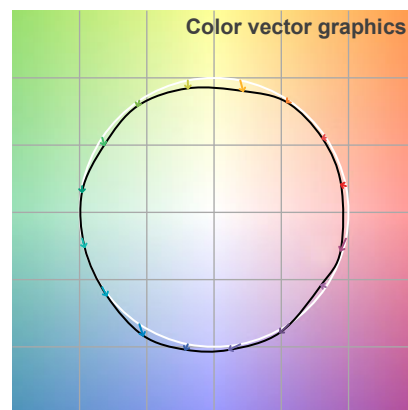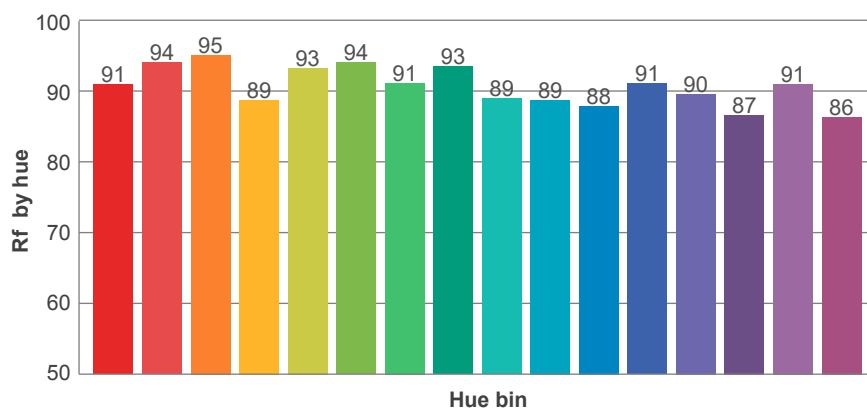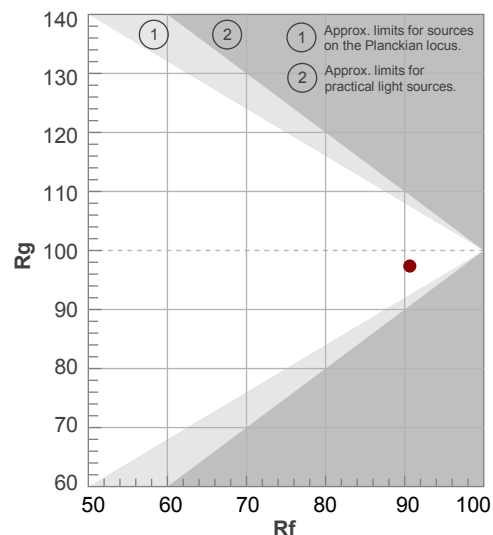

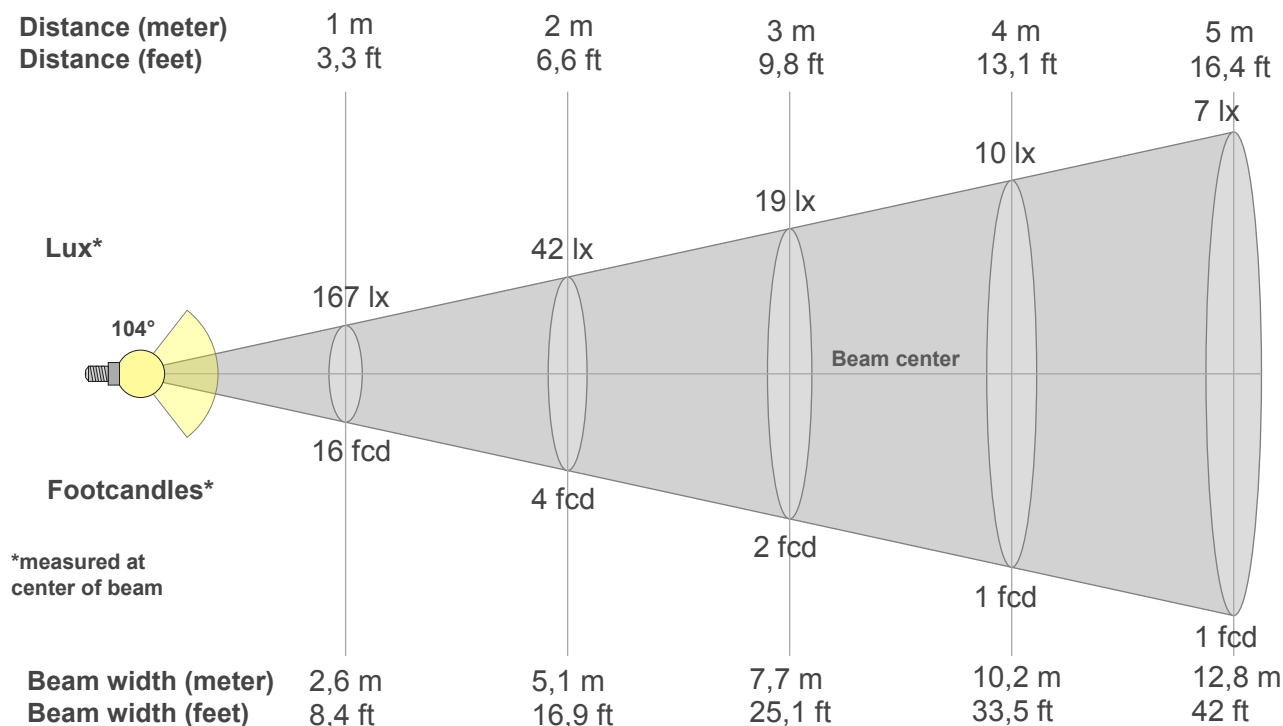

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
167lx	42lx	19lx	10lx	7lx	5lx	3lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx
15,5fcd	3,9fcd	1,7fcd	1fcd	0,6fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd

## Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
167	166	164	160	154	147	139	129	118	107	94	79	64	49	34	20	8	1	0	0
100%	100%	98%	96%	92%	88%	83%	77%	71%	64%	56%	48%	39%	29%	21%	12%	5%	1%	0%	0%

## Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
167	166	164	159	154	146	137	126	112	97	81	65	48	32	17	4	0	0	0	0
100%	100%	98%	95%	92%	88%	82%	75%	67%	58%	49%	39%	29%	19%	10%	3%	0%	0%	0%	0%

## Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
167	166	164	160	154	147	139	129	118	107	94	79	64	49	34	20	8	1	0	0
100%	100%	98%	96%	92%	88%	83%	77%	71%	64%	56%	48%	39%	29%	21%	12%	5%	1%	0%	0%

## Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
167	166	164	159	154	146	137	126	112	97	81	65	48	32	17	4	0	0	0	0
100%	100%	98%	95%	92%	88%	82%	75%	67%	58%	49%	39%	29%	19%	10%	3%	0%	0%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
104°	149,1°	160,5°	85,1%	59,8%

**ISO candela diagram**

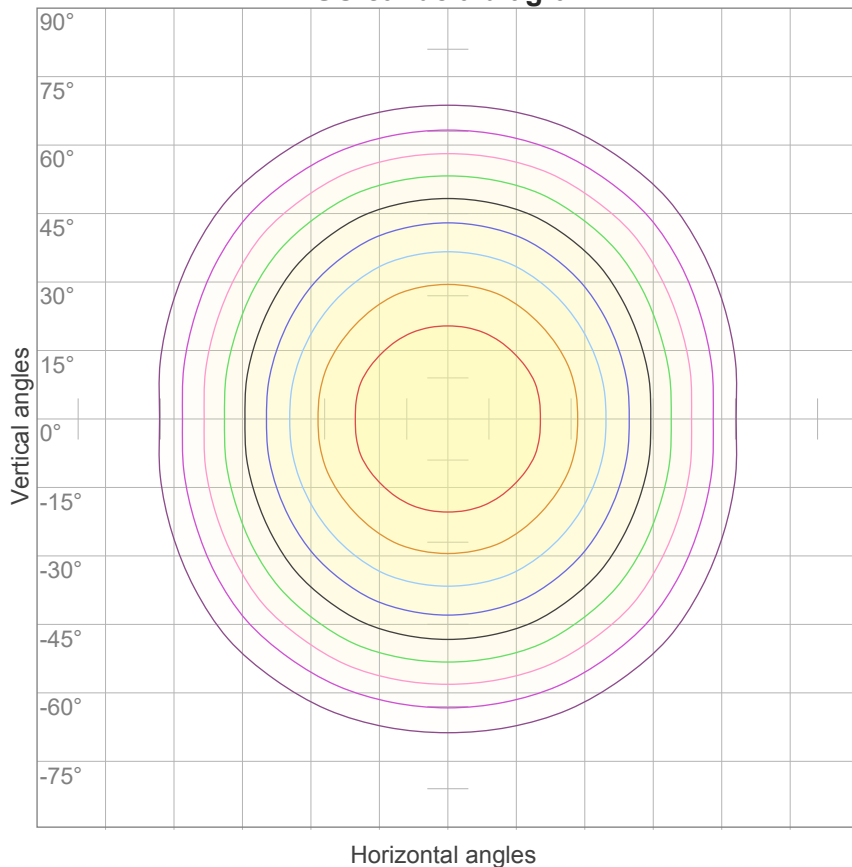


10%	17 cd
20%	33 cd
30%	50 cd
40%	67 cd
50%	83 cd
60%	100 cd
70%	117 cd
80%	134 cd
90%	150 cd

Conditions:

Number of c-planes: 16

Candela at center: 167 cd

**ISO lux diagram**

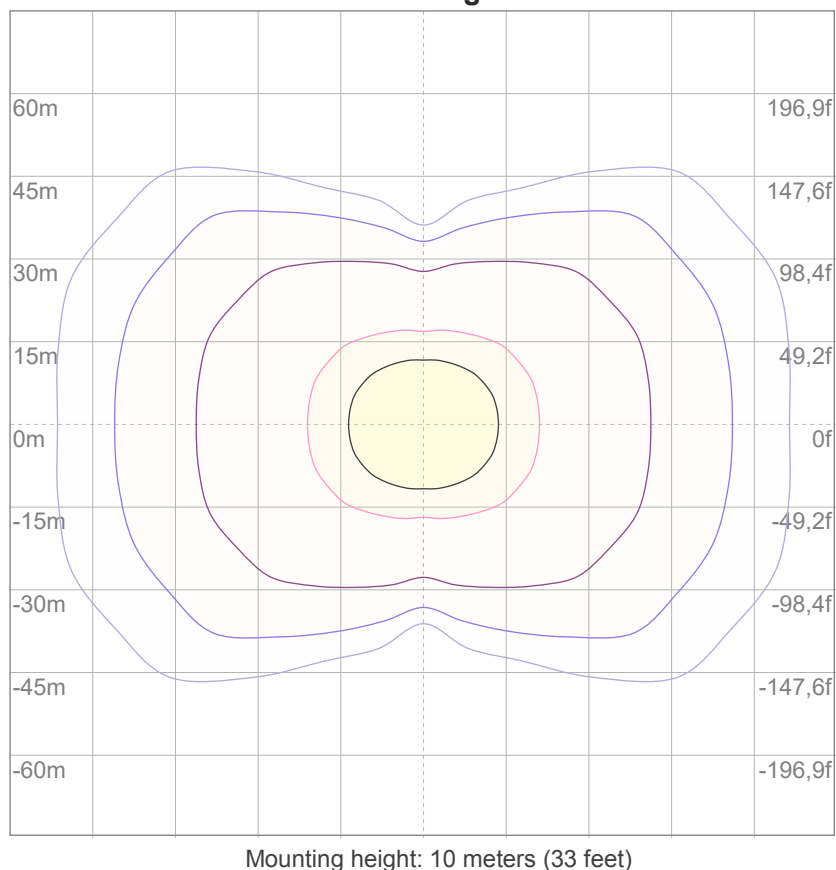

3%	50,1m lx
5%	83,5m lx
10%	0,167 lx
30%	0,501 lx
50%	0,835 lx

Conditions:

Number of c-planes: 16

Lux at center: 1,67 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

### Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19,7	20,8	19,9	21,1	21,3	19,7	20,8	19,9	21,1	21,4
	3H	20,5	21,7	20,9	21,9	22,1	20,2	21,4	20,6	21,7	21,9
	4H	20,7	21,8	21,1	22,1	22,3	20,3	21,4	20,7	21,7	21,9
	6H	20,8	21,8	21,1	22,1	22,4	20,3	21,3	20,6	21,5	21,9
	8H	20,8	21,7	21,1	22,0	22,4	20,2	21,2	20,6	21,5	21,9
	12H	20,7	21,6	21,1	22,0	22,4	20,2	21,1	20,5	21,4	21,9
4H	2H	20,0	21,2	20,4	21,4	21,7	20,1	21,2	20,5	21,5	21,7
	3H	21,1	22,0	21,5	22,4	22,8	20,9	21,8	21,2	22,1	22,6
	4H	21,4	22,2	21,8	22,6	23,1	20,9	21,7	21,3	22,1	22,7
	6H	21,4	22,3	21,9	22,6	23,0	20,8	21,7	21,3	22,0	22,4
	8H	21,4	22,2	21,9	22,5	22,9	20,8	21,5	21,3	21,9	22,3
	12H	21,4	22,0	21,9	22,4	22,9	20,8	21,4	21,2	21,8	22,2
8H	4H	21,4	22,1	21,9	22,5	22,9	21,0	21,7	21,5	22,1	22,4
	6H	21,5	22,1	22,1	22,6	23,1	21,0	21,5	21,5	22,0	22,5
	8H	21,6	22,0	22,1	22,6	23,2	20,9	21,4	21,5	21,9	22,6
	12H	21,5	21,9	22,1	22,4	23,0	20,9	21,3	21,5	21,8	22,4
12H	4H	21,4	22,0	21,9	22,4	22,9	20,9	21,5	21,4	22,0	22,4
	6H	21,5	22,0	22,1	22,5	23,2	21,0	21,4	21,5	21,9	22,6
	8H	21,5	21,9	22,1	22,4	23,0	20,9	21,3	21,5	21,8	22,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,2 / -0,3					0,2 / -0,3				
S = 1.5H		0,5 / -0,8					0,7 / -1,1				
S = 2.0H		1,1 / -1,6					1,6 / -2,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 416 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	99	107	104	100	97	99	96	94	95	93	91	92	90	88	86
2	101	93	87	82	98	91	86	81	88	83	79	85	81	77	82	78	75	73
3	92	82	75	69	90	81	74	68	78	72	67	75	70	66	73	68	65	63
4	85	73	65	59	83	72	64	58	70	63	58	67	62	57	65	60	56	54
5	78	66	57	51	76	65	57	51	63	56	50	61	55	50	59	53	49	47
6	72	59	51	45	70	59	50	45	57	50	44	55	49	44	54	48	43	41
7	67	54	46	40	65	53	45	40	52	45	39	50	44	39	49	43	39	37
8	63	49	41	35	61	49	41	35	47	40	35	46	40	35	45	39	35	33
9	58	45	37	32	57	45	37	32	44	37	32	43	36	32	42	36	31	30
10	55	42	34	29	54	41	34	29	40	34	29	40	33	29	39	33	29	27

LAMPS (number of lamps)


Luminaire budgetary diagram

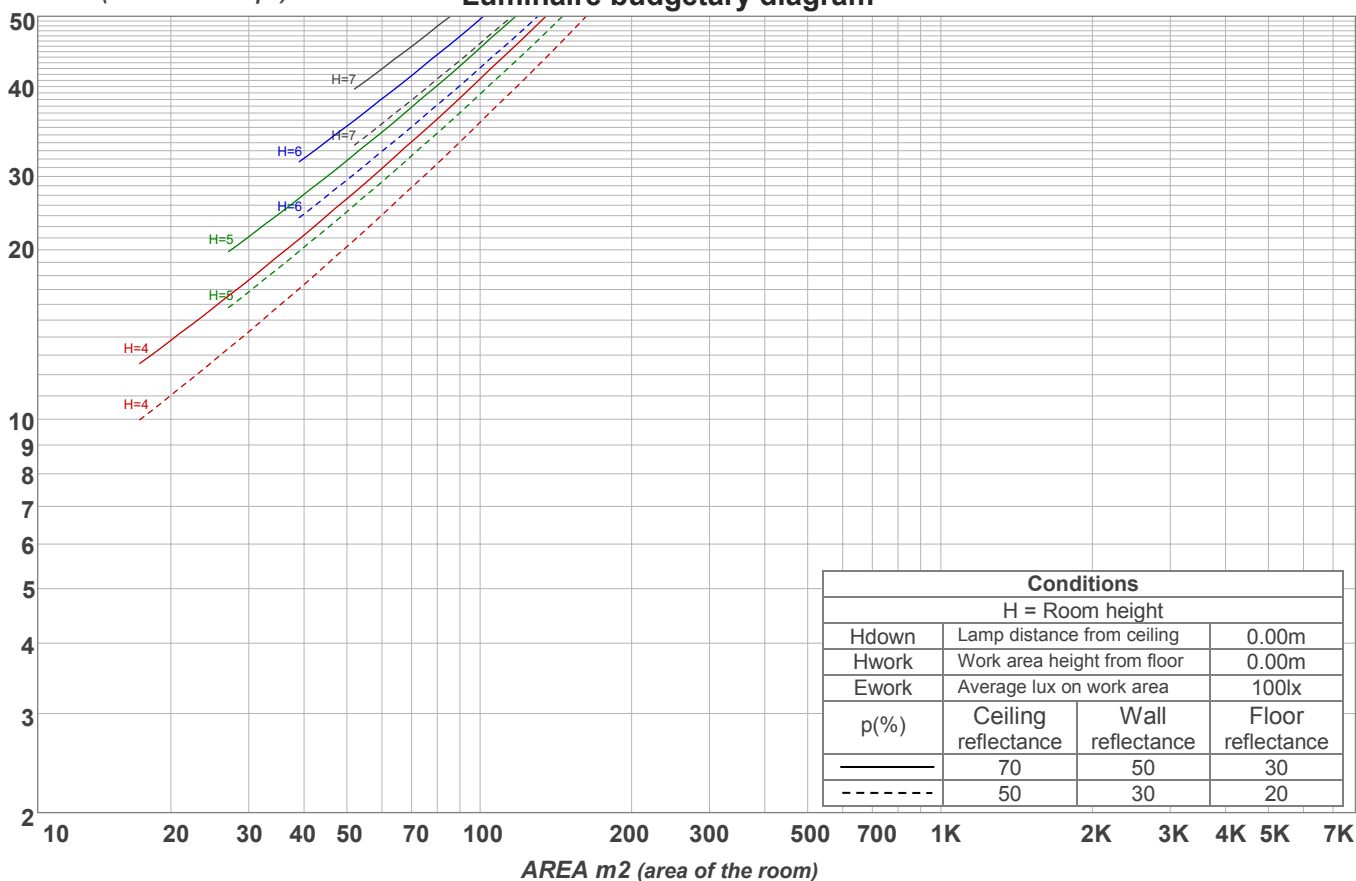

## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
15,8 lm	45,0 lm	67,5 lm	79,8 lm	79,4 lm	66,1 lm	43,0 lm	17,0 lm	1,71 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,081 lm	0,055 lm	0,028 lm	0,021 lm	0,015 lm	0,010 lm	0,007 lm	0,004 lm	0,001 lm

### Warmup curve

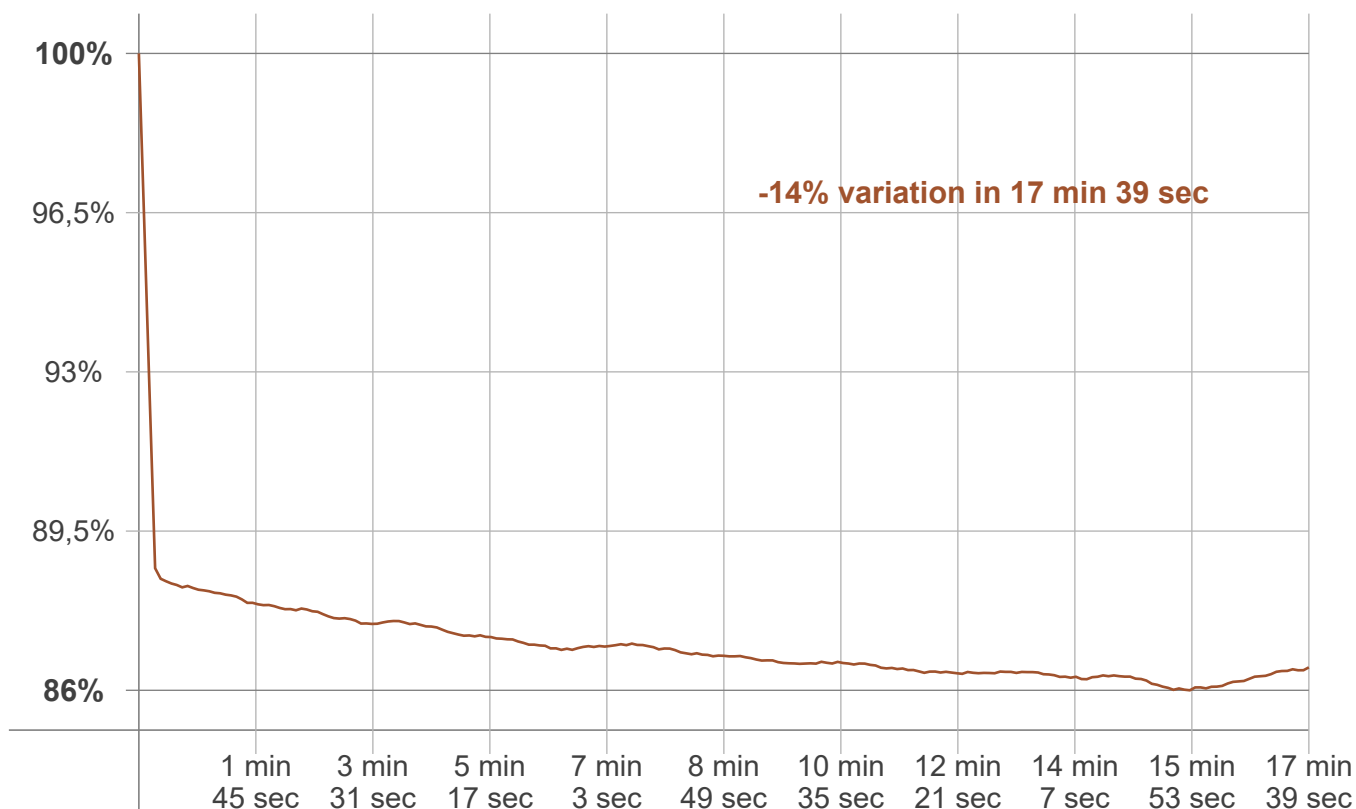

### Warmup result

Warmup time:	Lamp stabilized in 17 min 39 sec
Warmup variation	-14,0%

### Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

### Color temperature change

CCT start	CCT change	CCT end
2545 K	-77 K	2468 K

### Output change

Output start	Output change	Output end
458 lm	-42 lm	416 lm