Light efficiency:

44 Lumen/Watt

Light quality:


CRI: 97,2


Color temperature:

2700 K

Output: 213 lm
Peak: 88,3 cd

Power: 4,8 W
PF: 1,0

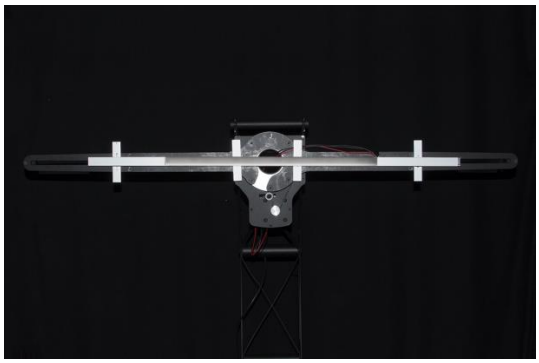

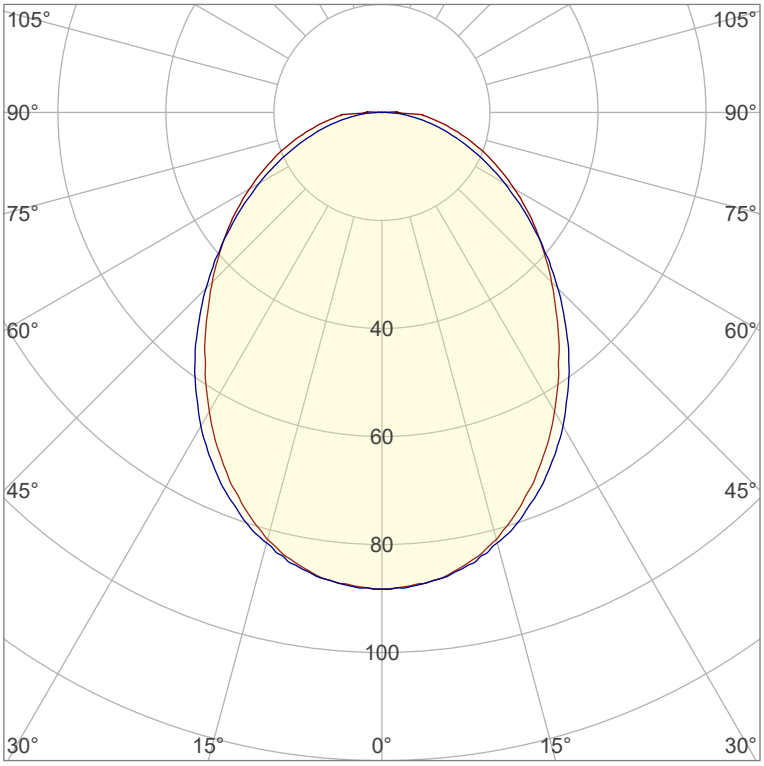

Product name:
Victory-7_510mm_927_Cover-Square-Grey


Item number:
NP/L1C/03F/0510/927/CSG

Date and time:
01.06.2022 16:10:45


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,460
y: 0,411


Spectra

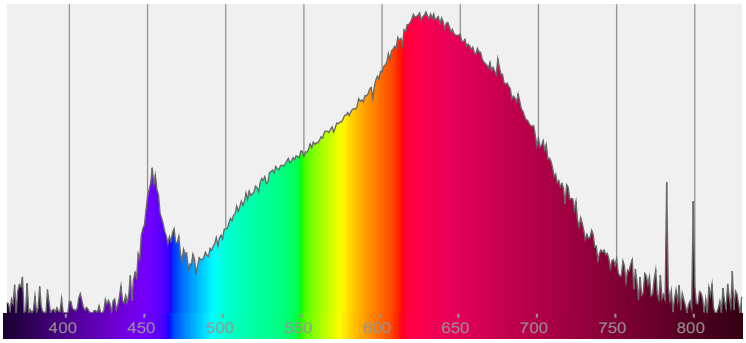


Power

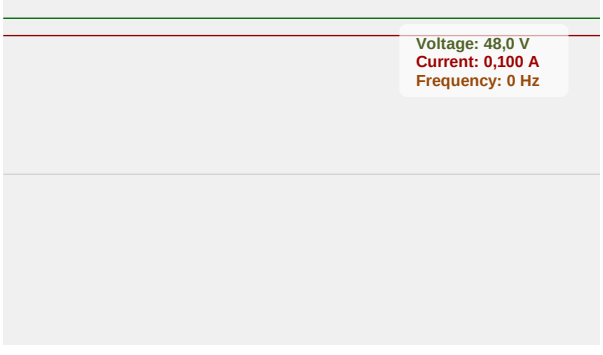

Color details

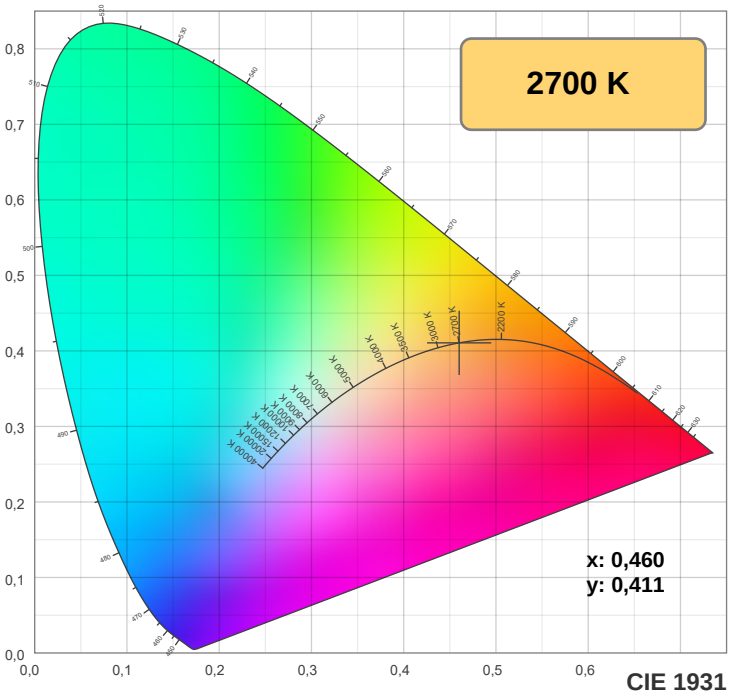


CIE 1931

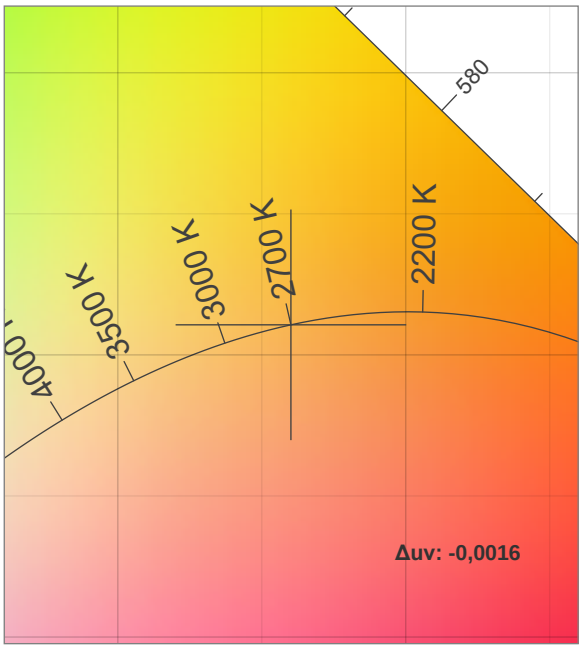


CIE 1931 ZOOM

TM30: 93,9

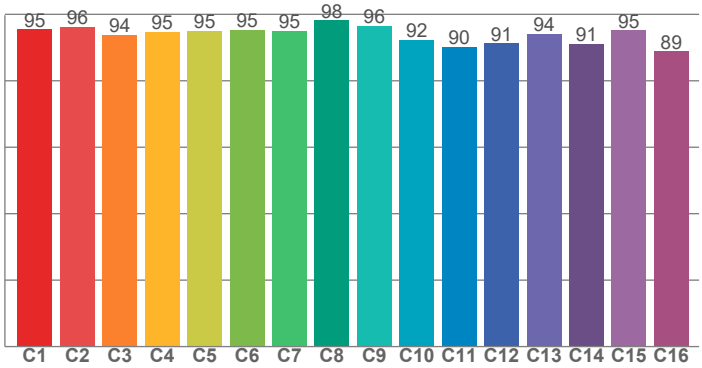

CRI: 97,2 (R1-R8)

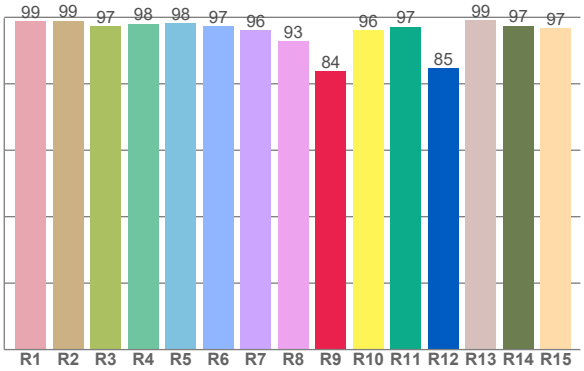

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98,8	98,9	97,2	98,1	98,3	97,3	96,2	92,7	83,8	96,1	97,1	84,7	99,2	97,5	96,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
95,4	96,3	93,9	94,8	95,0	95,2	95,0	98,1	96,4	92,3	90,2	91,2	94,1	91,1	95,2	88,8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,0	96,0	89,5	90,4	94,4	94,0	90,4	92,9	97,0	94,4	94,6	94,7	94,9	93,2	93,1

CQS: 93,1

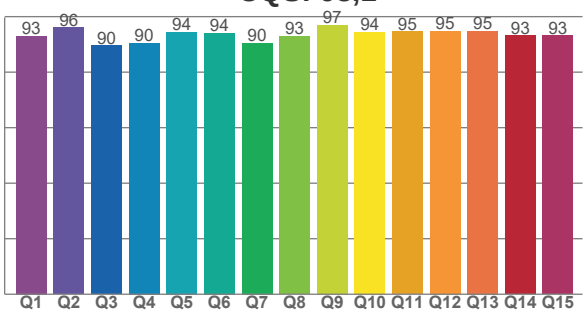

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	97,2	83,8	93,9	101,6	93,1	0,460	0,411	0,263	0,352	-0,0016

TM30 details


Rf 93,9


Fidelity index Rf


Rg 101,6


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	95	-2%	0%
2	96	-1%	1%
3	94	0%	3%
4	95	-2%	1%
5	95	0%	2%
6	95	3%	1%
7	95	1%	-1%
8	98	1%	-1%
9	96	0%	2%
10	92	0%	5%
11	90	2%	7%
12	91	5%	1%
13	94	3%	-3%
14	91	5%	-5%
15	95	-1%	-2%
16	89	1%	-9%

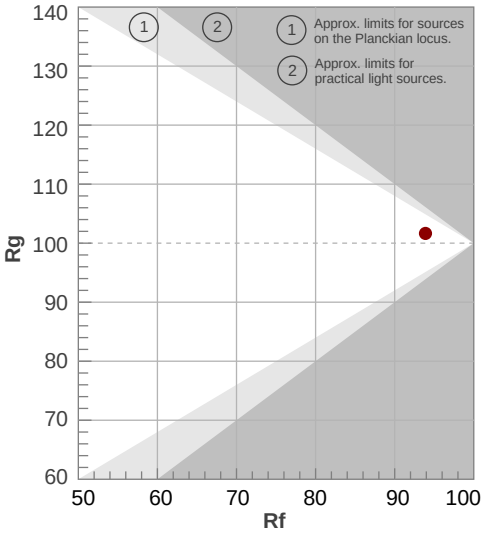


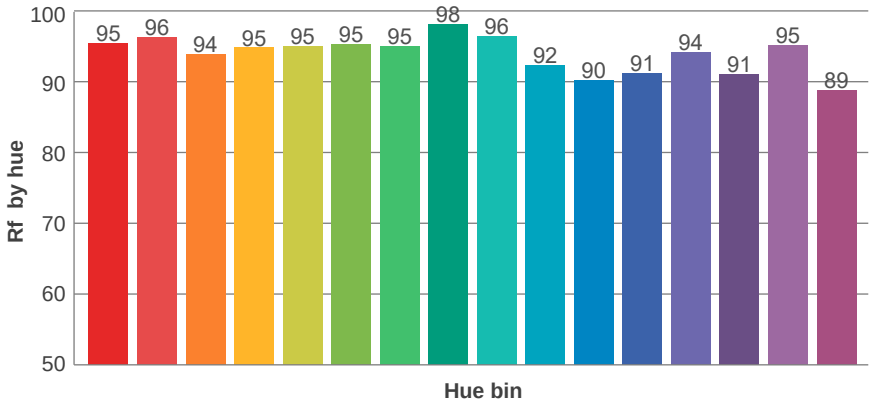

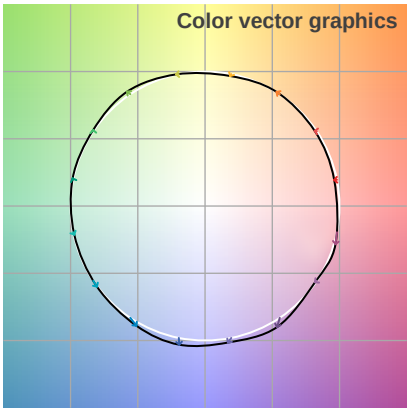


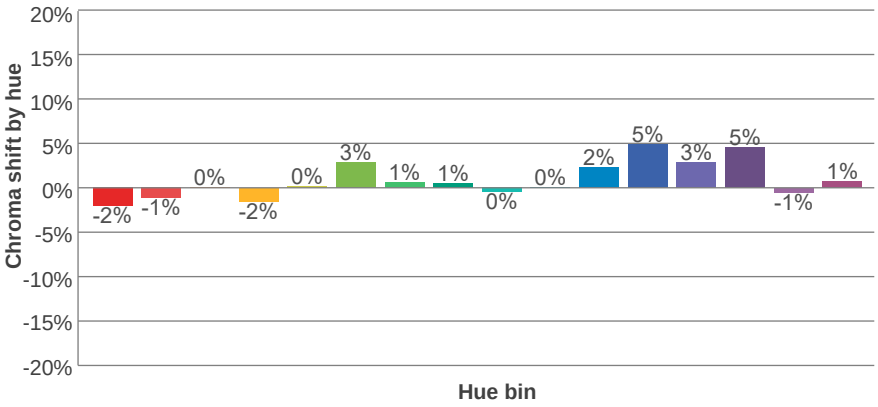

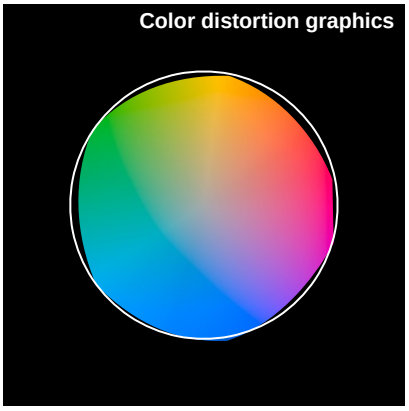

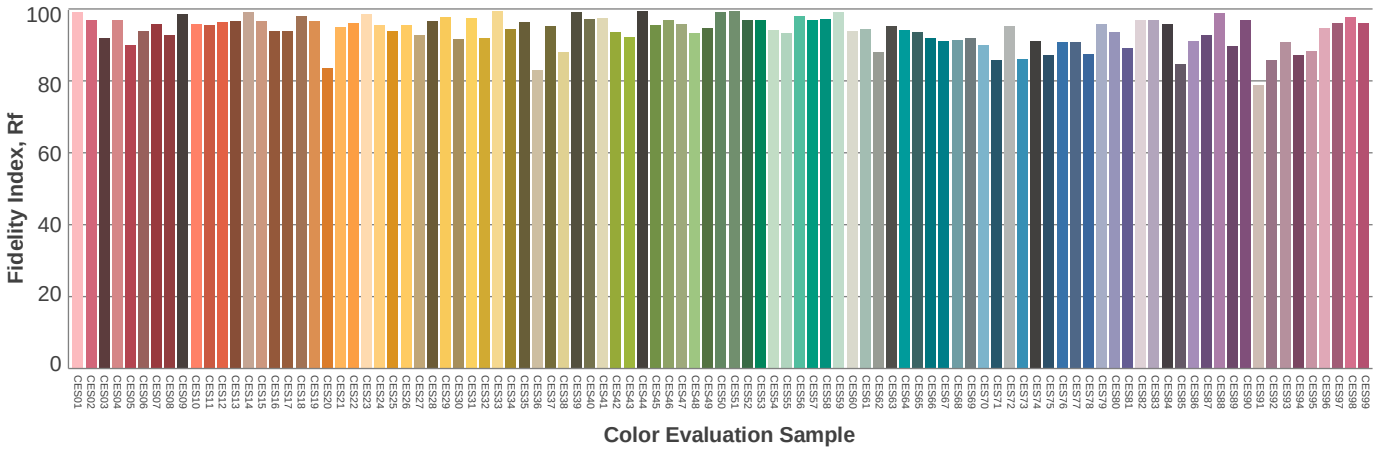

Beam details

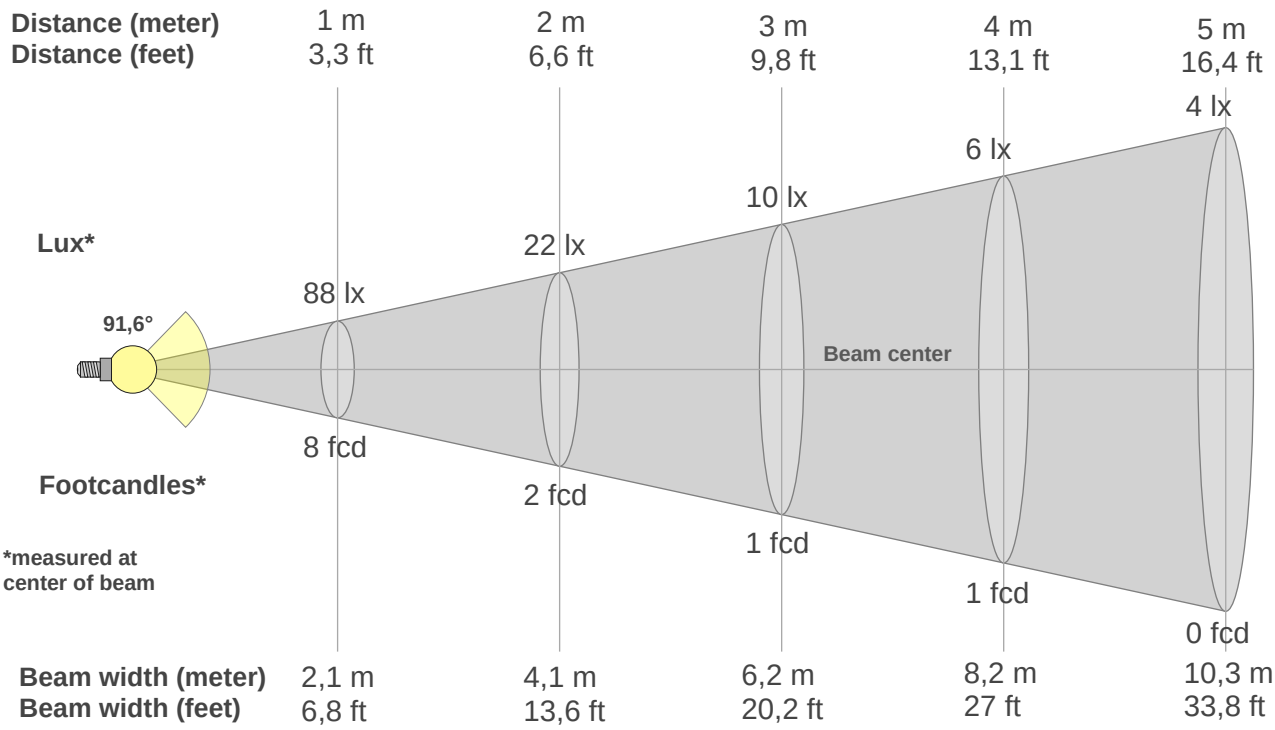

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
88lx	22lx	10lx	6lx	4lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
8,2fcd	2fcd	0,9fcd	0,5fcd	0,3fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
88,2	87,5	85,4	81,8	76,5	70,5	63,9	57,0	50,6	44,4	38,7	33,5	28,3	23,5	19,0	14,9	11,2	8,2	3,0	0,0
100%	99%	97%	93%	87%	80%	72%	65%	57%	50%	44%	38%	32%	27%	22%	17%	13%	9%	3%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
88,2	87,6	85,8	82,5	78,3	73,1	67,0	60,3	53,2	46,1	39,0	32,4	26,3	20,7	15,6	11,1	7,1	3,8	0,8	0,0
100%	99%	97%	94%	89%	83%	76%	68%	60%	52%	44%	37%	30%	23%	18%	13%	8%	4%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
88,2	87,5	85,4	81,8	76,5	70,5	63,9	57,0	50,6	44,4	38,7	33,5	28,3	23,5	19,0	14,9	11,2	8,2	3,0	0,0
100%	99%	97%	93%	87%	80%	72%	65%	57%	50%	44%	38%	32%	27%	22%	17%	13%	9%	3%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
88,2	87,6	85,8	82,5	78,3	73,1	67,0	60,3	53,2	46,1	39,0	32,4	26,3	20,7	15,6	11,1	7,1	3,8	0,8	0,0
100%	99%	97%	94%	89%	83%	76%	68%	60%	52%	44%	37%	30%	23%	18%	13%	8%	4%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
91,6°	**162,1°**	**206,3°**	**77,8%**	**56,0%**

ISO candela diagram

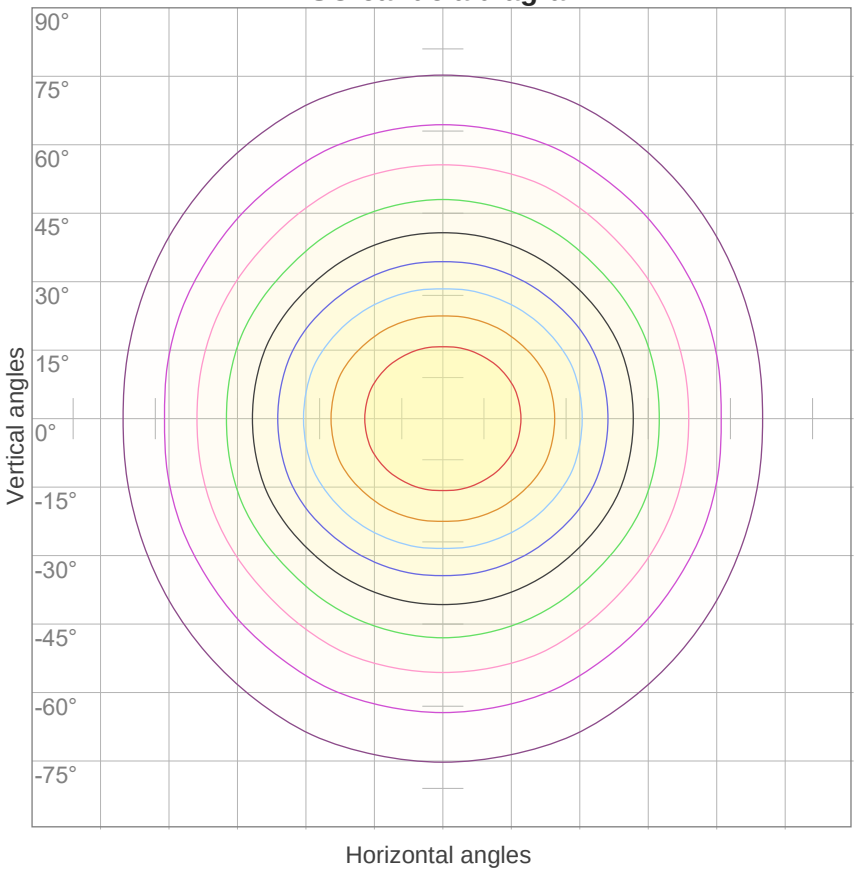


10%	9 cd
20%	18 cd
30%	26 cd
40%	35 cd
50%	44 cd
60%	53 cd
70%	62 cd
80%	71 cd
90%	79 cd

Conditions:

Number of c-planes: 16

Candela at center: 88 cd

ISO lux diagram

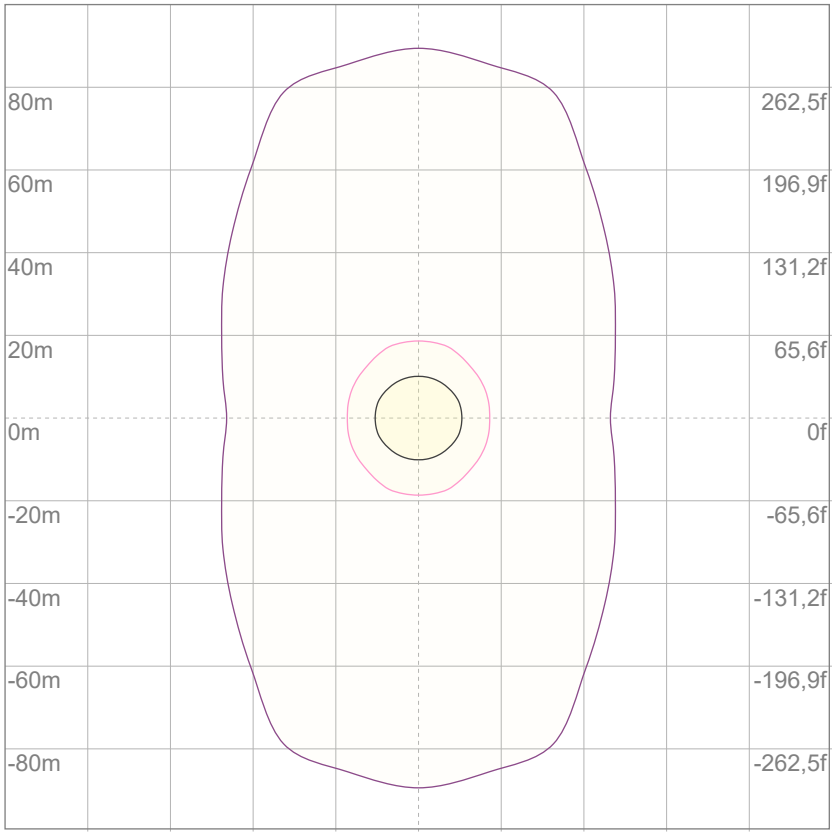

Mounting height: 10 meters (33 feet)

3%	26,5m lx
5%	44,1m lx
10%	88,2m lx
30%	0,265 lx
50%	0,441 lx

Conditions:

Number of c-planes: 16

Lux at center: 0,882 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	16,2	17,4	16,5	17,7	17,9	17,1	18,2	17,3	18,6	18,8
	3H	17,4	18,7	17,8	18,9	19,1	18,3	19,5	18,7	19,8	20,0
	4H	18,0	19,2	18,4	19,4	19,7	18,8	20,0	19,2	20,3	20,5
	6H	18,5	19,5	18,8	19,8	20,2	19,3	20,4	19,7	20,7	21,0
	8H	18,7	19,7	19,0	20,0	20,4	19,5	20,5	19,8	20,8	21,2
	12H	18,8	19,8	19,2	20,1	20,6	19,6	20,6	20,0	20,9	21,4
4H	2H	16,7	17,9	17,1	18,2	18,4	17,4	18,6	17,8	18,9	19,1
	3H	18,3	19,2	18,6	19,6	20,0	18,9	19,9	19,3	20,3	20,7
	4H	18,9	19,8	19,3	20,2	20,7	19,5	20,4	20,0	20,9	21,4
	6H	19,5	20,3	20,0	20,7	21,1	20,1	21,0	20,6	21,3	21,7
	8H	19,7	20,5	20,2	20,9	21,3	20,3	21,1	20,8	21,5	21,8
	12H	19,9	20,6	20,4	21,0	21,5	20,5	21,1	21,0	21,5	22,0
8H	4H	19,1	19,9	19,6	20,3	20,7	19,7	20,5	20,2	20,9	21,3
	6H	19,9	20,5	20,4	21,0	21,5	20,4	21,0	20,9	21,5	22,0
	8H	20,3	20,8	20,8	21,3	22,0	20,7	21,3	21,2	21,8	22,4
	12H	20,6	21,1	21,2	21,6	22,2	21,0	21,4	21,6	21,9	22,5
12H	4H	19,2	19,8	19,6	20,2	20,7	19,7	20,4	20,2	20,8	21,3
	6H	20,0	20,5	20,5	21,0	21,7	20,5	21,0	21,0	21,6	22,2
	8H	20,4	20,8	21,0	21,3	22,0	20,8	21,3	21,4	21,8	22,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,3					0,3 / -0,4				
S = 2.0H		0,4 / -0,6					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 213 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	115	115	115	115	110	110	110	105	105	105	100	100	100	98
1	108	103	99	95	105	101	97	93	96	93	90	92	89	87	88	86	84	82
2	99	90	84	78	96	88	82	77	84	79	75	81	77	73	78	74	71	69
3	90	80	72	66	88	78	71	65	75	69	63	72	66	62	69	64	61	58
4	83	71	63	56	80	70	62	56	67	60	55	64	58	54	62	57	53	50
5	77	64	55	49	74	63	54	48	60	53	48	58	52	47	56	51	46	44
6	71	58	49	43	69	57	49	43	55	47	42	53	46	41	51	45	41	39
7	66	53	44	38	64	52	44	38	50	43	37	48	42	37	47	41	37	35
8	61	48	40	34	60	47	40	34	46	39	34	45	38	33	43	37	33	31
9	58	44	36	31	56	44	36	31	42	35	31	41	35	30	40	34	30	28
10	54	41	33	28	53	41	33	28	39	33	28	38	32	28	37	32	27	26

Luminaire budgetary diagram

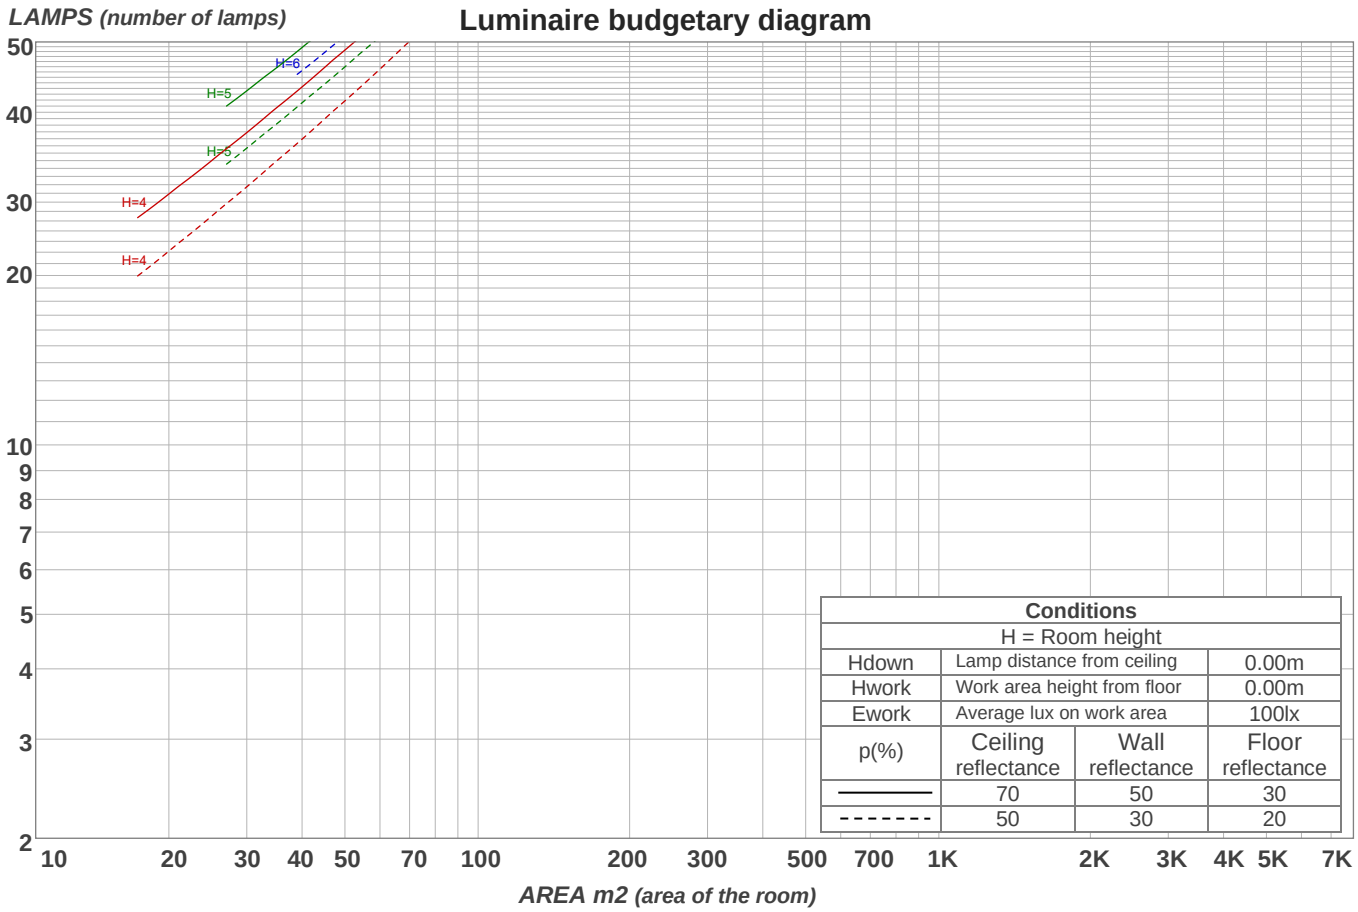


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
8,29 lm	23,1 lm	33,1 lm	36,8 lm	34,9 lm	29,4 lm	22,0 lm	14,0 lm	6,42 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2,27 lm	0,532 lm	0,499 lm	0,451 lm	0,390 lm	0,316 lm	0,233 lm	0,143 lm	0,048 lm

Warmup curve

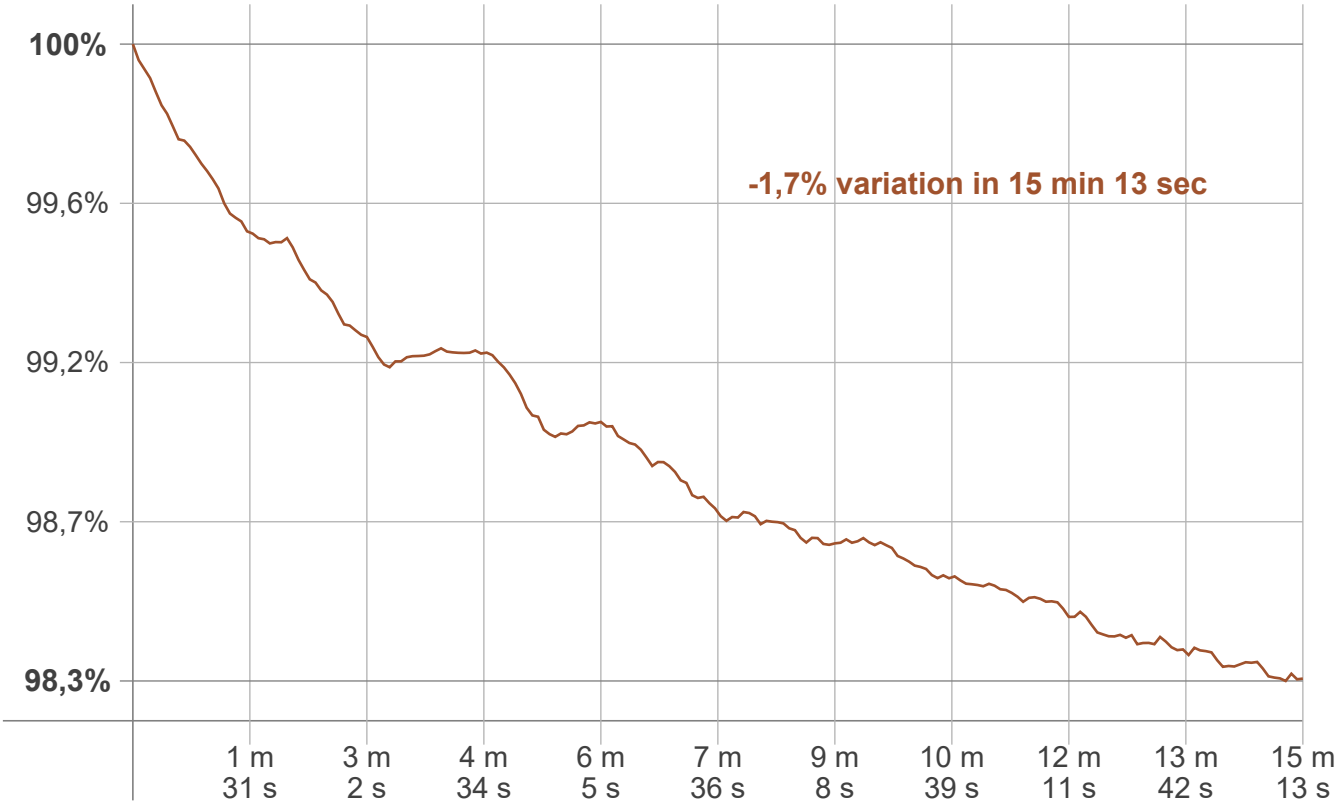

Warmup result

Warmup time:	**Lamp stabilized in 15 min 13 sec**
Warmup variation	**-1,7%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2707 K	-7 K	2700 K

Output change

Output start	Output change	Output end
217 lm	-4 lm	213 lm