

Light efficiency:

66 Lumen/Watt

Light quality:

CRI: 95,7

Color temperature:



2688 K

Output: 301 lm

Peak: 83,8 cd


Power: 4,6 W

PF: 1,0

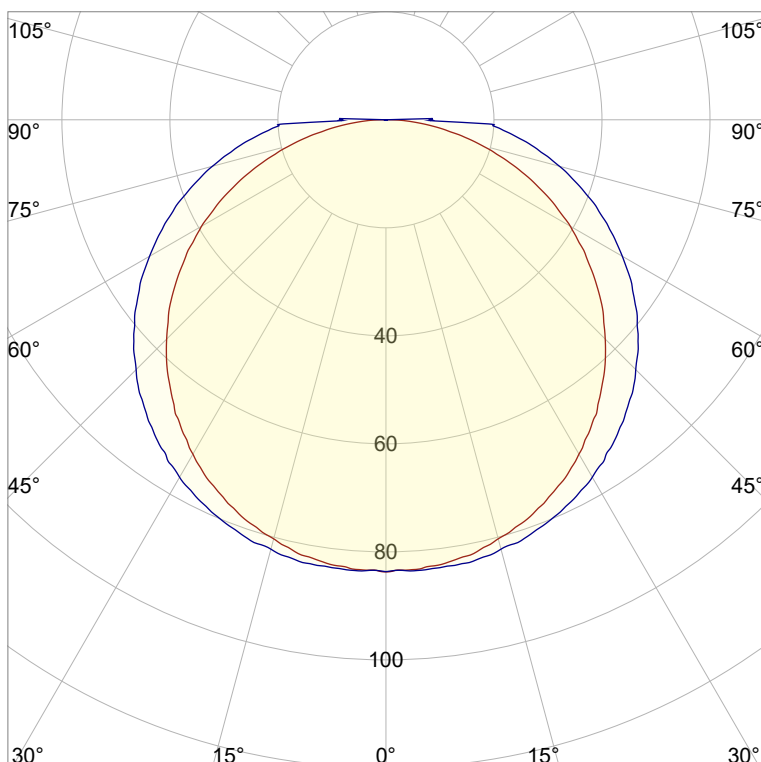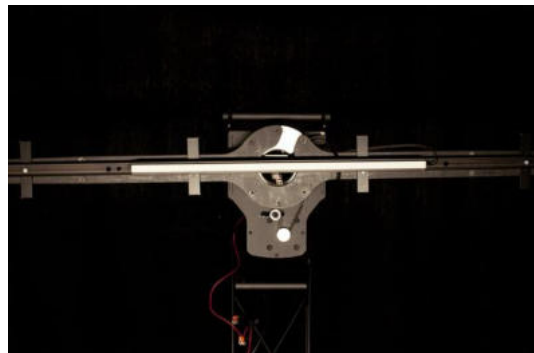

CIE 1931
x: 0,460
y: 0,409

Spectra

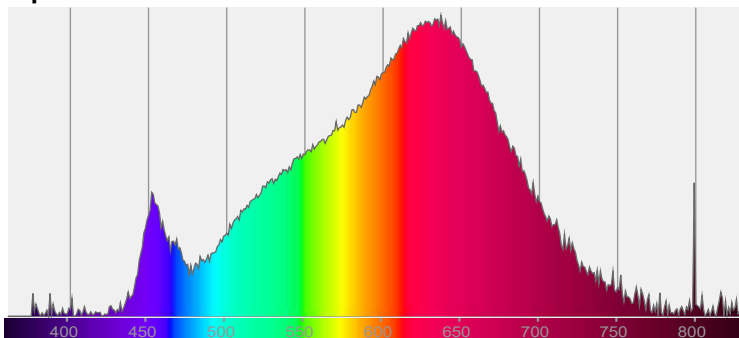

Power

Voltage: 24,1 V
Current: 0,190 A
Frequency: 0 Hz

Product name:

Horizon_510mm_927_Cover-Square-White

Item number:

NNP/L/01A/0510//927/CSW

Date and time:

19.09.2019 11:36:40

Description:

Rank: G08DW

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 K

CRI +/-0,7

Angular Resolution 1 Grad Step

Last Calibration 07.10.2025

Pruefer:



Peter Ulrich

Pruefort:


Lichtlabor

Gaustrasse13


55411 Bingen am Rhein

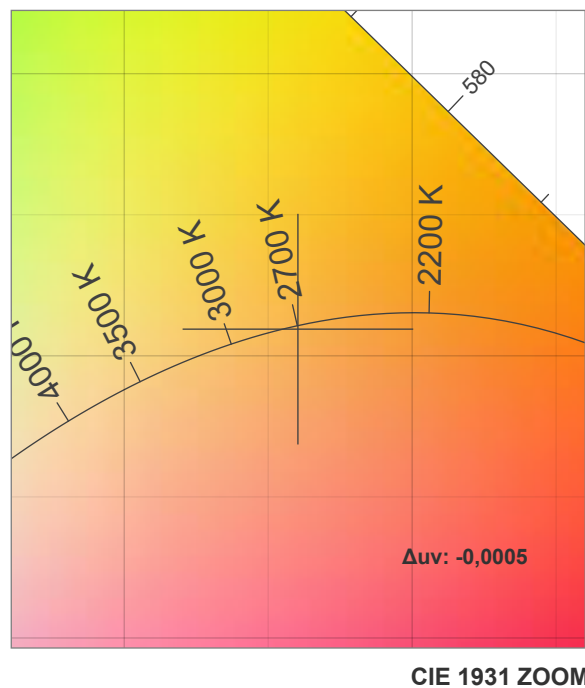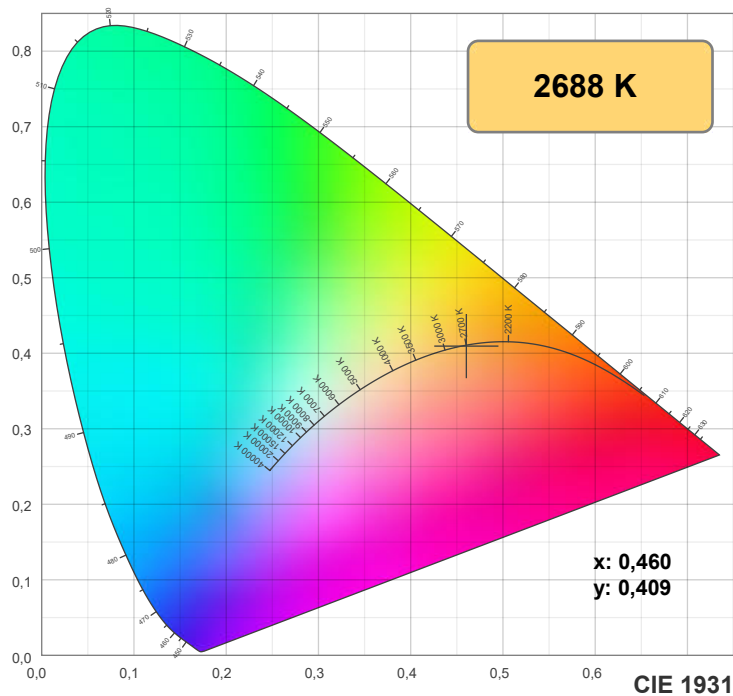

TM30: 93,2

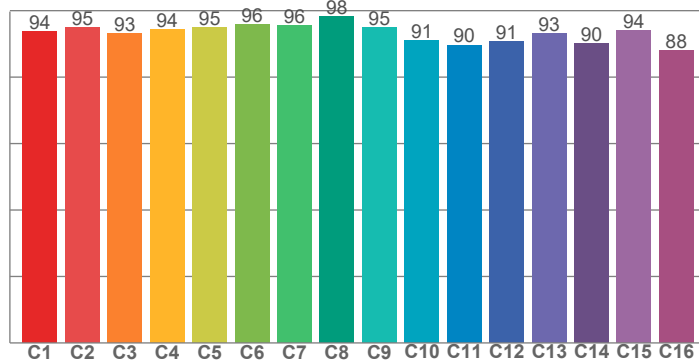

CRI: 95,7 (R1-R8)

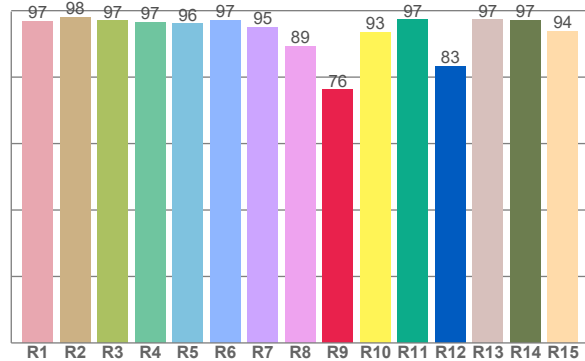

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,7	98,0	96,9	96,6	96,0	97,1	95,0	89,3	76,1	93,5	97,2	83,2	97,2	97,2	93,9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93,7	95,0	93,1	94,4	94,9	95,7	95,6	98,4	95,1	91,0	89,7	90,7	93,2	90,2	94,0	88,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91,3	95,3	89,4	89,4	92,8	93,7	91,5	93,1	96,9	94,3	94,3	94,5	94,6	91,3	91,2

CQS: 92,5

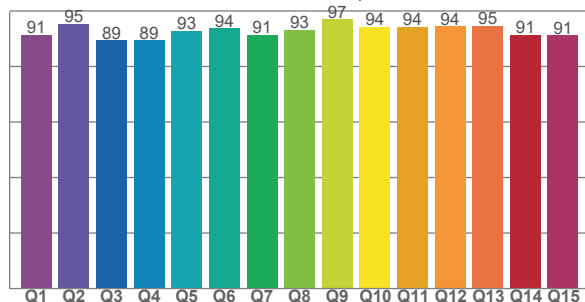

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2688 K	95,7	76,1	93,2	100,3	92,5	0,460	0,409	0,263	0,351	-0,0005







Rf 93,2


Fidelity index Rf

Rg 100,3

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	-3%	0%
2	95	-2%	1%
3	93	-1%	3%
4	94	-2%	1%
5	95	-1%	2%
6	96	2%	1%
7	96	0%	-1%
8	98	0%	0%
9	95	-1%	3%
10	91	0%	6%
11	90	2%	7%
12	91	5%	1%
13	93	3%	-4%
14	90	4%	-7%
15	94	-1%	-2%
16	88	-1%	-9%

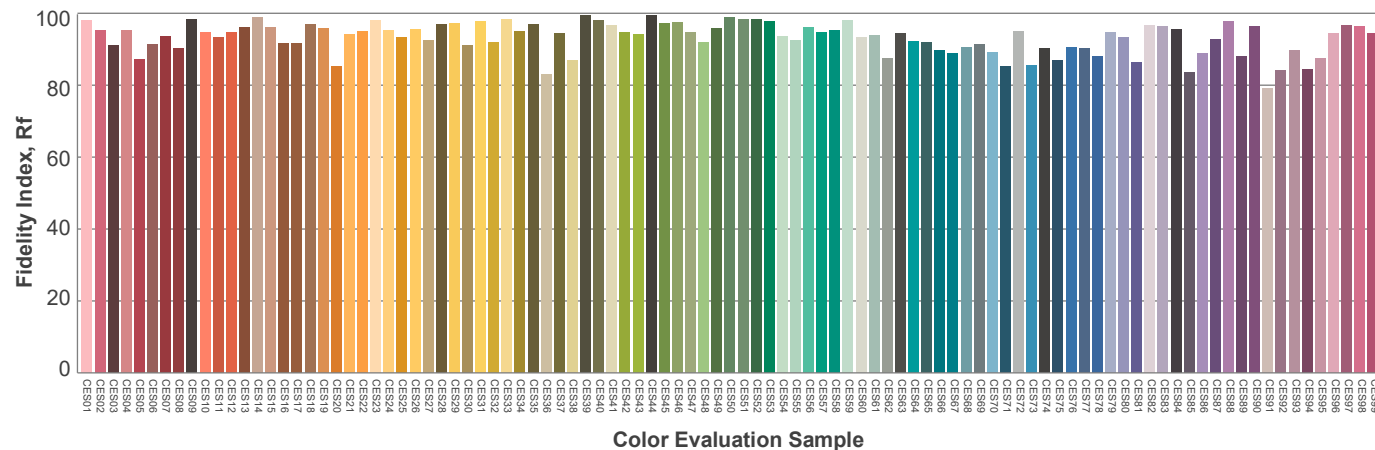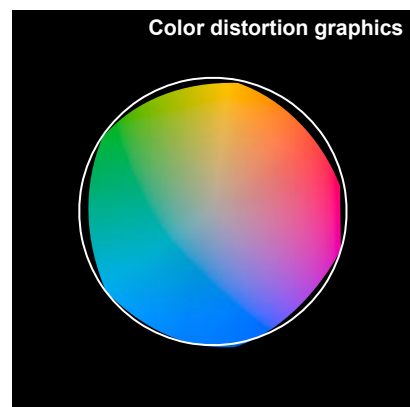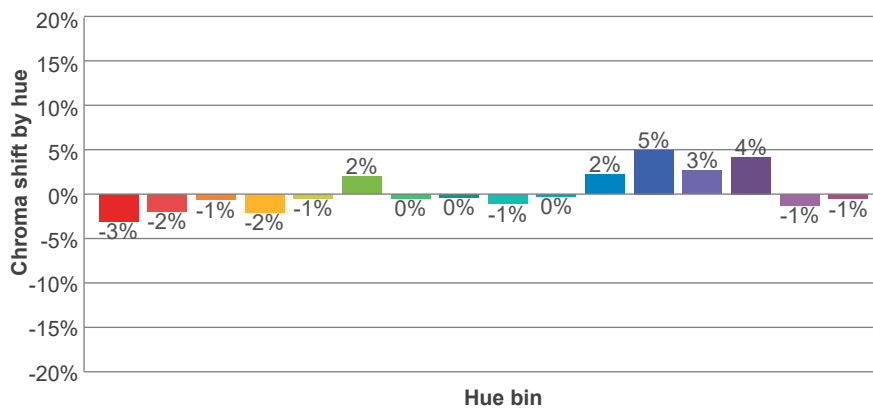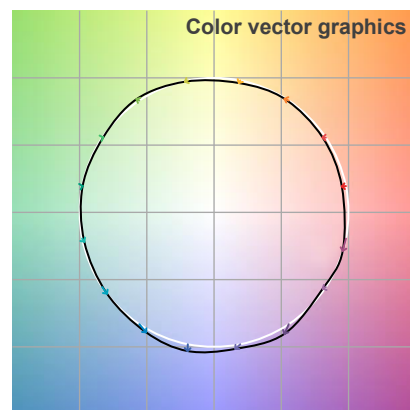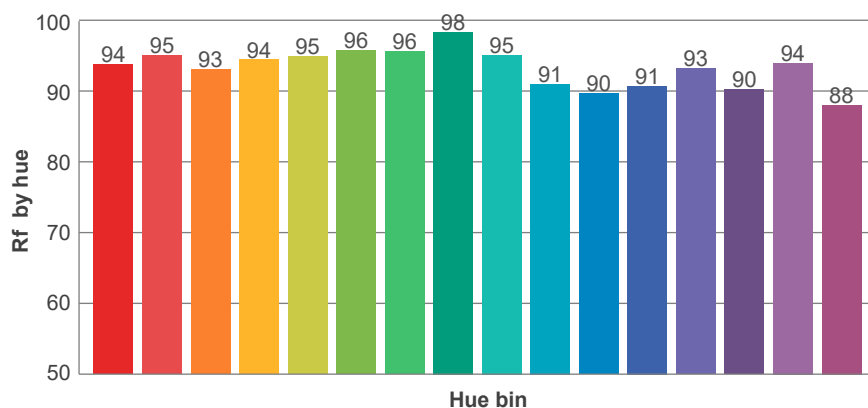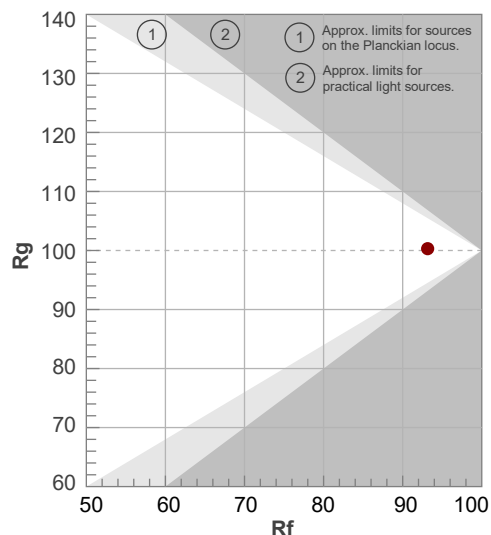

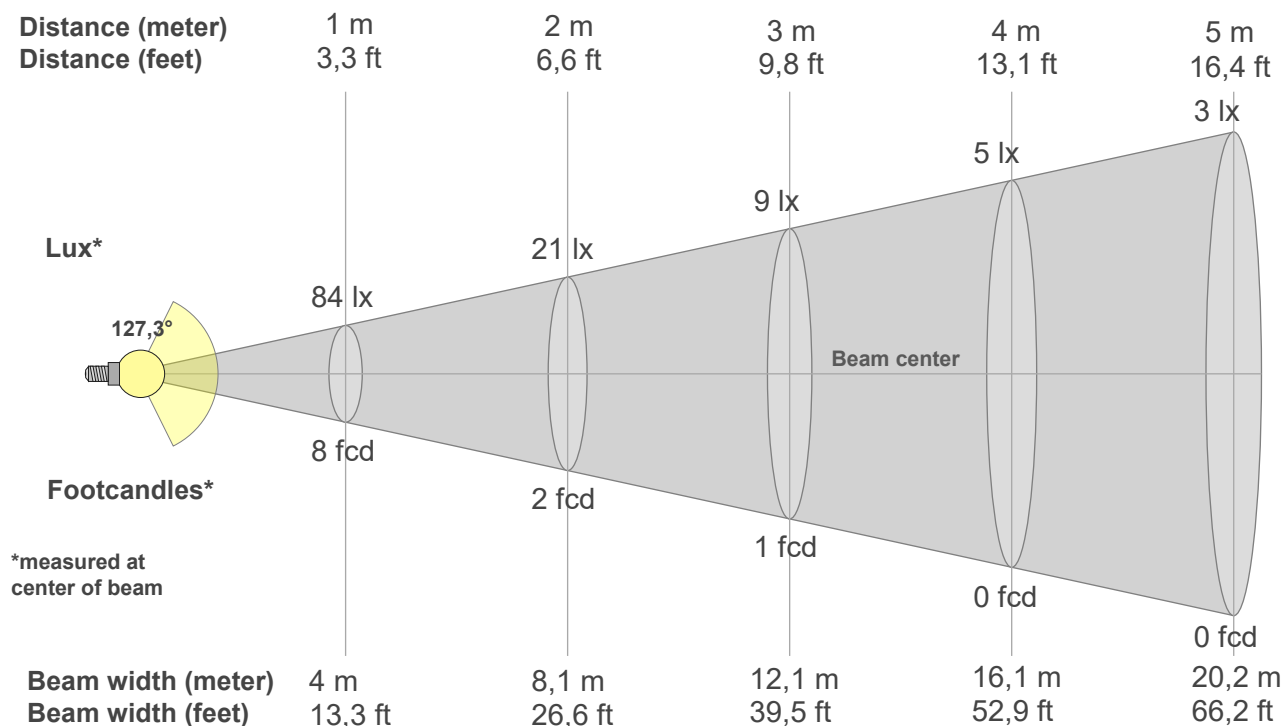

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
84lx	21lx	9lx	5lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
7,8fcd	1,9fcd	0,9fcd	0,5fcd	0,3fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
83,7	83,2	82,2	80,3	78,1	75,1	71,5	67,3	62,6	57,4	51,9	45,7	39,4	32,6	25,6	18,4	11,5	5,5	0,6	0,0
100%	99%	98%	96%	93%	90%	85%	80%	75%	69%	62%	55%	47%	39%	31%	22%	14%	7%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
83,7	83,6	83,4	82,3	81,0	78,9	76,4	73,2	69,6	65,4	60,9	55,9	50,5	45,0	39,1	33,3	27,4	21,7	8,4	0,0
100%	100%	100%	98%	97%	94%	91%	88%	83%	78%	73%	67%	60%	54%	47%	40%	33%	26%	10%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
83,7	83,2	82,2	80,3	78,1	75,1	71,5	67,3	62,6	57,4	51,9	45,7	39,4	32,6	25,6	18,4	11,5	5,5	0,6	0,0
100%	99%	98%	96%	93%	90%	85%	80%	75%	69%	62%	55%	47%	39%	31%	22%	14%	7%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
83,7	83,6	83,4	82,3	81,0	78,9	76,4	73,2	69,6	65,4	60,9	55,9	50,5	45,0	39,1	33,3	27,4	21,7	8,4	0,0
100%	100%	100%	98%	97%	94%	91%	88%	83%	78%	73%	67%	60%	54%	47%	40%	33%	26%	10%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
127,3°	178,6°	214,3°	68,2%	44,8%

ISO candela diagram

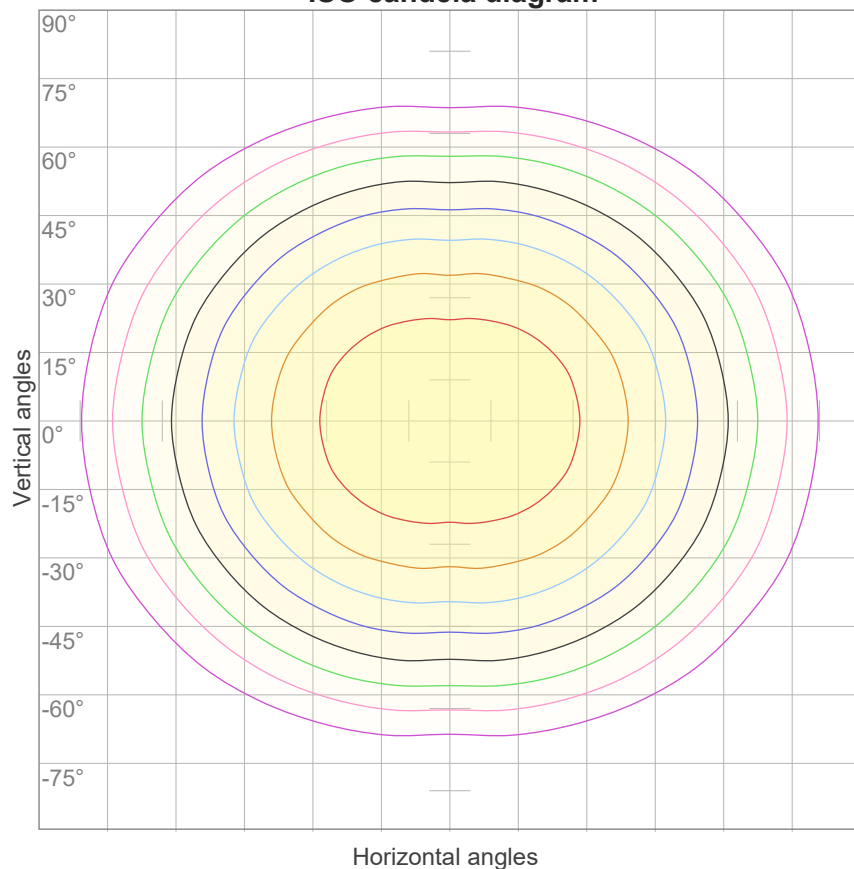


10%	8 cd
20%	17 cd
30%	25 cd
40%	33 cd
50%	42 cd
60%	50 cd
70%	59 cd
80%	67 cd
90%	75 cd

Conditions:

Number of c-planes: 16

Candela at center: 84 cd

ISO lux diagram

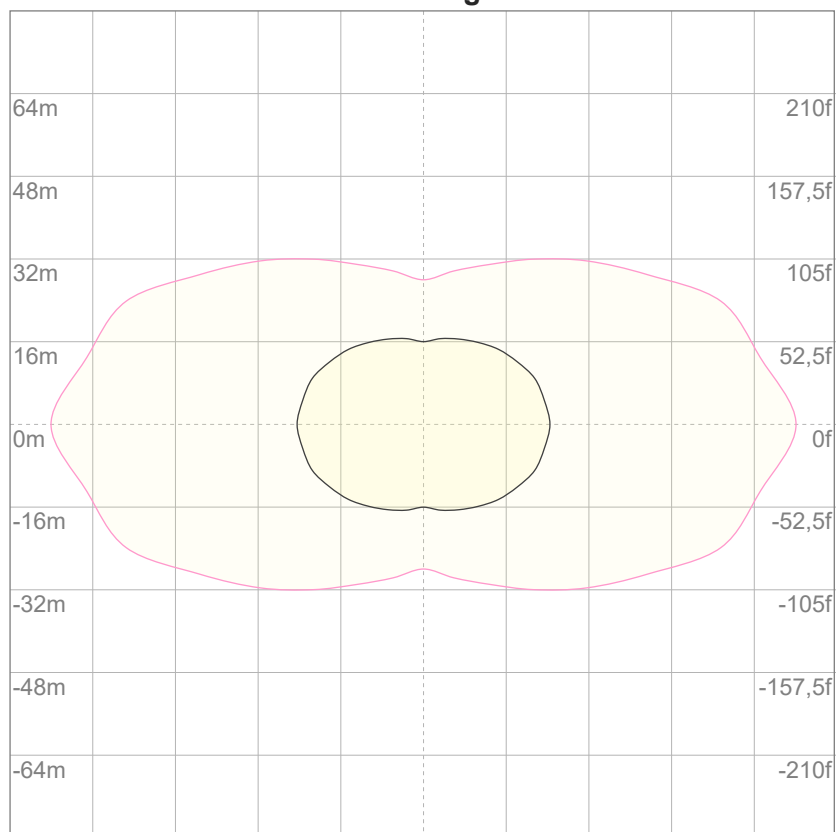

Mounting height: 10 meters (33 feet)

3%	25,1m lx
5%	41,8m lx
10%	83,7m lx
30%	0,251 lx
50%	0,418 lx

Conditions:

Number of c-planes: 16

Lux at center: 0,837 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	19,8	21,2	20,1	21,5	21,7	21,7	23,0	22,0	23,4	23,6
	3H	21,1	22,5	21,5	22,8	23,0	23,9	25,2	24,3	25,5	25,7
	4H	21,6	23,0	22,0	23,2	23,5	25,0	26,3	25,4	26,6	26,9
	6H	22,0	23,2	22,4	23,5	23,9	26,2	27,4	26,6	27,7	28,1
	8H	22,1	23,3	22,5	23,6	24,0	26,8	28,0	27,2	28,3	28,7
	12H	22,1	23,2	22,5	23,6	24,0	27,5	28,6	27,8	28,9	29,4
4H	2H	20,7	22,0	21,1	22,3	22,6	22,2	23,5	22,6	23,8	24,0
	3H	22,4	23,5	22,7	23,8	24,3	24,6	25,7	25,0	26,1	26,5
	4H	22,9	24,0	23,4	24,4	24,9	25,8	26,9	26,3	27,3	27,8
	6H	23,4	24,4	23,9	24,7	25,1	27,2	28,1	27,7	28,5	28,9
	8H	23,5	24,4	24,0	24,8	25,2	27,8	28,7	28,4	29,1	29,5
	12H	23,6	24,4	24,1	24,8	25,3	28,6	29,4	29,1	29,8	30,3
8H	4H	23,5	24,4	24,0	24,8	25,2	26,1	26,9	26,6	27,3	27,7
	6H	24,2	24,9	24,7	25,4	25,9	27,6	28,3	28,1	28,7	29,3
	8H	24,5	25,1	25,0	25,6	26,3	28,4	29,0	28,9	29,6	30,2
	12H	24,6	25,2	25,2	25,7	26,3	29,3	29,9	29,9	30,4	31,0
12H	4H	23,7	24,4	24,2	24,9	25,4	26,0	26,8	26,5	27,2	27,7
	6H	24,5	25,1	25,0	25,6	26,3	27,6	28,3	28,1	28,8	29,4
	8H	24,8	25,3	25,4	25,8	26,4	28,5	29,0	29,1	29,5	30,2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,1					0,1 / -0,1				
S = 1.5H		0,2 / -0,3					0,1 / -0,1				
S = 2.0H		0,4 / -0,6					0,3 / -0,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 301 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	96
1	106	100	95	91	103	97	93	89	92	89	85	88	85	82	84	81	79	76
2	95	86	78	72	92	84	77	71	80	74	68	76	71	66	72	68	64	62
3	86	75	66	59	83	73	65	58	69	62	56	66	60	55	63	58	53	51
4	79	66	56	49	76	64	55	49	61	54	47	58	52	46	56	50	45	43
5	72	59	49	42	70	57	48	41	55	47	41	52	45	40	50	44	39	37
6	66	52	43	36	64	51	42	36	49	41	35	47	40	35	45	39	34	32
7	62	47	38	32	60	46	38	32	44	37	31	43	36	31	41	35	30	28
8	57	43	34	28	55	42	34	28	41	33	28	39	32	27	38	31	27	25
9	53	39	31	25	52	39	31	25	37	30	25	36	29	24	35	29	24	22
10	50	36	28	23	48	36	28	23	34	27	22	33	27	22	32	26	22	20

LAMPS (number of lamps)


Luminaire budgetary diagram

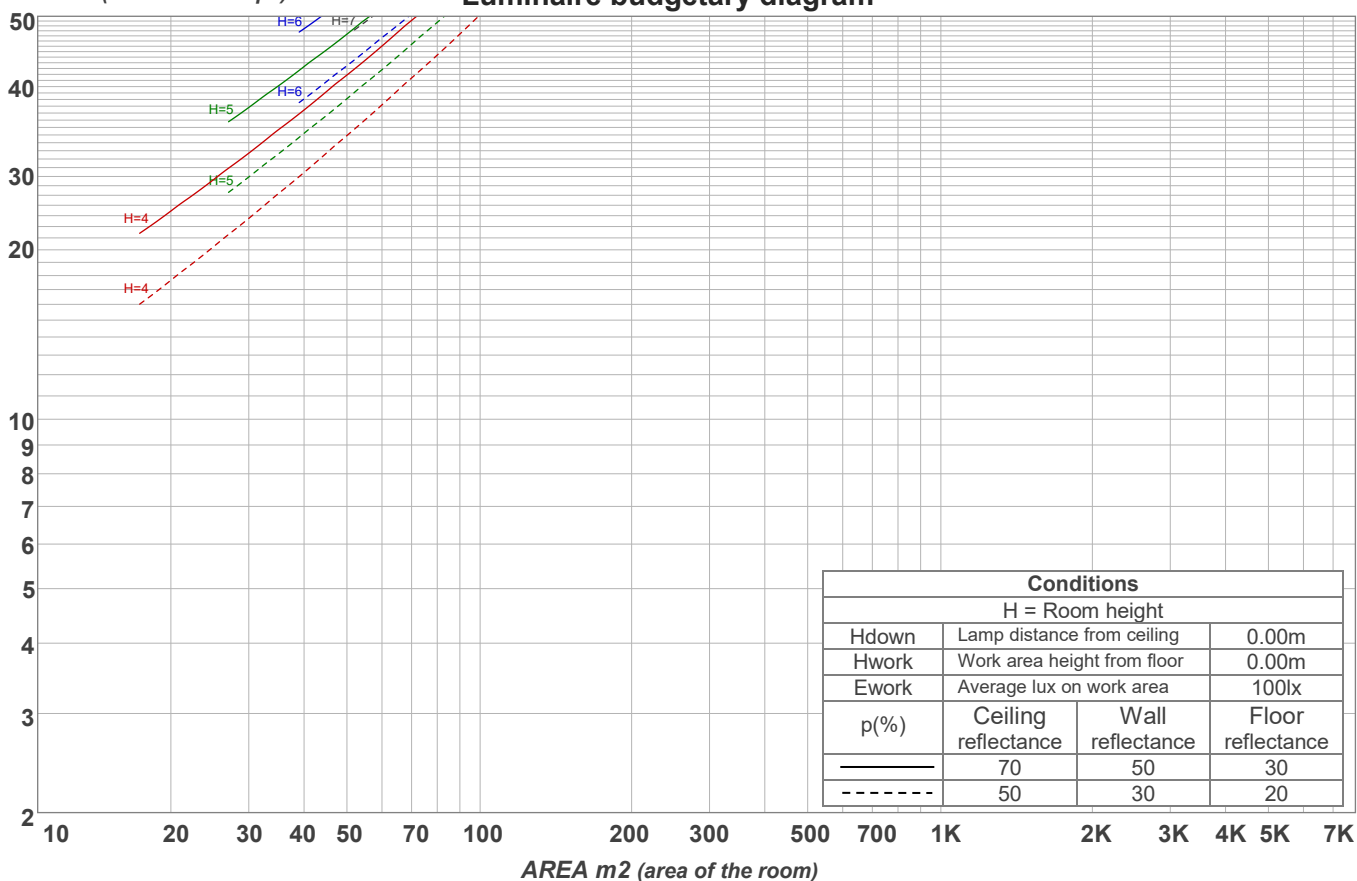

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
7,94 lm	23,0 lm	35,7 lm	44,3 lm	48,0 lm	46,3 lm	39,5 lm	28,8 lm	16,2 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
5,21 lm	1,47 lm	1,14 lm	1,03 lm	0,892 lm	0,724 lm	0,533 lm	0,327 lm	0,110 lm

Warmup curve

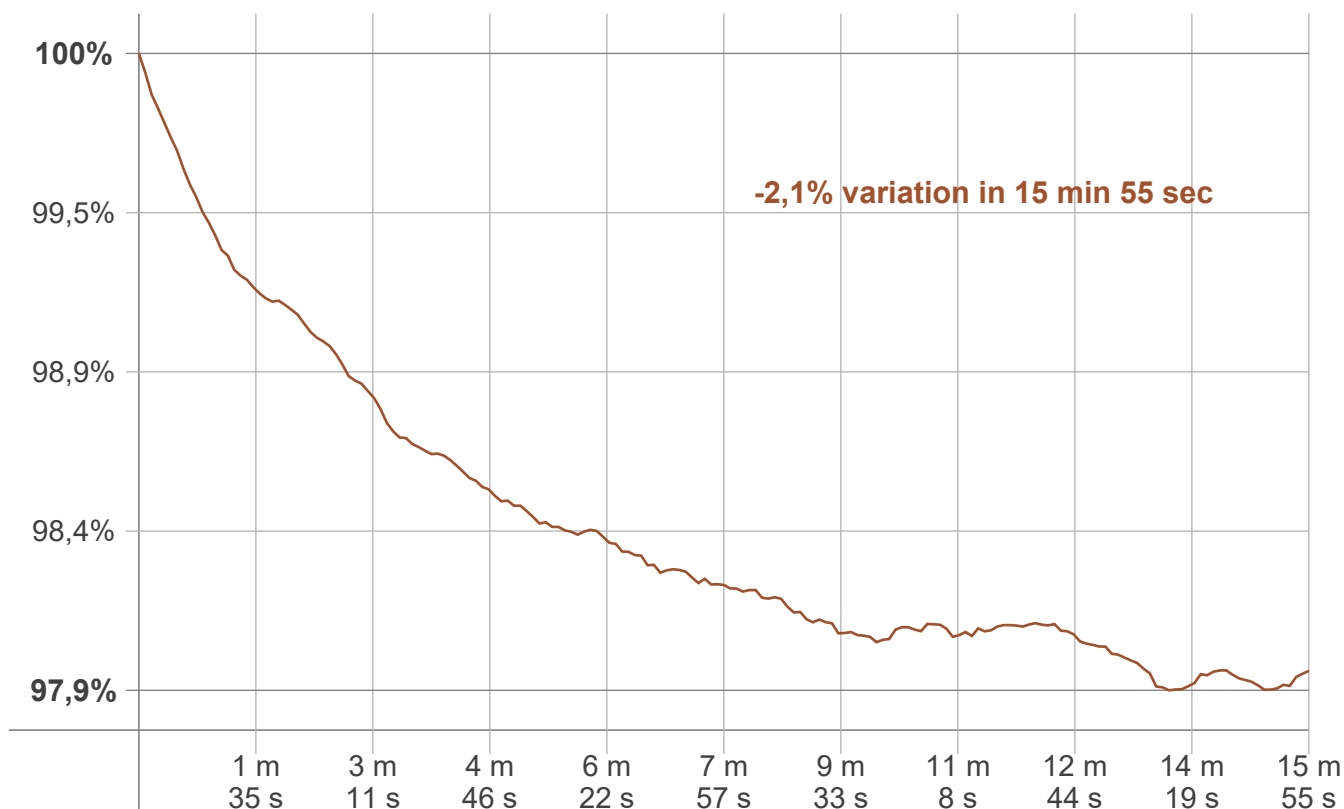

Warmup result

Warmup time:	Lamp stabilized in 15 min 55 sec
Warmup variation	-2,1%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2694 K	-6 K	2688 K

Output change

Output start	Output change	Output end
308 lm	-7 lm	301 lm