Light efficiency:

66 Lumen/Watt

Light quality:


CRI: 35,9


Color temperature:

12080 K

Output: 599 lm
Peak: 393 cd

Power: 9,1 W
PF: 1,0

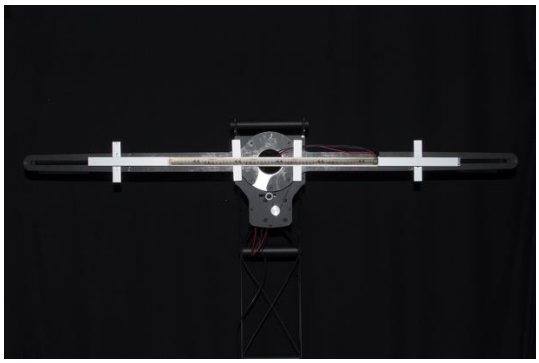

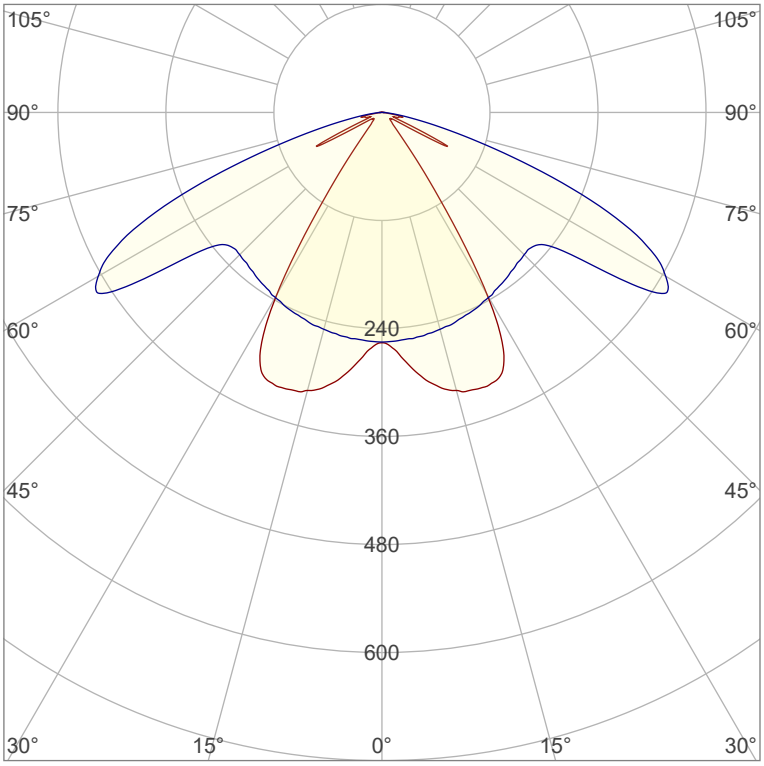

CIE 1931
x: 0,266
y: 0,286


Product name:
Defiant-3_510mm_RGB_Lens-60°-Transparent

Item number:
NP/L3C/22C/0510/RGB/L6T


Date and time:
07.07.2020 12:32:26

Description:
Toleranzen:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 K
CRI +/-0,7
Angular Resolution 1 Grad Step
Last Calibration 20.05.2020
Pruefer:
Peter Ulrich
Pruefort:
Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein


Spectra

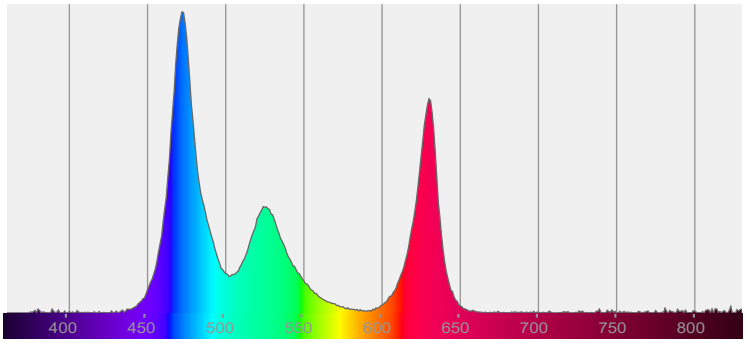


Power

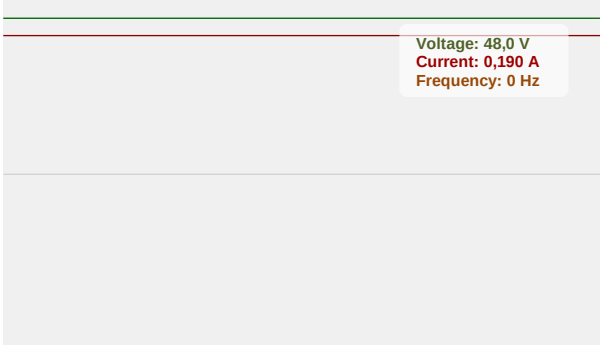

Color details

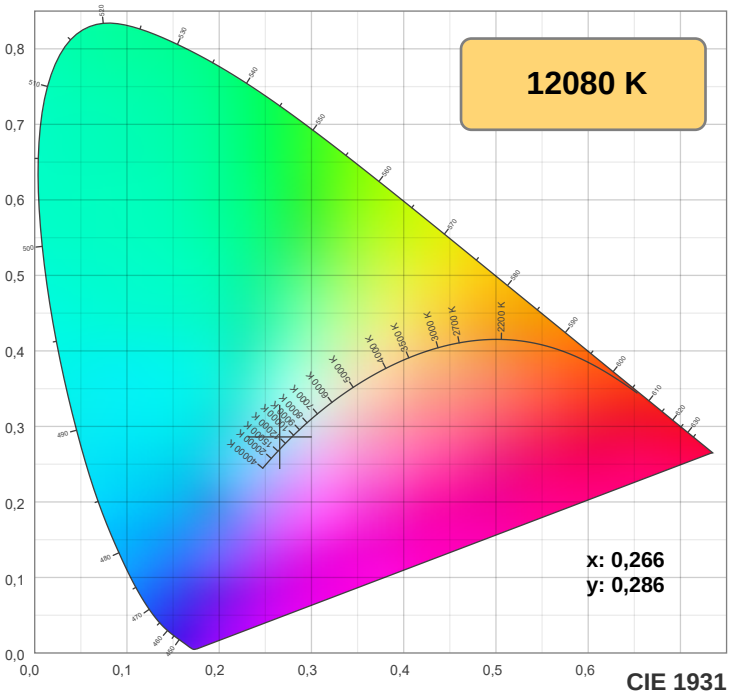


CIE 1931

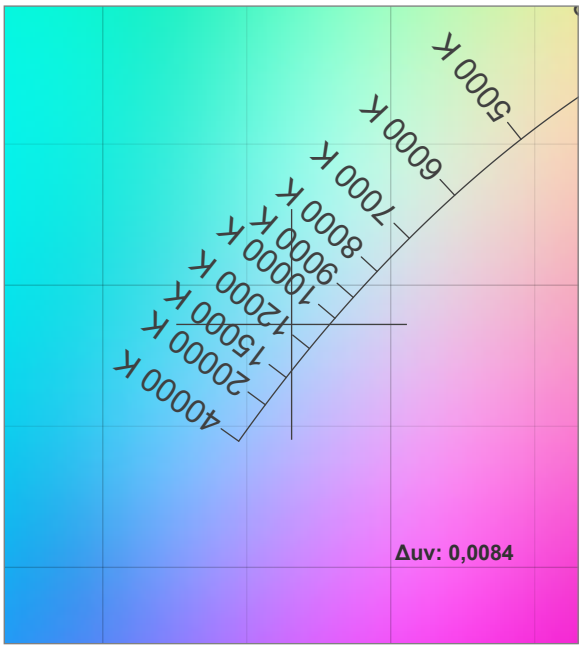


CIE 1931 ZOOM

TM30: 44,8

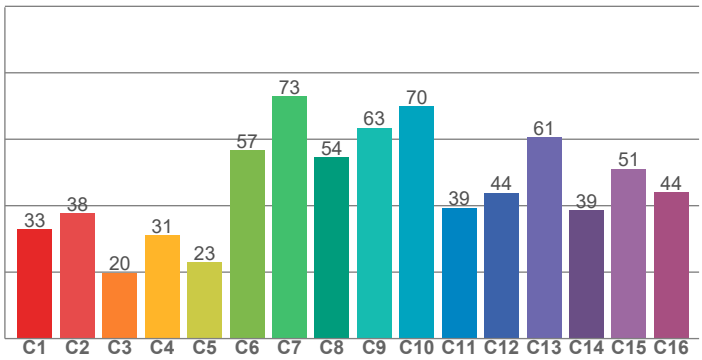

CRI: 35,9 (R1-R8)

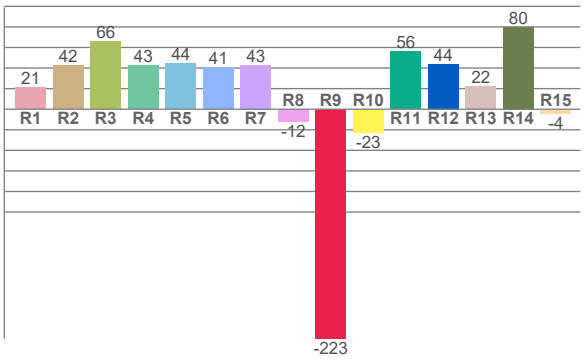

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
20,9	42,2	65,9	42,7	44,3	40,6	43,0	-12,4	-223,0	-23,0	56,1	43,8	21,8	79,7	-4,5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
32,9	37,7	19,8	31,0	23,0	56,7	72,9	54,5	63,5	69,9	39,3	43,9	60,6	38,6	51,1	44,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
46,2	42,3	47,0	55,7	88,5	76,6	68,1	66,3	56,3	27,2	18,0	13,6	35,5	69,6	49,6

CQS: 46,0

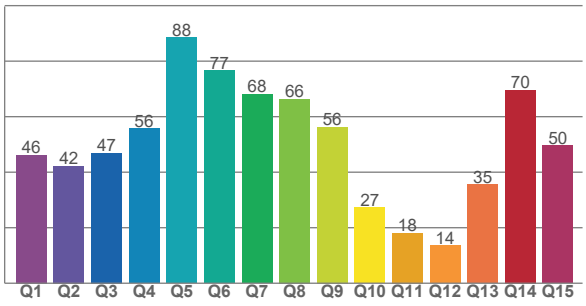

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
12080 K	35,9	-223,0	44,8	87,5	46,0	0,266	0,286	0,180	0,291	0,0084

TM30 details


Rf 44,8


Fidelity index Rf


Rg 87,5


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	33	37%	10%
2	38	28%	-19%
3	20	16%	-49%
4	31	-10%	-47%
5	23	-40%	-28%
6	57	-25%	8%
7	73	-19%	11%
8	54	11%	29%
9	63	21%	17%
10	70	16%	-6%
11	39	7%	-28%
12	44	-15%	-31%
13	61	-22%	-8%
14	39	-22%	31%
15	51	10%	40%
16	44	13%	27%

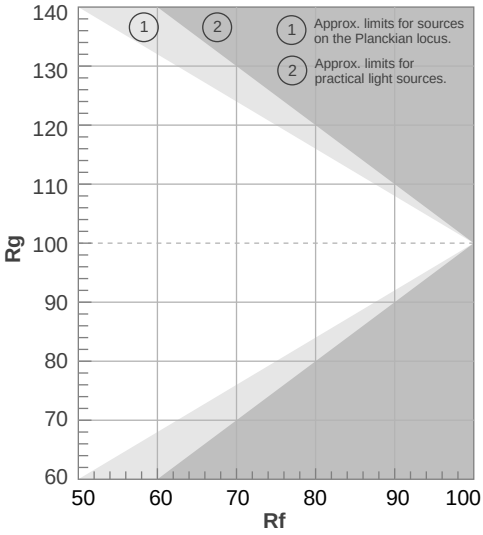


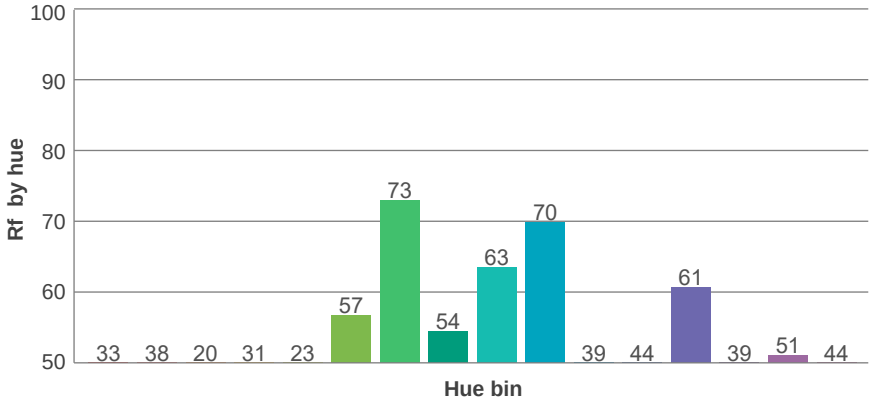

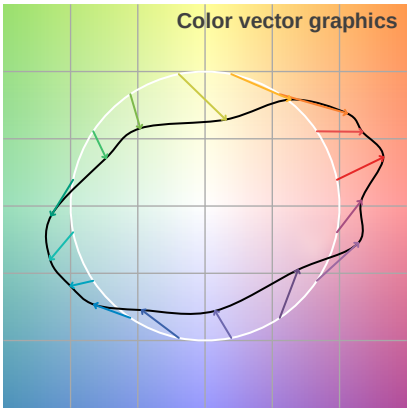


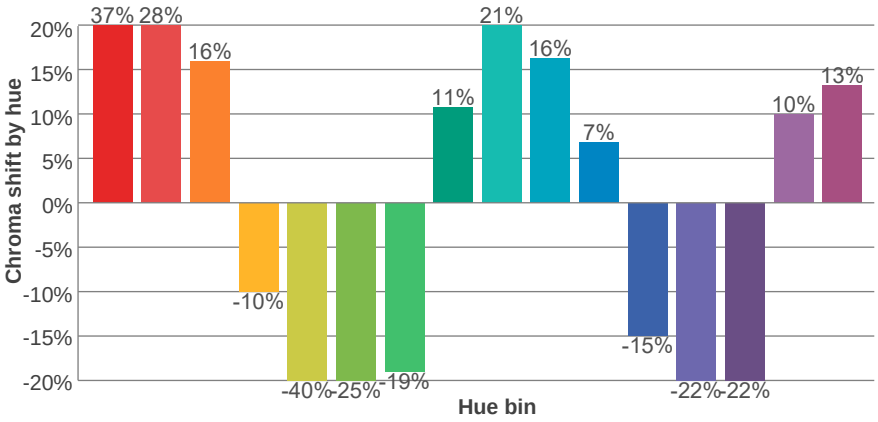

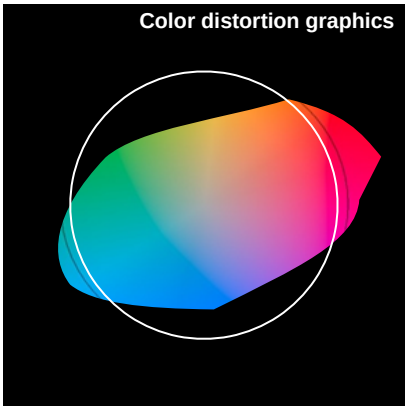

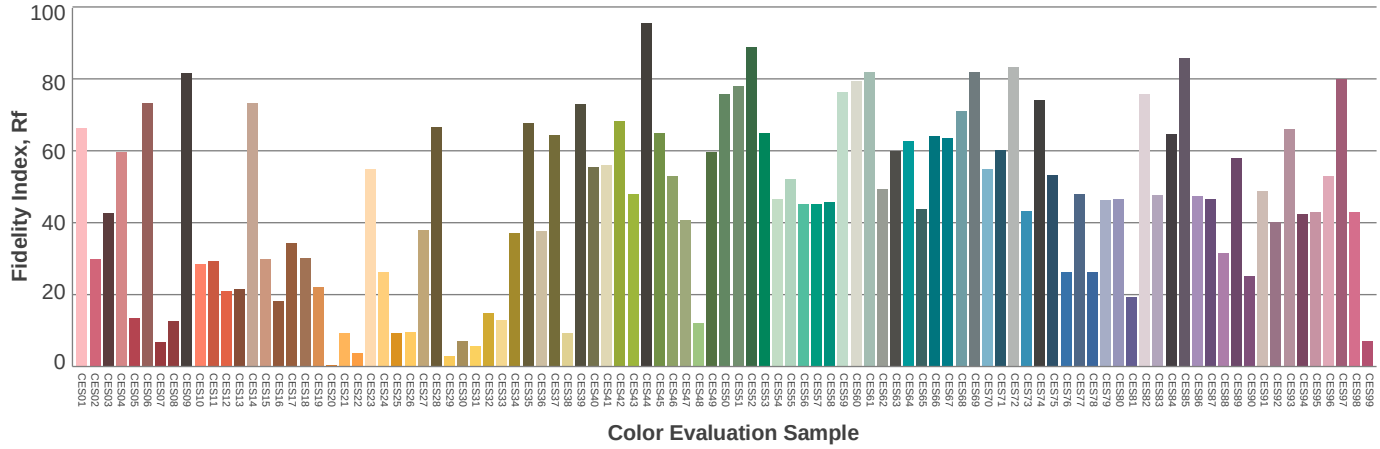

Beam details

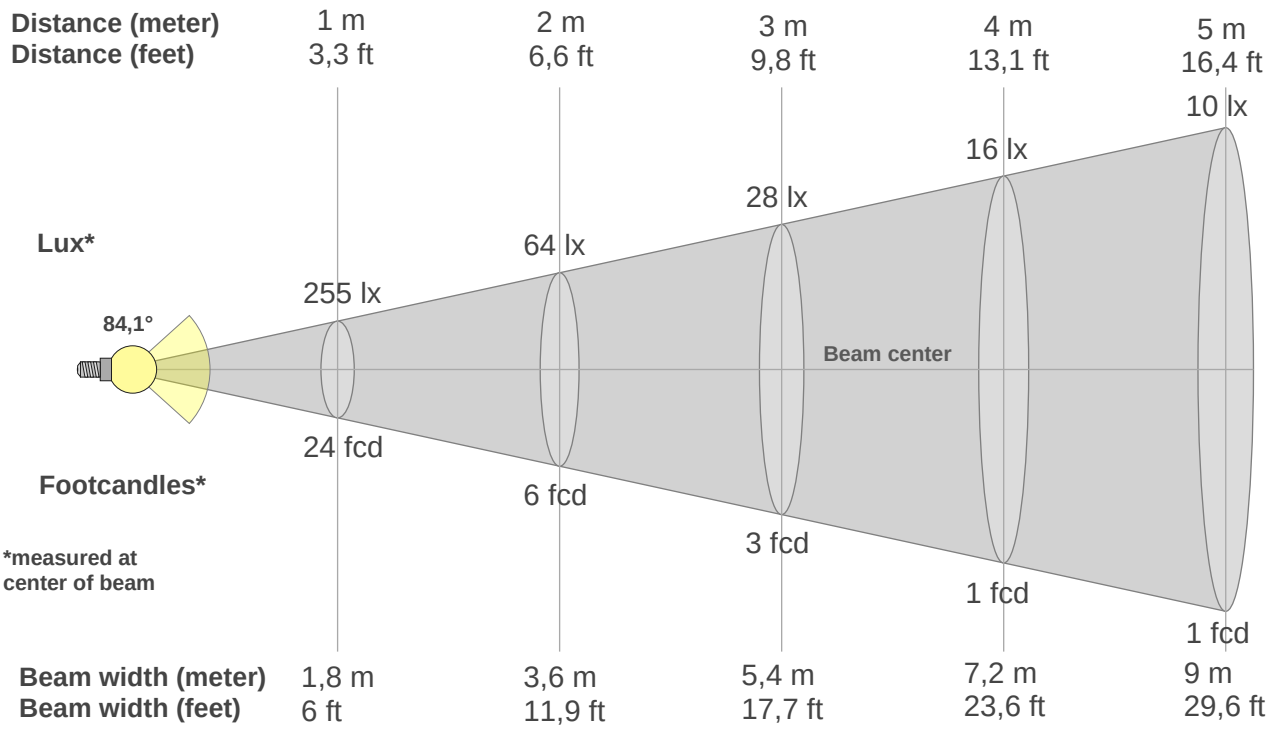

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
255lx	64lx	28lx	16lx	10lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx
23,7fcd	5,9fcd	2,6fcd	1,5fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
255	275	304	320	325	317	233	86	27	16	11	12	27	41	14	20	14	3	1	0
100%	108%	119%	125%	128%	124%	91%	34%	11%	6%	4%	5%	10%	16%	6%	8%	6%	1%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
255	254	252	249	246	242	237	232	227	223	229	321	364	300	181	79	27	7	1	1
100%	99%	99%	98%	96%	95%	93%	91%	89%	88%	90%	126%	143%	118%	71%	31%	11%	3%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
255	275	304	320	325	317	233	86	27	16	11	12	27	41	14	20	14	3	1	0
100%	108%	119%	125%	128%	124%	91%	34%	11%	6%	4%	5%	10%	16%	6%	8%	6%	1%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
255	254	252	249	246	242	237	232	227	223	229	321	364	300	181	79	27	7	1	1
100%	99%	99%	98%	96%	95%	93%	91%	89%	88%	90%	126%	143%	118%	71%	31%	11%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
84,1°	**129,9°**	**152,7°**	**84,9%**	**73,1%**

ISO candela diagram

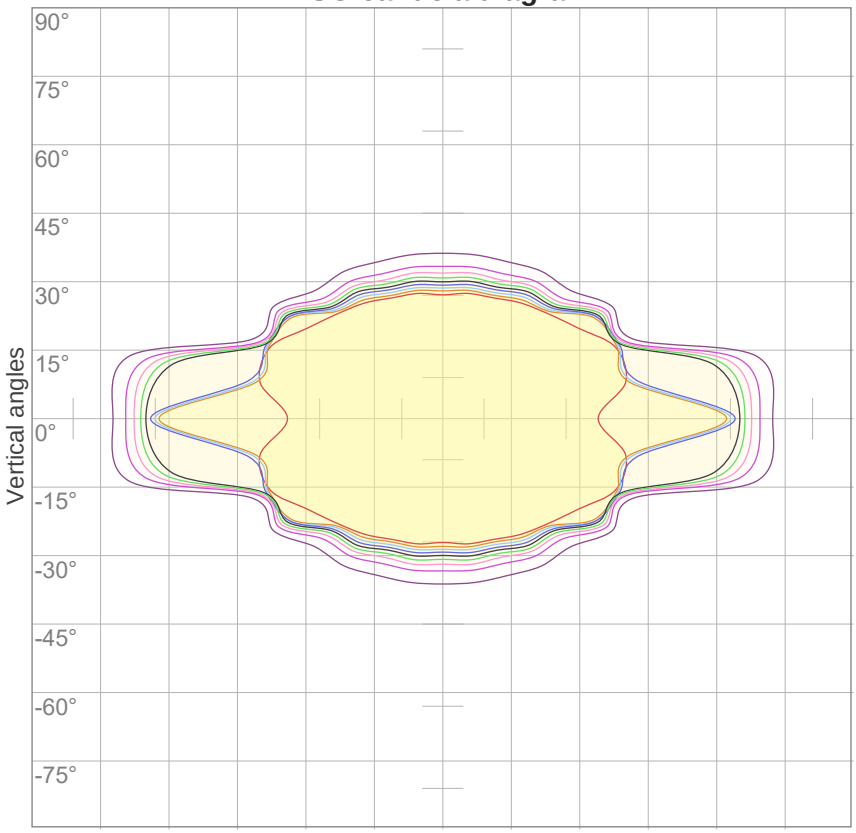


10%	25 cd
20%	51 cd
30%	76 cd
40%	102 cd
50%	127 cd
60%	153 cd
70%	178 cd
80%	204 cd
90%	229 cd

Conditions:

Number of c-planes: 16

Candela at center: 255 cd

ISO lux diagram

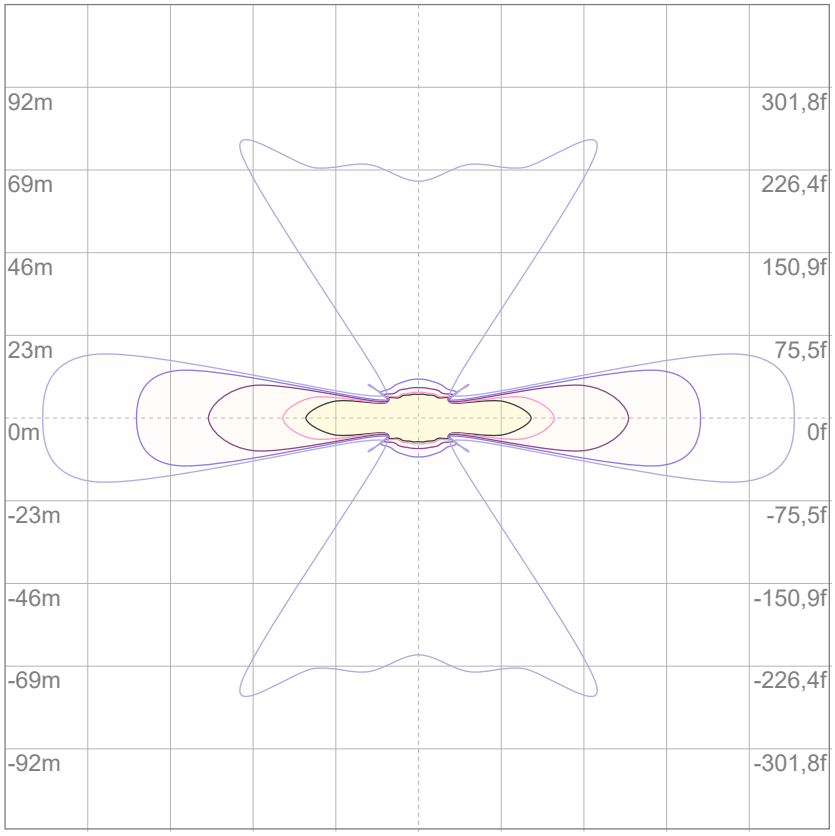

Mounting height: 10 meters (33 feet)

3%	76,5m lx
5%	0,127 lx
10%	0,255 lx
30%	0,765 lx
50%	1,27 lx

Conditions:

Number of c-planes: 16

Lux at center: 2,55 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	14,3	15,3	14,4	15,5	15,8	25,4	26,4	25,6	26,7	26,9
	3H	15,7	16,8	16,1	17,0	17,2	27,6	28,7	28,0	29,0	29,1
	4H	16,2	17,2	16,6	17,5	17,7	28,0	29,1	28,4	29,3	29,6
	6H	16,9	17,8	17,2	18,1	18,5	28,2	29,1	28,5	29,4	29,8
	8H	17,0	17,8	17,3	18,2	18,6	28,2	29,1	28,6	29,4	29,8
	12H	16,9	17,8	17,3	18,1	18,6	28,2	29,0	28,6	29,4	29,8
4H	2H	14,5	15,5	14,9	15,8	16,0	25,0	26,1	25,4	26,3	26,6
	3H	16,3	17,1	16,6	17,5	17,9	27,4	28,3	27,8	28,6	29,1
	4H	16,8	17,6	17,2	18,0	18,5	27,8	28,6	28,2	29,0	29,5
	6H	17,7	18,5	18,2	18,9	19,2	28,0	28,7	28,5	29,1	29,4
	8H	17,8	18,5	18,3	18,9	19,3	28,0	28,7	28,5	29,0	29,4
	12H	17,8	18,4	18,3	18,8	19,3	28,0	28,5	28,4	28,9	29,4
8H	4H	16,9	17,6	17,4	18,0	18,4	27,7	28,4	28,2	28,7	29,1
	6H	18,1	18,6	18,6	19,1	19,6	27,9	28,4	28,4	28,8	29,4
	8H	18,3	18,7	18,8	19,3	19,9	27,9	28,4	28,4	28,9	29,5
	12H	18,3	18,7	18,9	19,2	19,8	27,9	28,3	28,5	28,8	29,4
12H	4H	16,9	17,5	17,4	17,9	18,4	27,6	28,2	28,1	28,6	29,1
	6H	18,2	18,6	18,7	19,2	19,8	27,9	28,3	28,4	28,8	29,5
	8H	18,4	18,8	19,0	19,3	19,9	27,9	28,3	28,5	28,8	29,4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,8 / -1,4					1,3 / -2,0				
S = 1.5H		2,5 / -1,8					2,7 / -5,3				
S = 2.0H		2,8 / -1,9					4,3 / -8,0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 599 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	110	106	103	99	108	104	101	98	100	97	94	96	93	91	92	90	89	87
2	102	95	89	84	99	93	88	83	89	85	81	86	82	79	83	80	77	75
3	94	85	78	73	92	84	77	72	81	75	71	78	73	69	75	72	68	66
4	88	77	70	64	85	76	69	63	73	67	62	71	66	61	69	64	61	59
5	82	70	62	56	80	69	62	56	67	61	56	65	59	55	63	58	54	52
6	76	64	56	51	74	63	56	50	62	55	50	60	54	49	58	53	49	47
7	71	59	51	46	69	58	51	46	57	50	45	55	49	45	54	49	45	43
8	67	54	47	42	65	54	47	41	52	46	41	51	45	41	50	45	41	39
9	63	50	43	38	61	50	43	38	49	42	38	48	42	37	47	41	37	36
10	59	47	40	35	58	46	39	35	45	39	35	44	39	34	44	38	34	33

Luminaire budgetary diagram

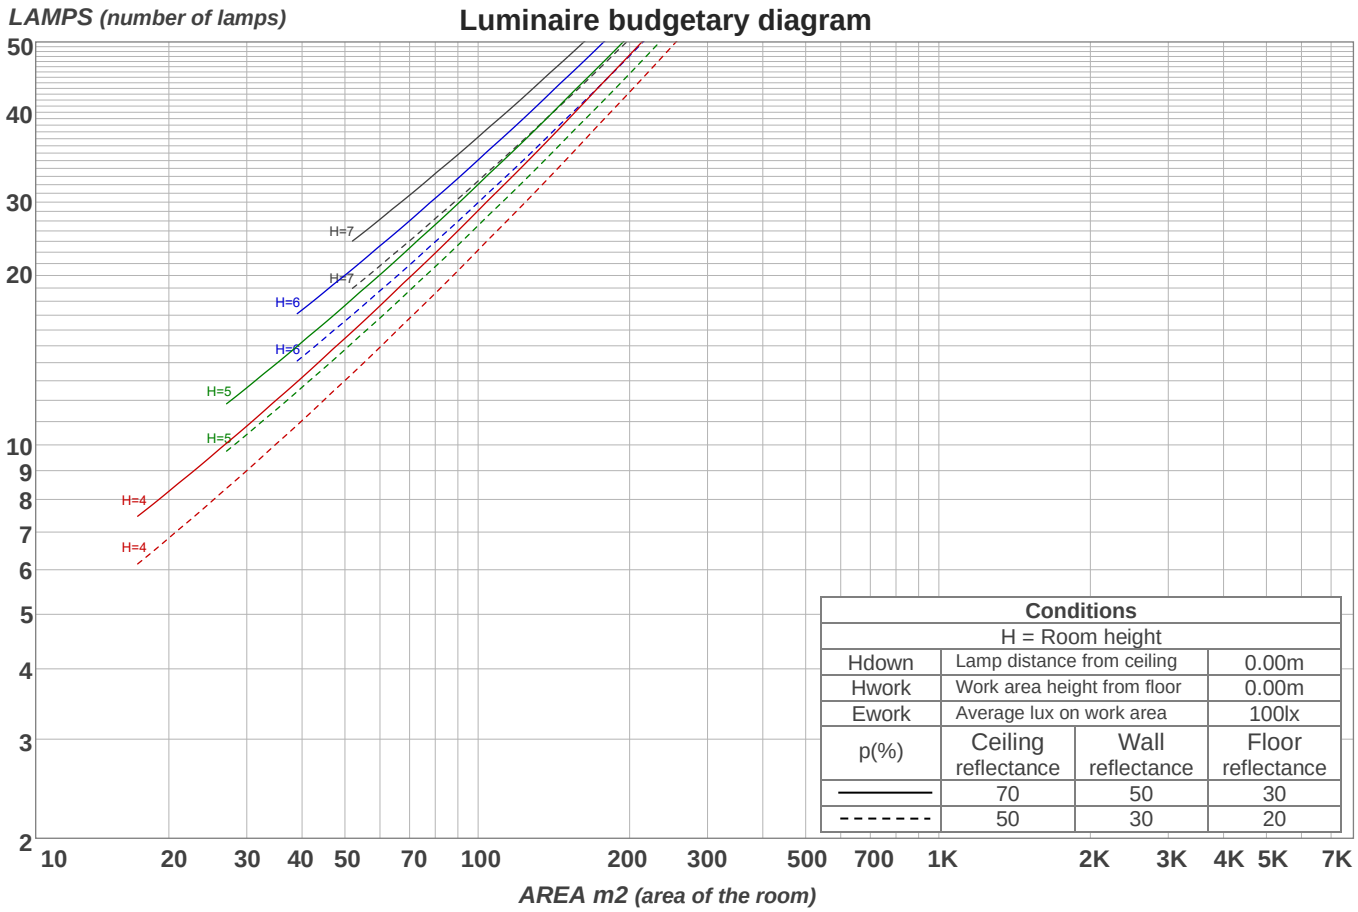


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
25,9 lm	84,0 lm	141 lm	137 lm	77,4 lm	43,9 lm	54,9 lm	24,2 lm	6,76 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,08 lm	0,941 lm	0,702 lm	0,600 lm	0,471 lm	0,349 lm	0,257 lm	0,158 lm	0,053 lm

Warmup curve

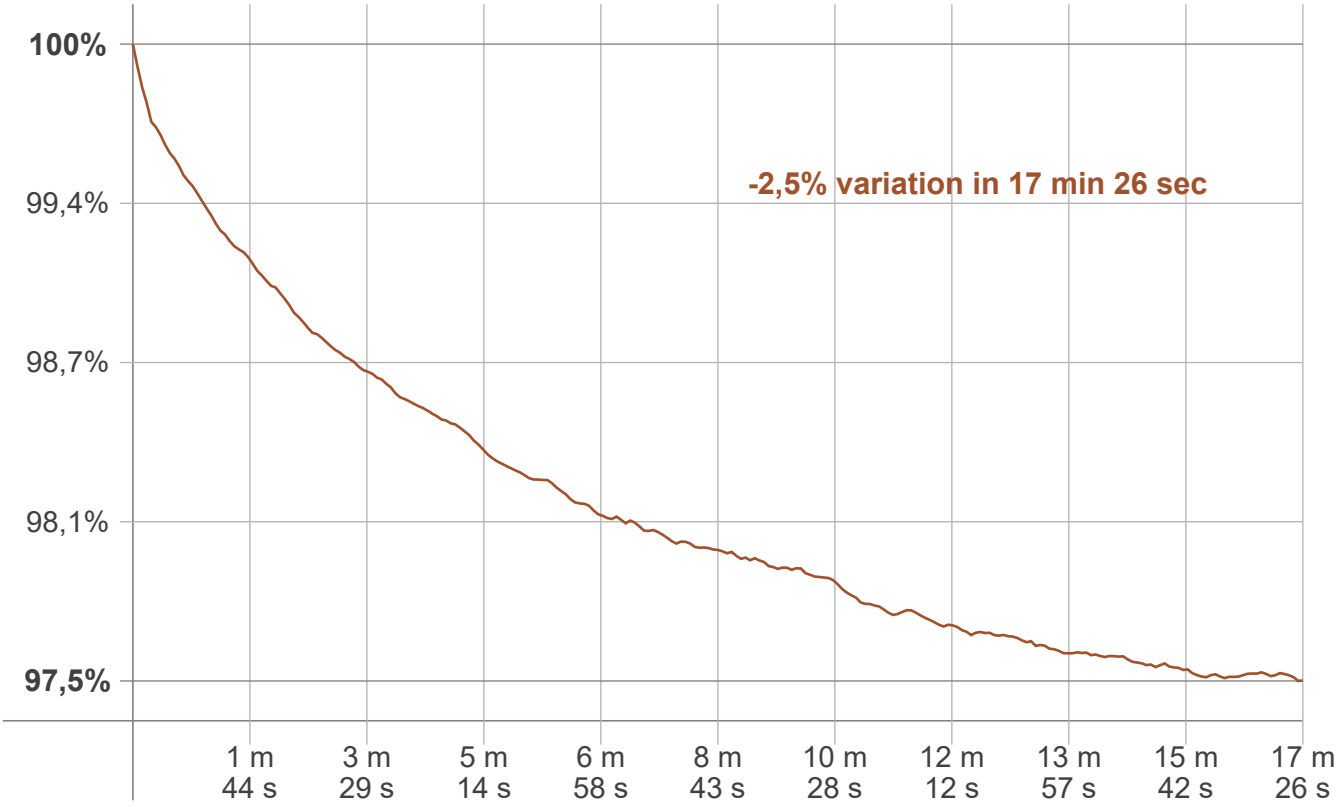

Warmup result

Warmup time:	**Lamp stabilized in 17 min 26 sec**
Warmup variation	**-2,5%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
11504 K	**+576 K**	**12080 K**

Output change

Output start	Output change	Output end
617 lm	**-18 lm**	**599 lm**