Light efficiency:

119 Lumen/Watt

Light quality:


CRI: 0,0


Color temperature:

0 K

Output: 912 lm
Peak: 1053 cd

Power: 7,7 W
PF: 1,0

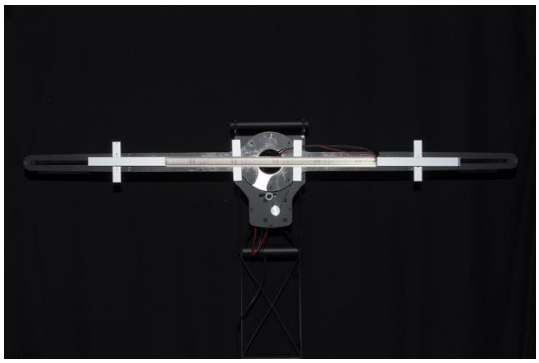

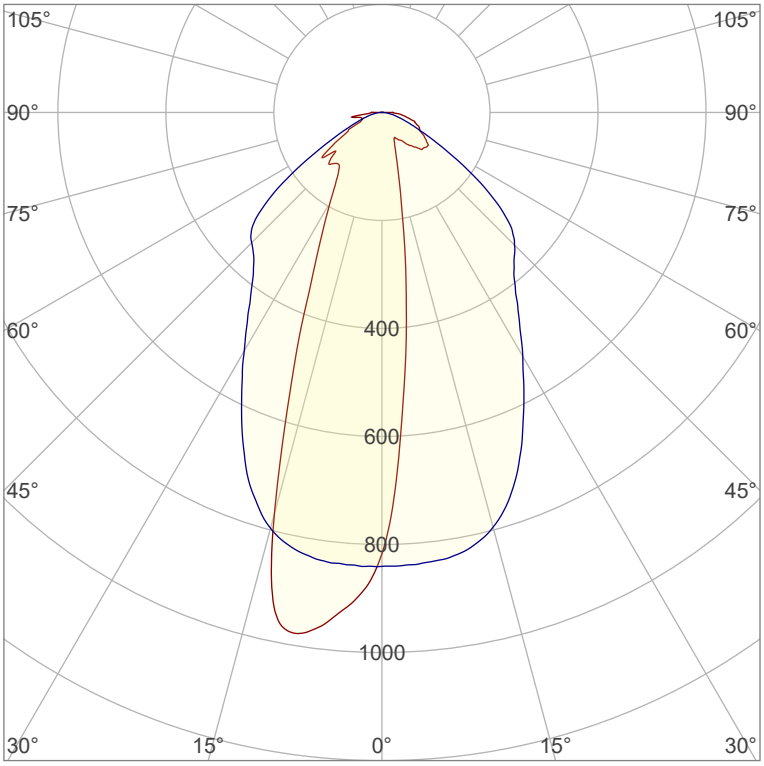

Product name:
Defiant-3_510mm_XXG_Lens-Asymmetric-Frosted-2


Item number:
NP/L3C/22C/0510/XXG/LAF-2

Date and time:
08.07.2020 16:40:20


Description:
Toleranzen:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 K
CRI +/-0,7
Angular Resolution 1 Grad Step
Last Calibration 20.05.2020
Pruefer:
Peter Ulrich
Pruefort:
Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,200
y: 0,727


Spectra

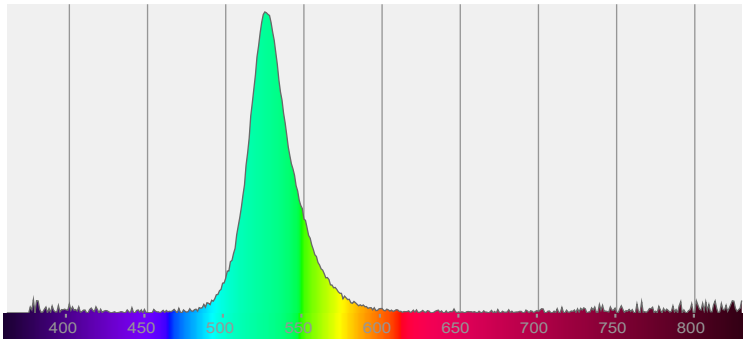


Power

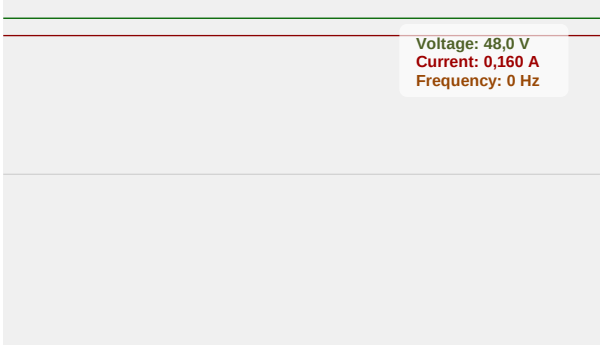

Color details

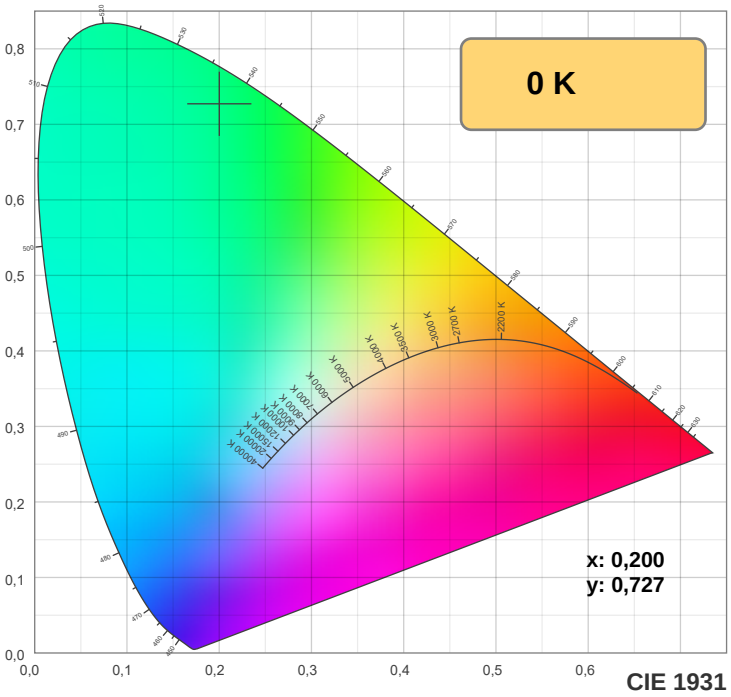


CIE 1931

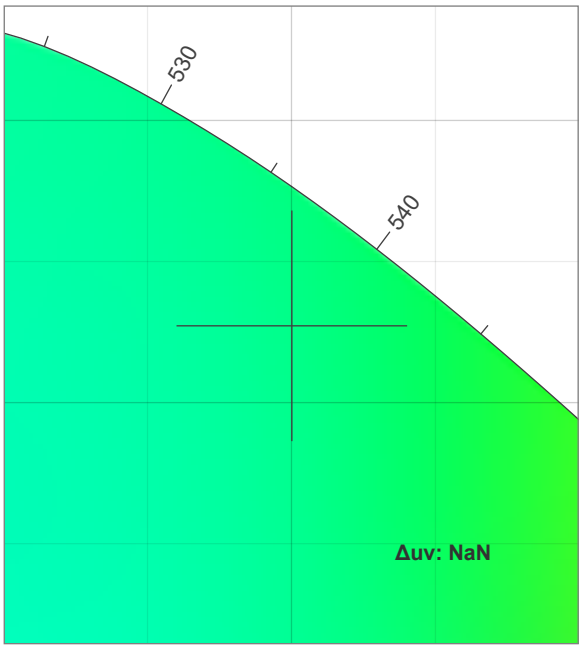


CIE 1931 ZOOM

TM30: 0,0

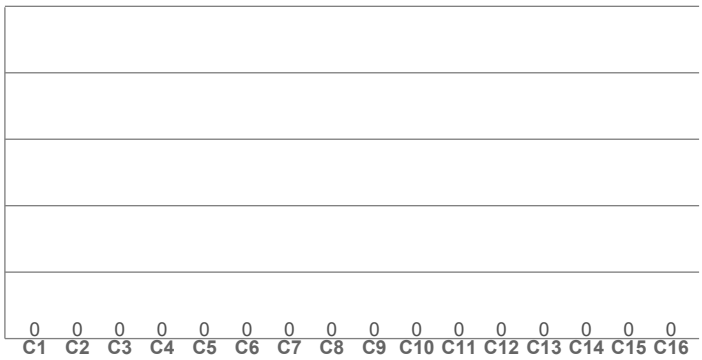

CRI: 0,0 (R1-R8)

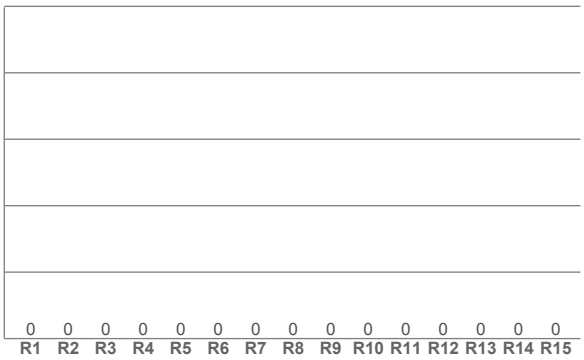

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS: 0,0

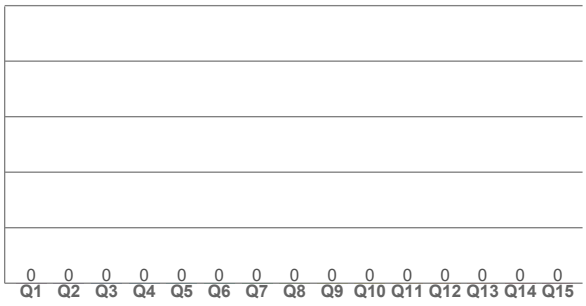

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0,0	0,0	0,0	0,0	0,0	0,200	0,727	0,071	0,385	NaN

TM30 details


Rf 0,0

Fidelity index Rf


Rg 0,0

Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

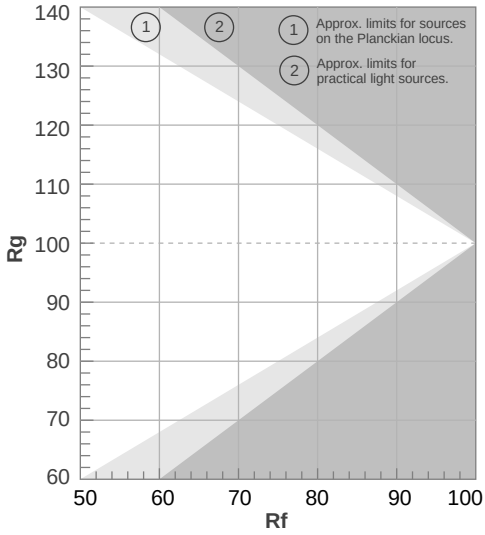




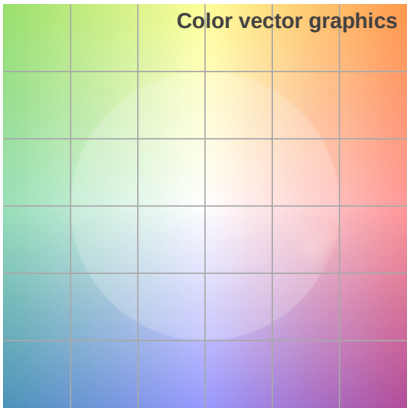




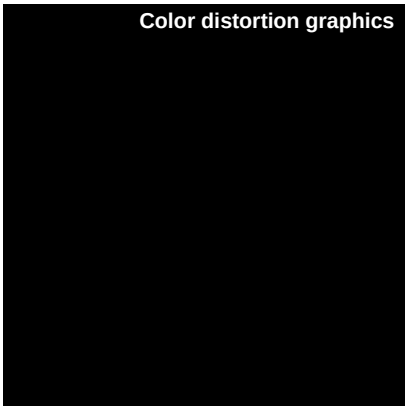

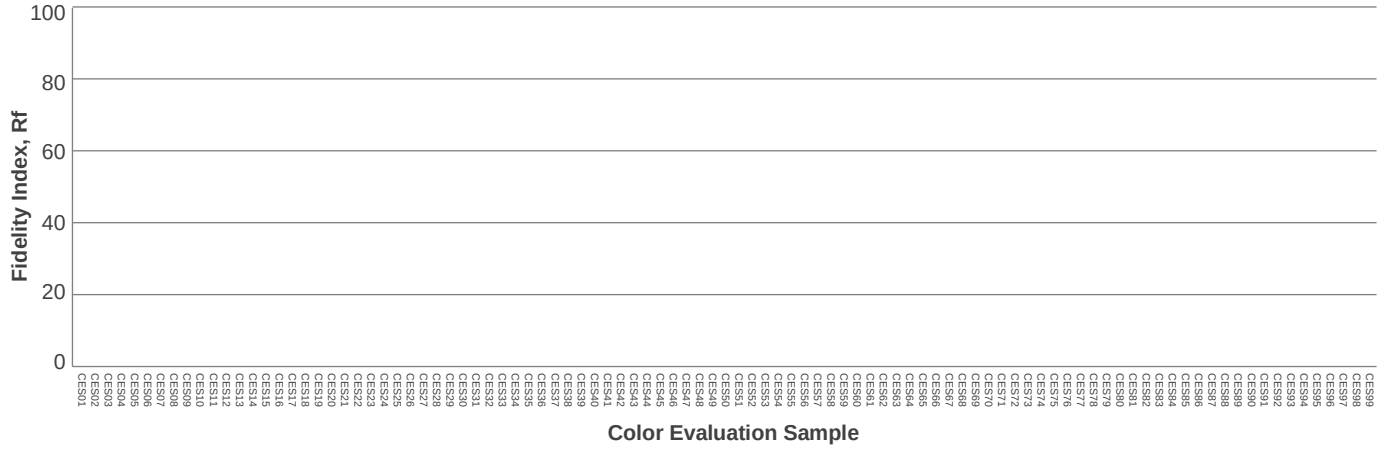

Beam details

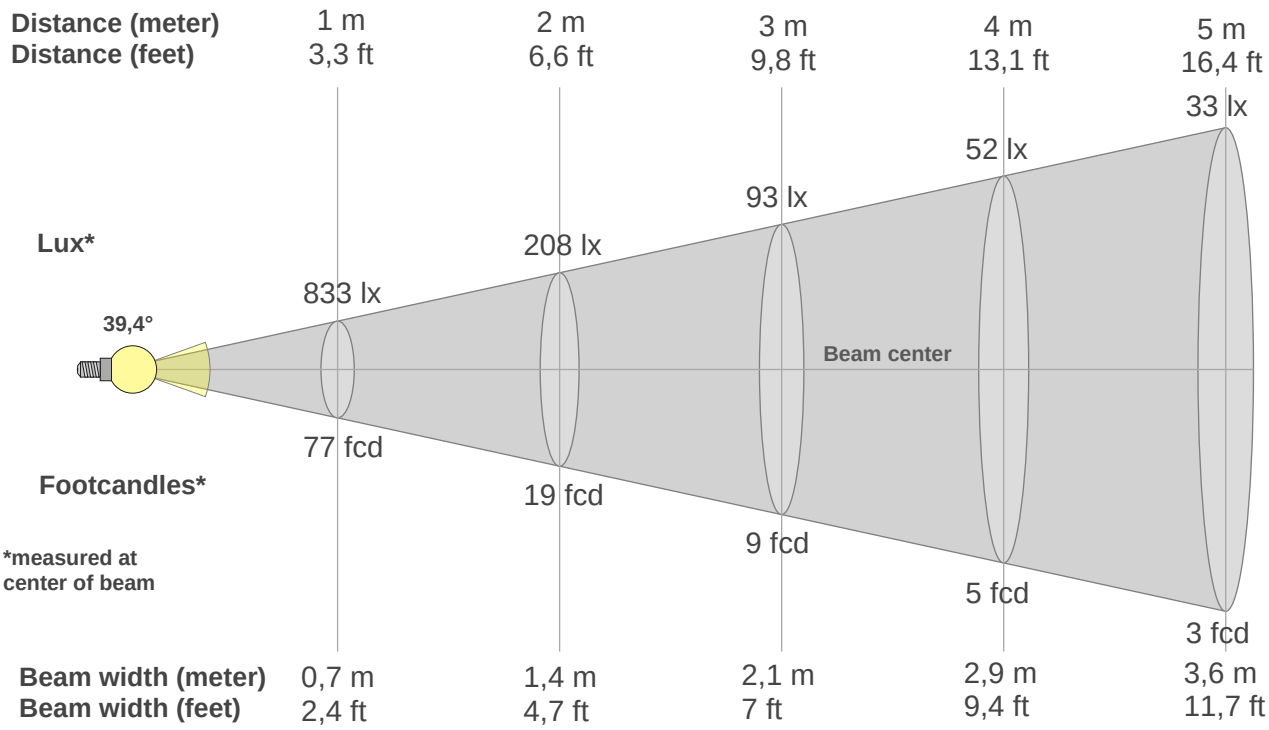

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
833lx	208lx	93lx	52lx	33lx	23lx	17lx	13lx	10lx	8lx	7lx	6lx	5lx	4lx	4lx	3lx	3lx	3lx	2lx	2lx
77,4fcd	19,3fcd	8,6fcd	4,8fcd	3,1fcd	2,1fcd	1,6fcd	1,2fcd	1fcd	0,8fcd	0,6fcd	0,5fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
833	698	550	429	322	237	173	134	106	86	73	62	55	52	54	57	60	62	67	74
100%	84%	66%	52%	39%	29%	21%	16%	13%	10%	9%	8%	7%	6%	6%	7%	7%	7%	8%	9%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
833	840	839	837	835	829	819	805	784	757	723	683	641	600	559	521	485	453	424	400
100%	101%	101%	101%	100%	100%	98%	97%	94%	91%	87%	82%	77%	72%	67%	63%	58%	54%	51%	48%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
833	881	917	947	970	976	946	843	693	558	454	362	301	255	220	192	168	150	137	128
100%	106%	110%	114%	116%	117%	114%	101%	83%	67%	54%	44%	36%	31%	26%	23%	20%	18%	16%	15%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
833	841	840	839	836	830	821	807	786	756	723	681	637	593	550	510	474	441	412	388
100%	101%	101%	101%	100%	100%	99%	97%	94%	91%	87%	82%	77%	71%	66%	61%	57%	53%	50%	47%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
39,4°	**93,9°**	**171,7°**	**83,9%**	**66,1%**

ISO candela diagram

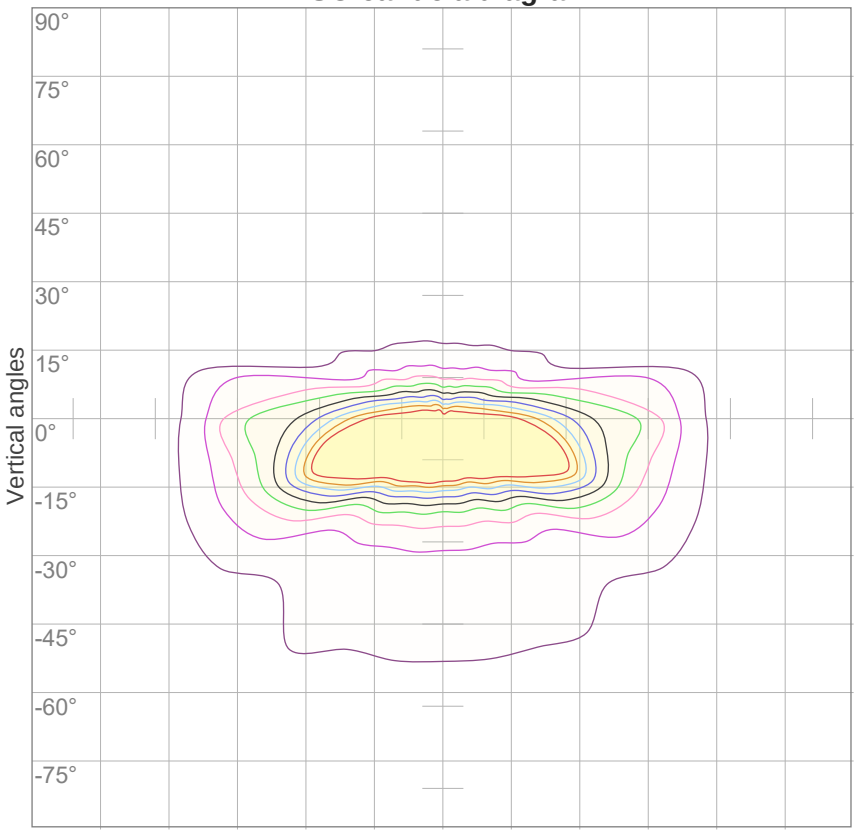


10%	83 cd
20%	167 cd
30%	250 cd
40%	333 cd
50%	416 cd
60%	500 cd
70%	583 cd
80%	666 cd
90%	749 cd

Conditions:

Number of c-planes: 16

Candela at center: 833 cd

ISO lux diagram

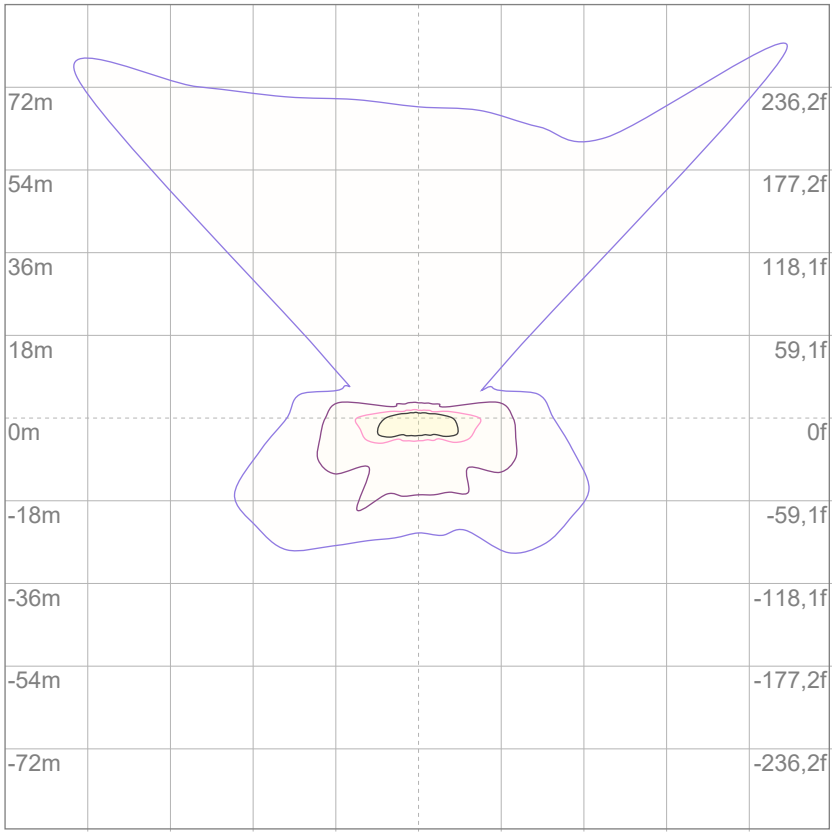

Mounting height: 10 meters (33 feet)

3%	0,250 lx
5%	0,416 lx
10%	0,833 lx
30%	2,50 lx
50%	4,16 lx

Conditions:

Number of c-planes: 16

Lux at center: 8,33 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare Evaluation According to UGR


p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
Standard table	n/a					n/a				
Correction summand	n/a					n/a				
Corrected glare indices referring to 912 lm total luminous flux										

UGR data could not be calculated due to missing/wrong symmetry. Go to Edit -> Photometric -> Corrections and select Correct asymmetry (UGR not defined for asymmetrical distributions)..

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	105	101	98	107	103	99	96	99	96	93	95	92	90	91	89	87	85
2	101	94	88	83	99	92	86	82	89	84	80	85	81	78	82	79	76	74
3	94	84	77	71	91	83	76	71	80	74	70	77	73	68	75	71	67	65
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58
5	81	70	62	56	79	69	62	56	67	60	55	65	59	55	63	58	54	52
6	76	64	57	51	74	64	56	51	62	55	50	60	54	50	59	54	49	48
7	72	60	52	46	70	59	51	46	57	51	46	56	50	46	55	49	45	44
8	67	55	48	43	66	55	48	42	54	47	42	52	46	42	51	46	42	40
9	64	52	44	39	62	51	44	39	50	44	39	49	43	39	48	43	39	37
10	60	49	41	37	59	48	41	37	47	41	36	46	40	36	45	40	36	35

Luminaire budgetary diagram

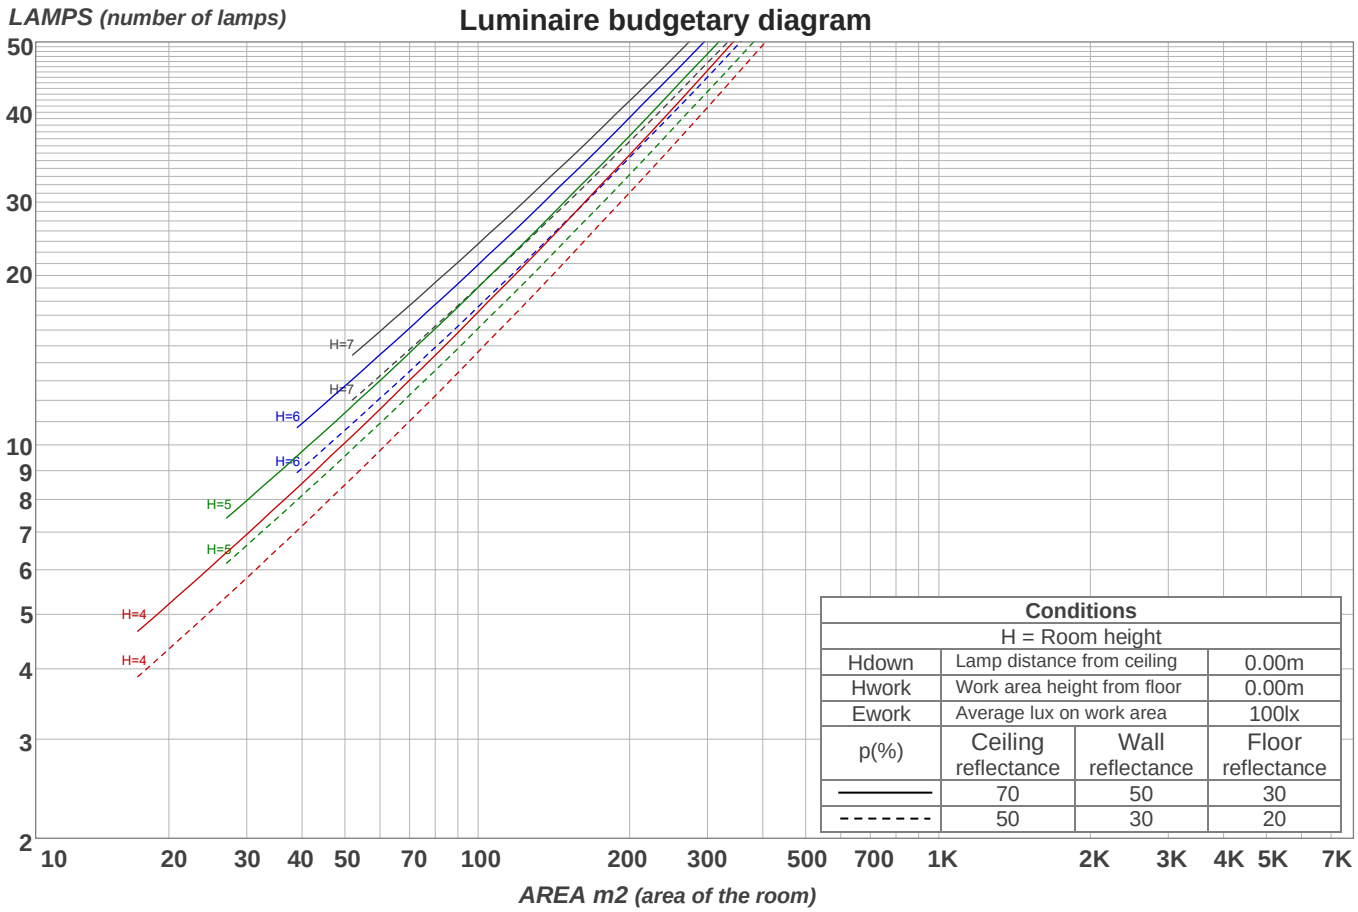


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
71,3 lm	163 lm	168 lm	140 lm	121 lm	102 lm	68,5 lm	46,0 lm	32,7 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,090 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm

Warmup curve

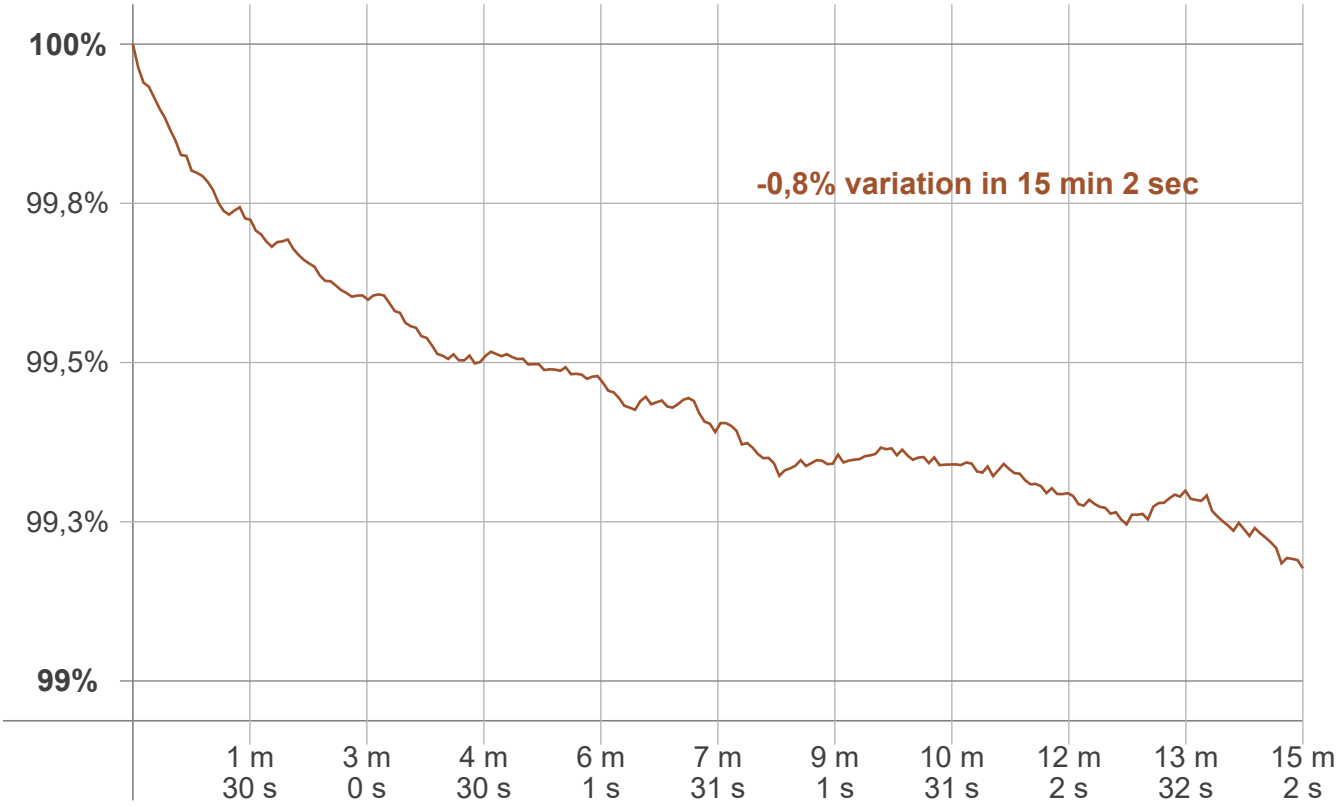

Warmup result

Warmup time:	**Lamp stabilized in 15 min 2 sec**
Warmup variation	**-0,8%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
0 K	0 K	0 K

Output change

Output start	Output change	Output end
920 lm	-8 lm	912 lm