Light efficiency:

31 Lumen/Watt

Light quality:


CRI: 0,0


Color temperature:

0 K

Output: 301 lm
Peak: 783 cd

Power: 9,6 W
PF: 1,0

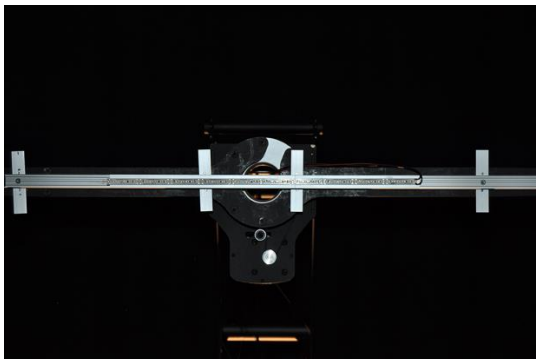

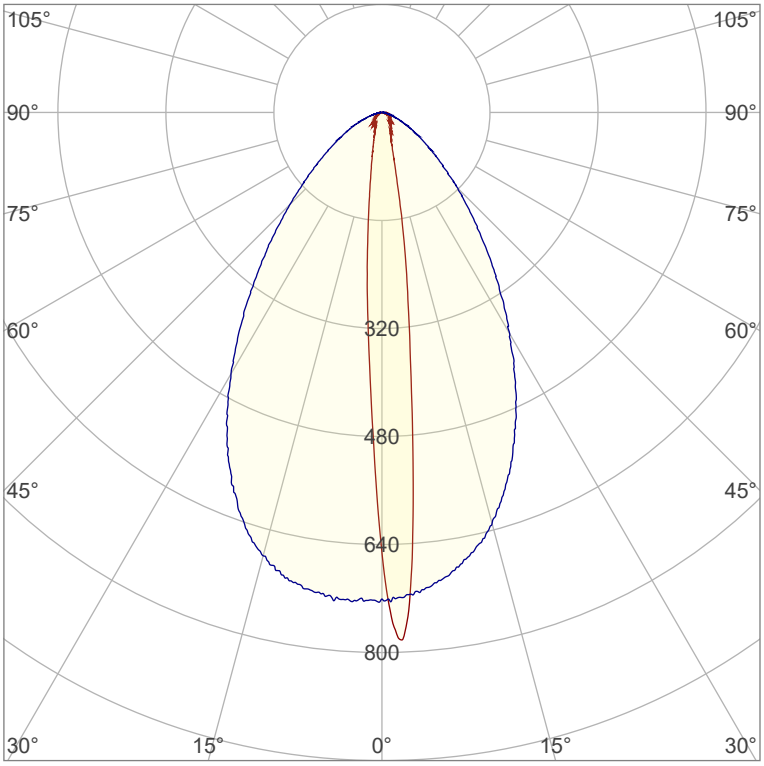

Product name:
Defiant-3_510mm_XXR_Inlay-Lens-Wallwasher


Item number:
NP/L3C/22C/0510/XXR/ILWW

Date and time:
01.09.2025 13:38:44


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 13.10.2023
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,689
y: 0,306


Spectra

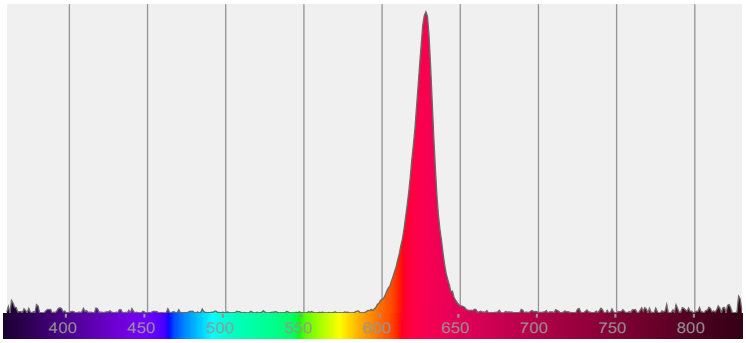


Power

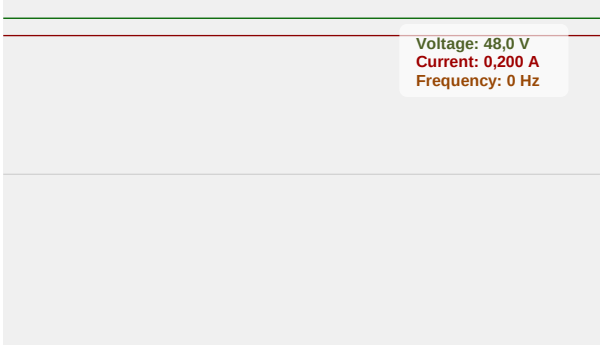


Color details

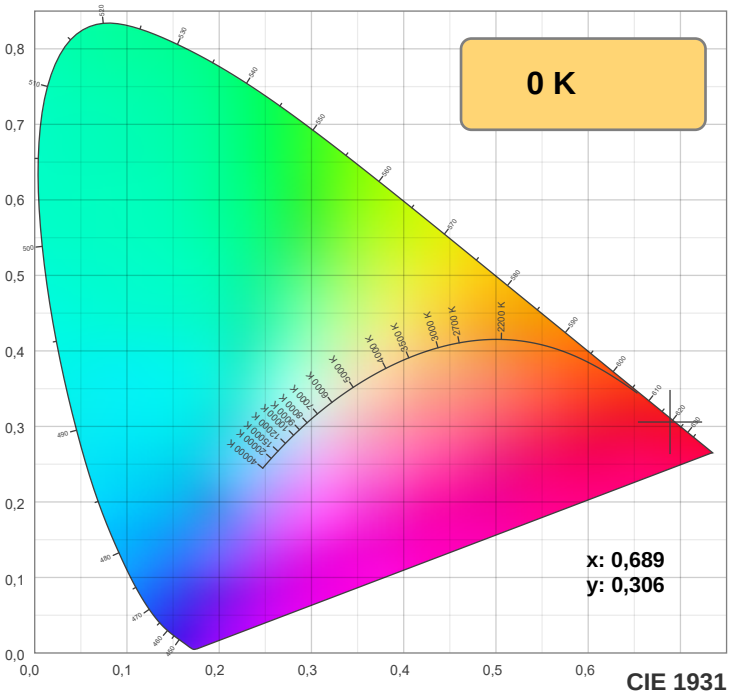


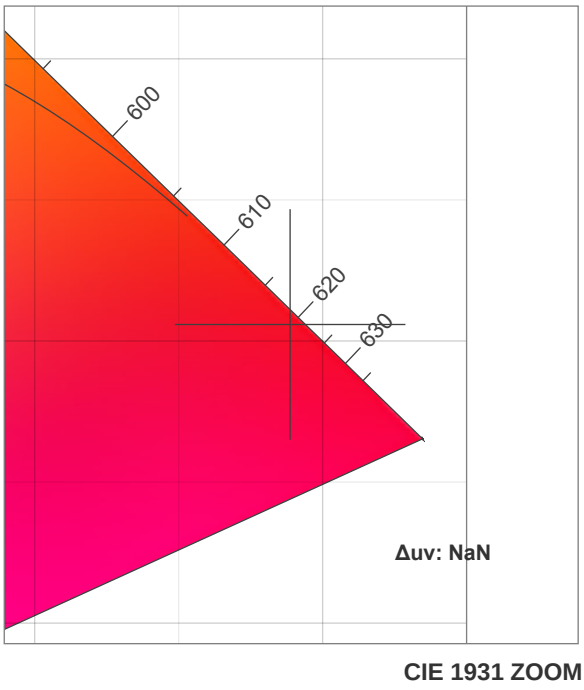

TM30: 0,0

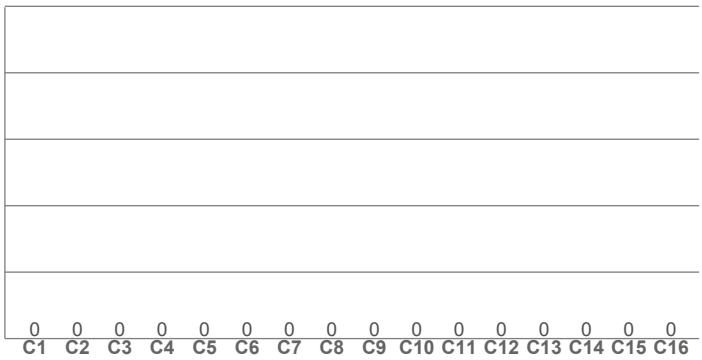

CRI: 0,0 (R1-R8)

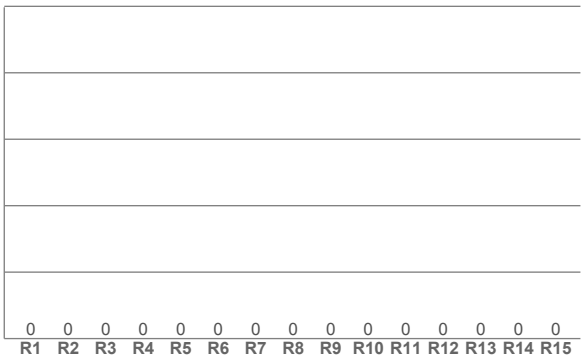

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS: 0,0

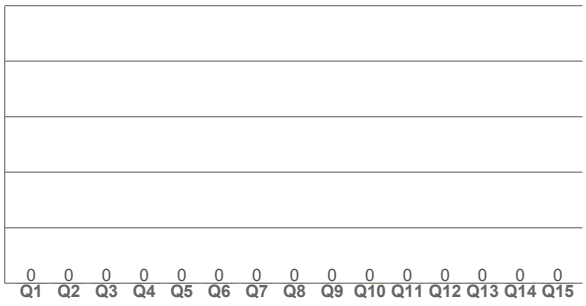

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0,0	0,0	0,0	0,0	0,0	0,689	0,306	0,520	0,347	NaN

TM30 details


Rf 0,0

Fidelity index Rf


Rg 0,0

Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

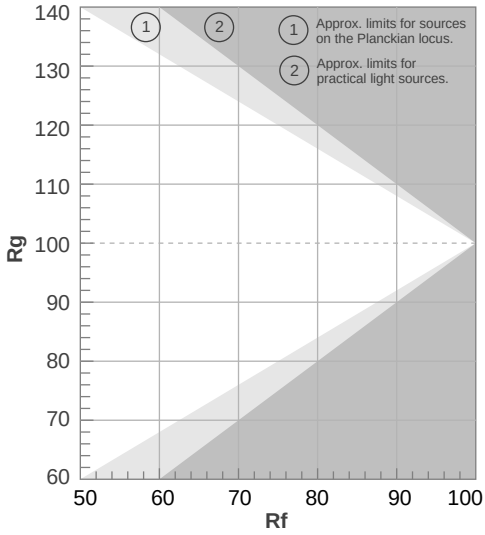




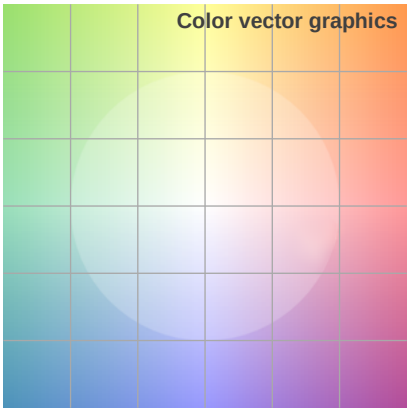




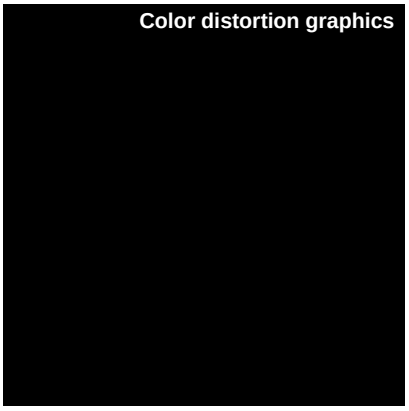

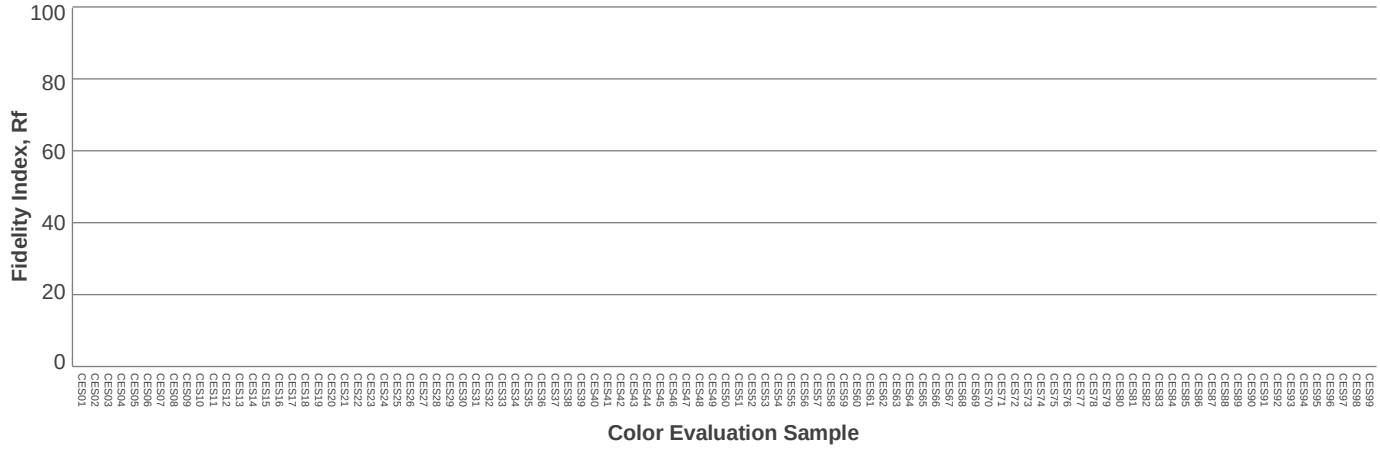

Beam details

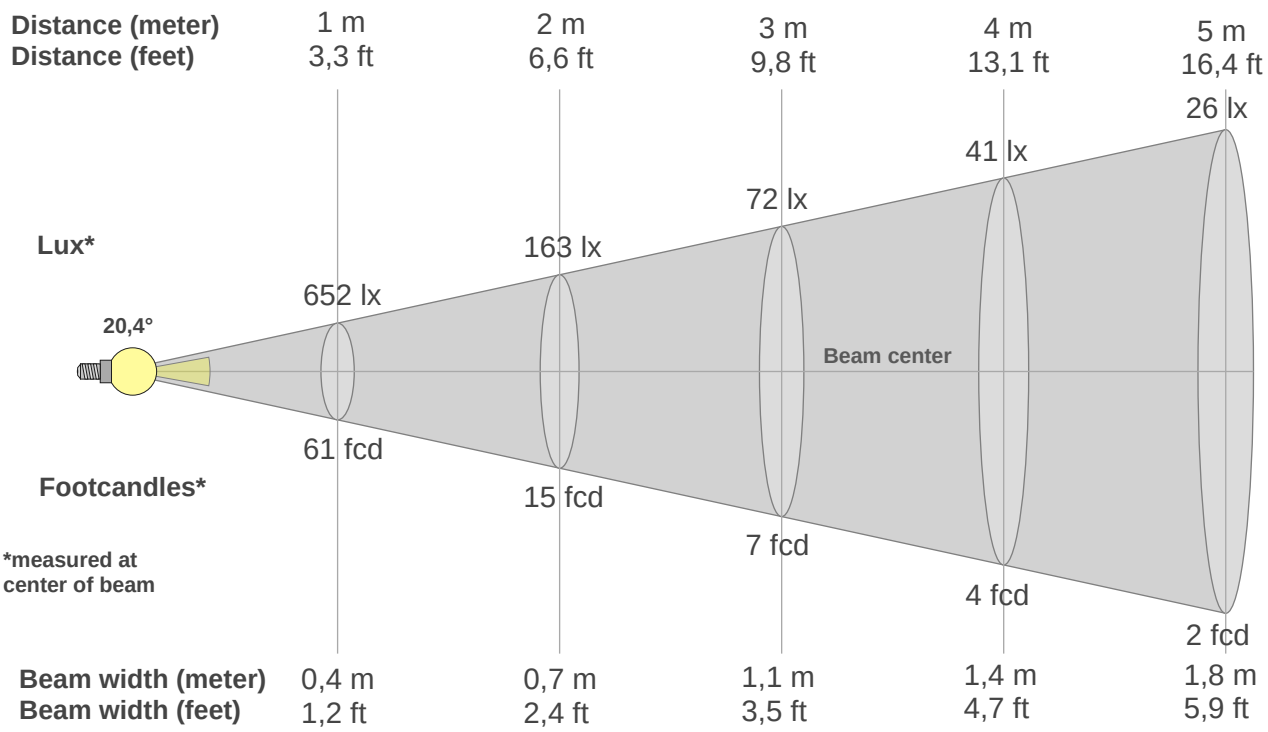

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
652lx	163lx	72lx	41lx	26lx	18lx	13lx	10lx	8lx	7lx	5lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx	2lx
60,6fcd	15,1fcd	6,7fcd	3,8fcd	2,4fcd	1,7fcd	1,2fcd	0,9fcd	0,7fcd	0,6fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
652	781	648	420	275	183	114	77	56	46	39	35	34	29	29	27	24	22	21	18
100%	120%	99%	64%	42%	28%	17%	12%	9%	7%	6%	5%	5%	4%	4%	4%	4%	3%	3%	3%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
652	719	712	705	694	679	662	642	616	588	558	524	489	451	417	378	342	310	277	245
100%	110%	109%	108%	106%	104%	101%	98%	94%	90%	86%	80%	75%	69%	64%	58%	52%	48%	42%	38%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
652	439	301	205	138	96	70	56	44	35	31	26	24	21	20	19	24	23	19	19
100%	67%	46%	31%	21%	15%	11%	9%	7%	5%	5%	4%	4%	3%	3%	3%	4%	4%	3%	3%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
652	724	723	721	718	710	701	689	671	649	623	594	559	522	486	447	408	368	331	297
100%	111%	111%	111%	110%	109%	108%	106%	103%	100%	96%	91%	86%	80%	75%	69%	62%	56%	51%	46%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
20,4°	**51,3°**	**109,8°**	**89,7%**	**75,6%**

ISO candela diagram

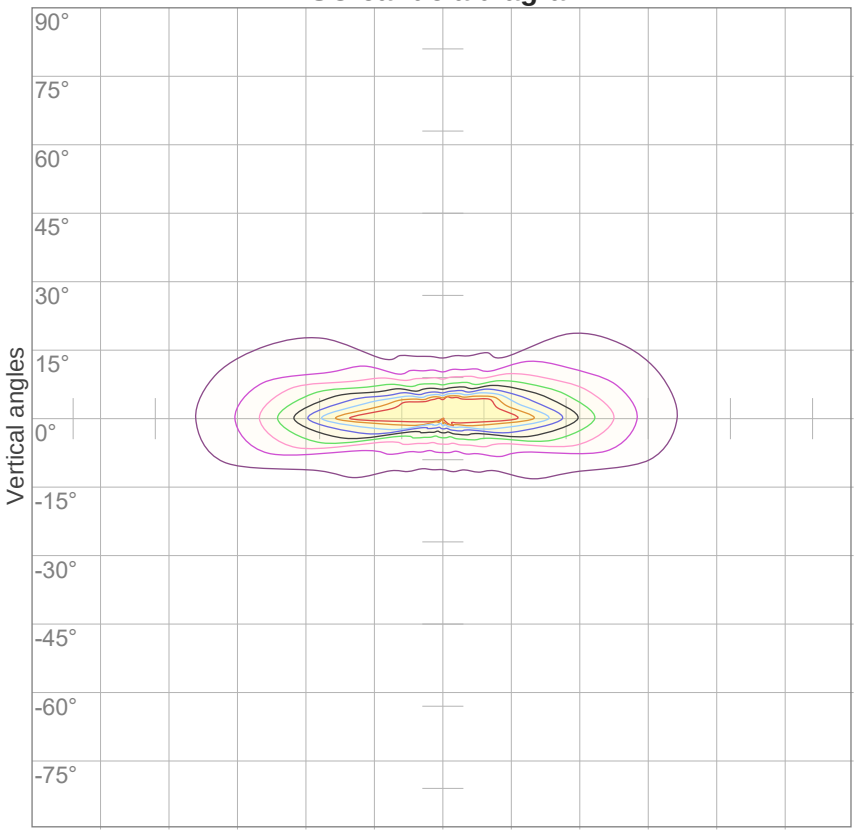


10%	65 cd
20%	130 cd
30%	196 cd
40%	261 cd
50%	326 cd
60%	391 cd
70%	457 cd
80%	522 cd
90%	587 cd

Conditions:

Number of c-planes: 16

Candela at center: 652 cd

ISO lux diagram

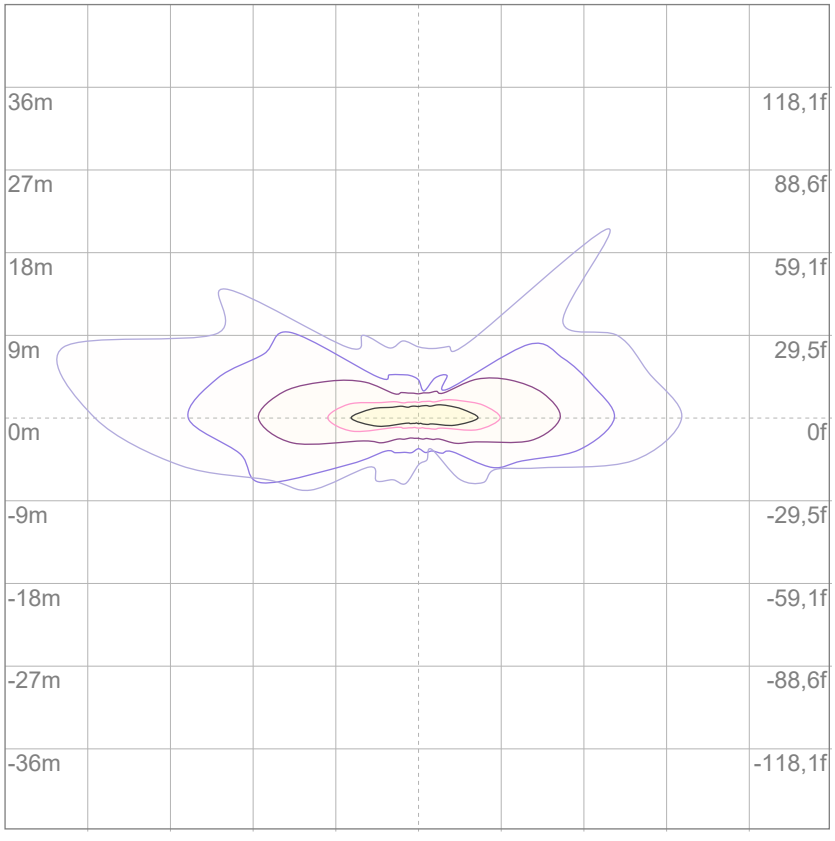

Mounting height: 10 meters (33 feet)

3%	0,196 lx
5%	0,326 lx
10%	0,652 lx
30%	1,96 lx
50%	3,26 lx

Conditions:

Number of c-planes: 16

Lux at center: 6,52 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare Evaluation According to UGR


p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Variation of the observer position for the luminaire distance S										
n/a	n/a					n/a				
n/a	n/a					n/a				
n/a	n/a					n/a				
Standard table	n/a					n/a				
Correction summand	n/a					n/a				
Corrected glare indices referring to 301 lm total luminous flux										

UGR data could not be calculated due to missing/wrong symmetry. Go to Edit -> Photometric -> Corrections and select Correct asymmetry (UGR not defined for asymmetrical distributions)..

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93	94	92	91	89
2	104	98	92	88	102	96	91	87	92	88	85	89	86	83	86	84	81	79
3	97	89	83	78	95	88	82	77	85	80	76	82	78	75	80	76	73	72
4	91	82	75	70	89	81	74	70	79	73	69	76	72	68	74	70	67	65
5	86	76	69	64	84	75	68	63	73	67	63	71	66	62	70	65	62	60
6	81	71	64	59	80	70	63	58	68	62	58	67	61	57	65	61	57	55
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	62	57	53	51
8	73	62	55	51	72	61	55	50	60	54	50	59	54	50	58	53	50	48
9	69	59	52	47	68	58	52	47	57	51	47	56	51	47	55	50	47	45
10	66	55	49	45	65	55	49	45	54	48	44	53	48	44	52	48	44	43

Luminaire budgetary diagram

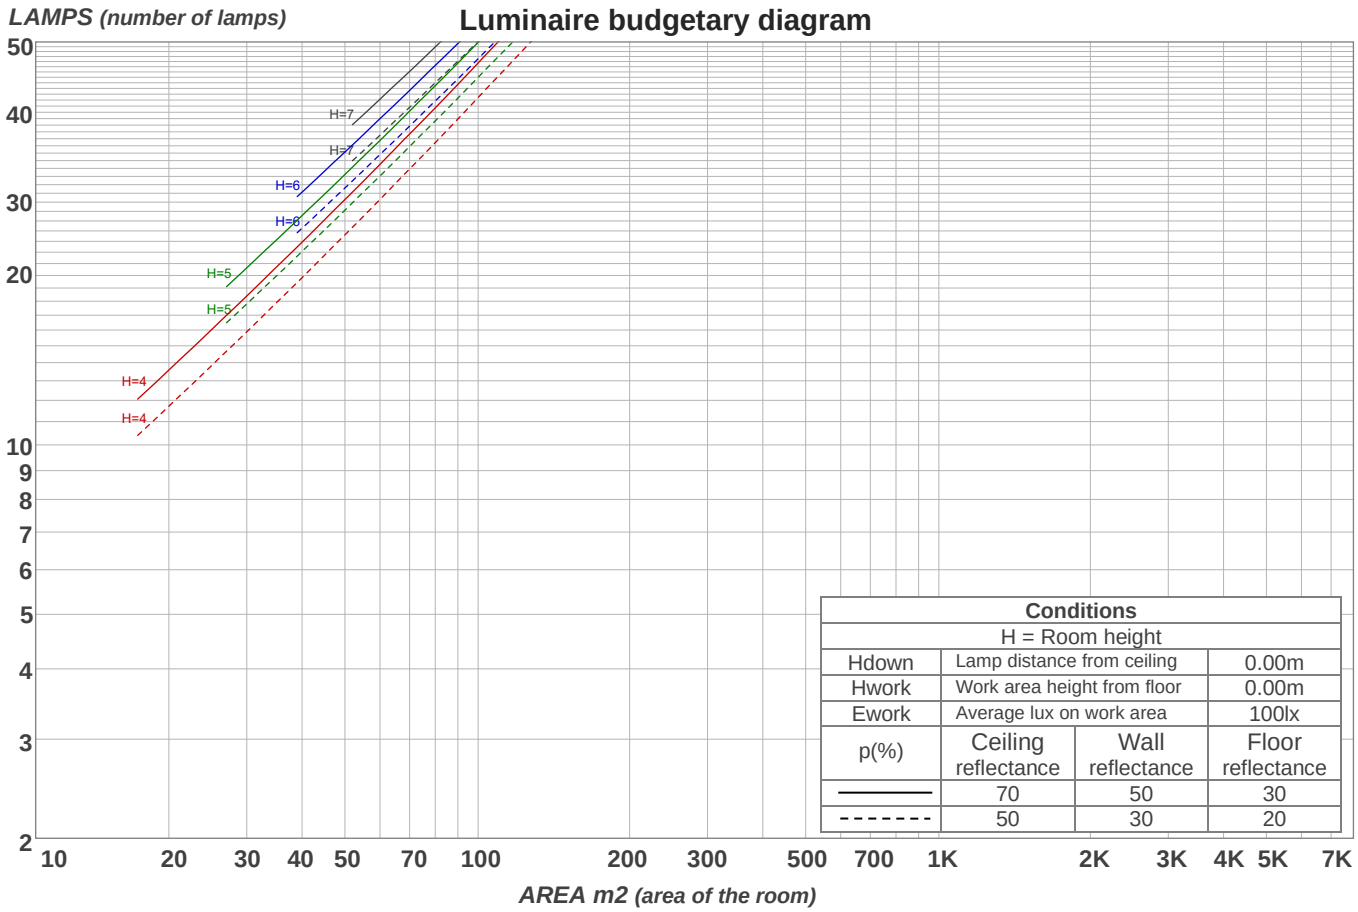


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
43,1 lm	60,8 lm	56,0 lm	47,8 lm	37,0 lm	25,3 lm	15,2 lm	9,26 lm	6,57 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,021 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm

Warmup curve

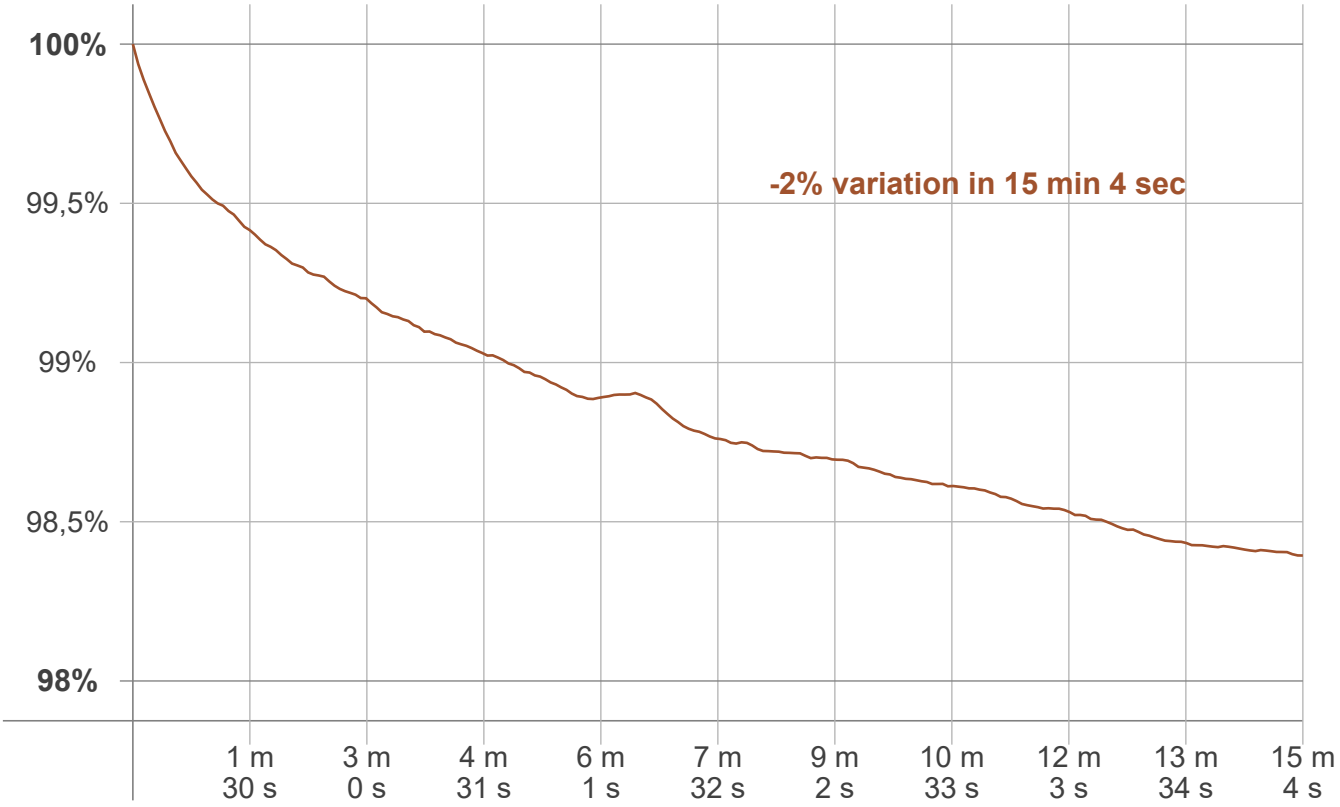

Warmup result

Warmup time:	**Lamp stabilized in 15 min 4 sec**
Warmup variation	**-2,0%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
0 K	0 K	0 K

Output change

Output start	Output change	Output end
306 lm	-5 lm	301 lm