

Light efficiency:

113 Lumen/Watt

Light quality:

CRI: 83,7

Color temperature:

4051 K

Output: 925 lm

Peak: 343 cd

Power: 8,2 W

PF: 1,0



Product name:

Pegasus-3-Gold-0508-840-CFF

Item number:

FLNP-L-16A-0508-840-CFF

Date and time:

23.02.2021 09:57:41

Description:

Rank: S15ZT

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 Grad K

CRI +/-0,7

Angular Resolution 1 Grad step


Last Calibration 20-05-2020

Pruefer: Peter Ulrich

Pruefort: Lichtlabor

Gaustrasse13-15

55411 Bingen am Rhein

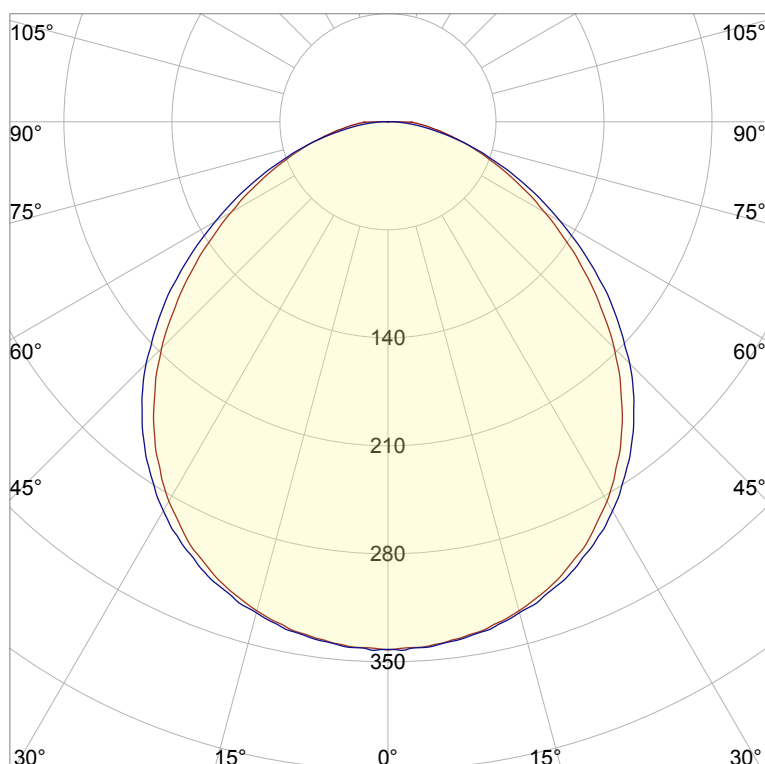


CIE 1931


x: 0,379



y: 0,376

Spectra

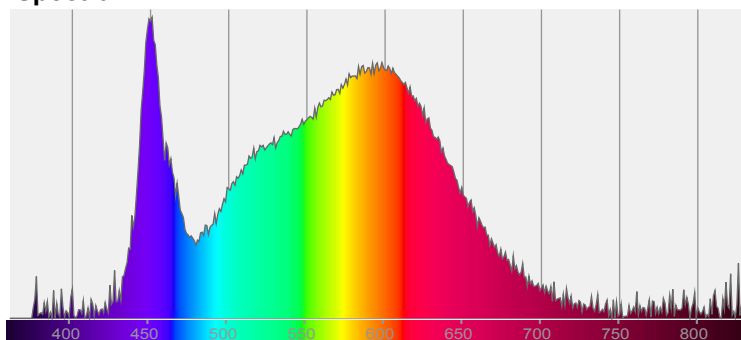


Power

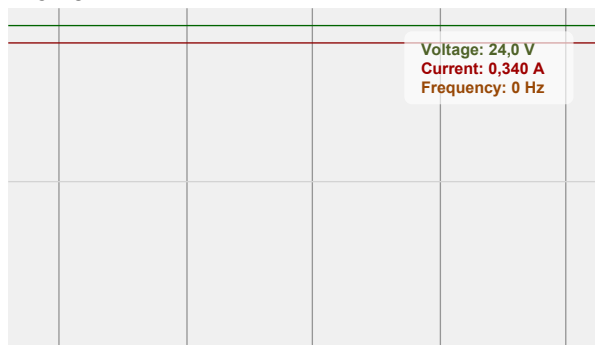


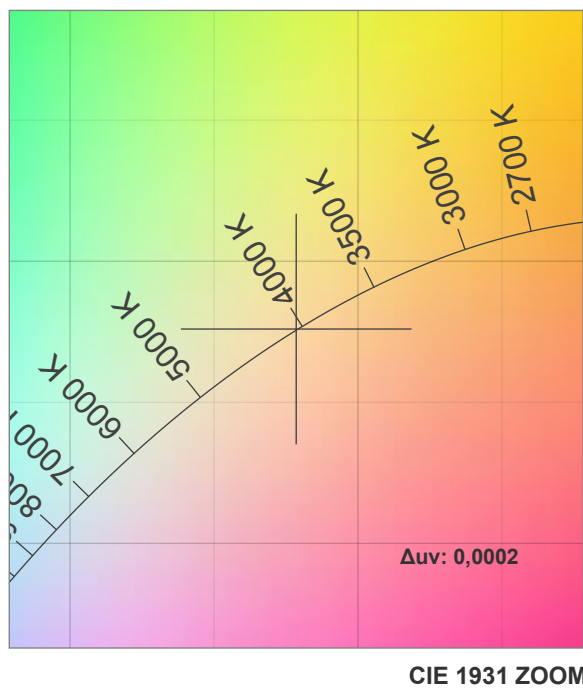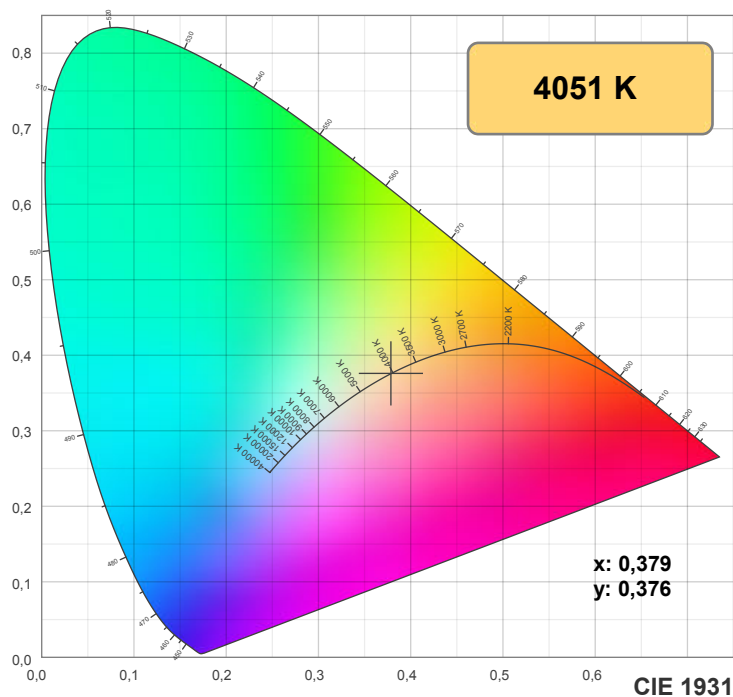

TM30: 84,6

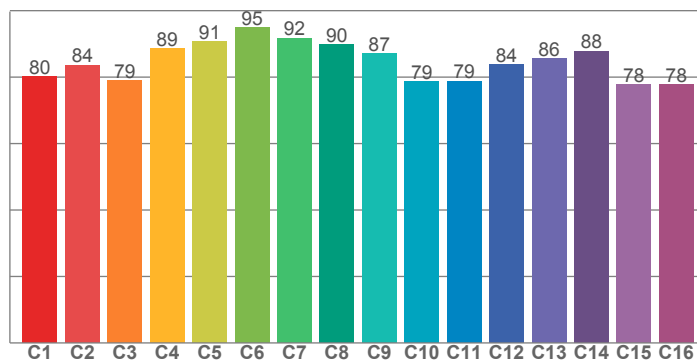

CRI: 83,7 (R1-R8)

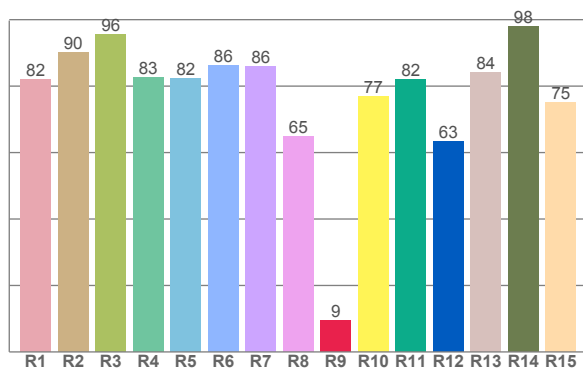

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82,1	90,2	95,7	82,6	82,2	86,3	85,9	64,8	9,5	76,8	82,0	63,3	84,3	98,0	75,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
80,2	83,6	78,9	88,6	90,7	94,9	91,8	89,9	87,0	78,7	78,8	83,7	85,6	87,8	77,7	77,7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
81,3	98,2	80,0	76,7	81,8	83,8	85,7	89,0	97,8	89,5	85,7	83,9	83,2	71,9	75,3

CQS: 82,7

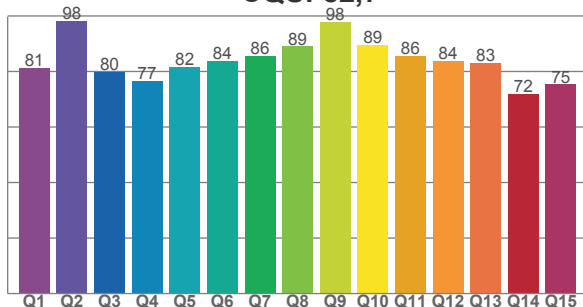

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
4051 K	83,7	9,5	84,6	95,3	82,7	0,379	0,376	0,224	0,334	0,0002







Rf 84,6


Fidelity index Rf

Rg 95,3

Gamut index Rg

Hue Bin	Rf	Graphic shifts (%)	
		Chroma	Hue
1	80	-12%	0%
2	84	-7%	6%
3	79	-4%	11%
4	89	0%	6%
5	91	0%	3%
6	95	1%	-2%
7	92	-4%	-3%
8	90	-6%	0%
9	87	-6%	7%
10	79	-6%	12%
11	79	3%	14%
12	84	6%	6%
13	86	7%	-7%
14	88	5%	-7%
15	78	-1%	-17%
16	78	-6%	-13%

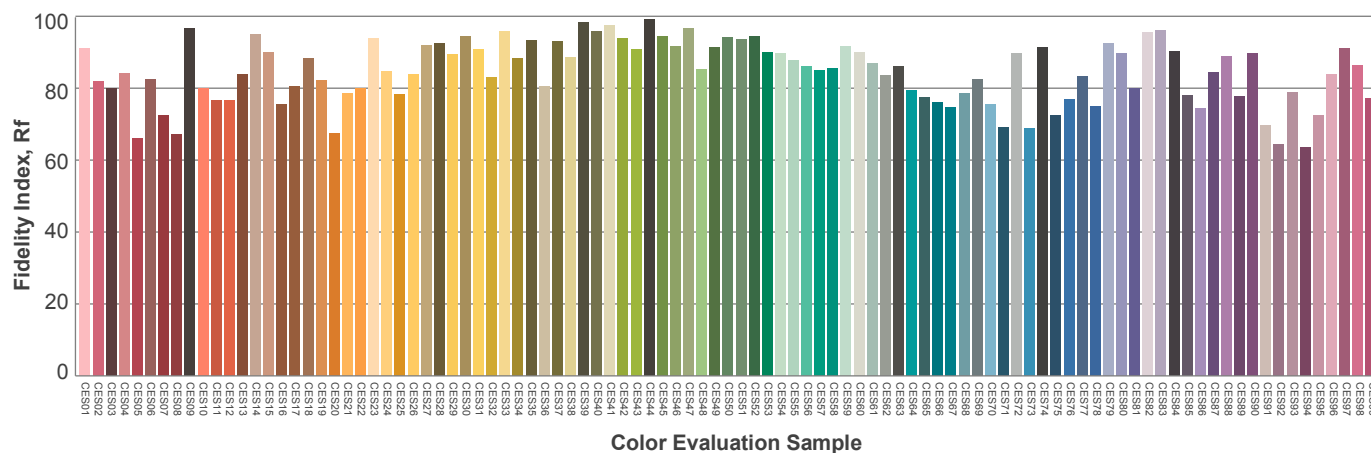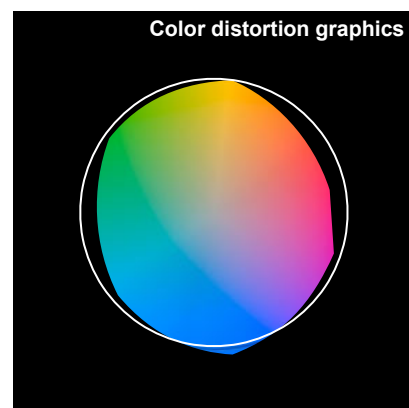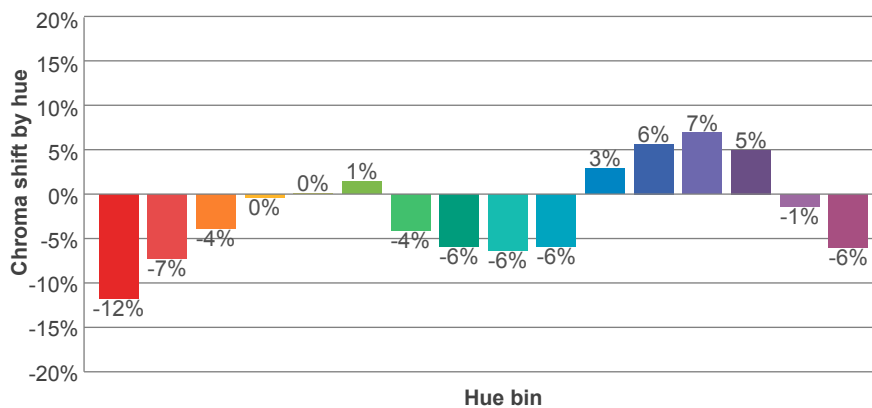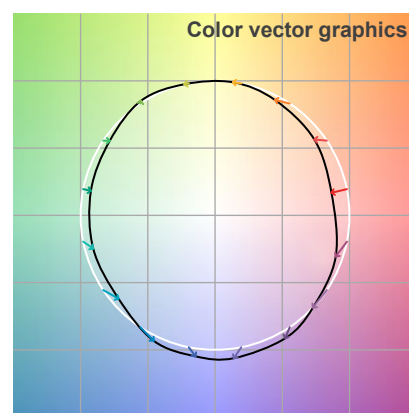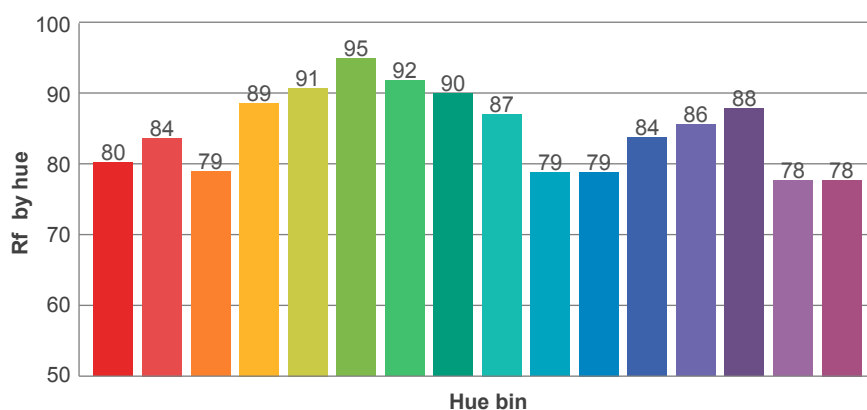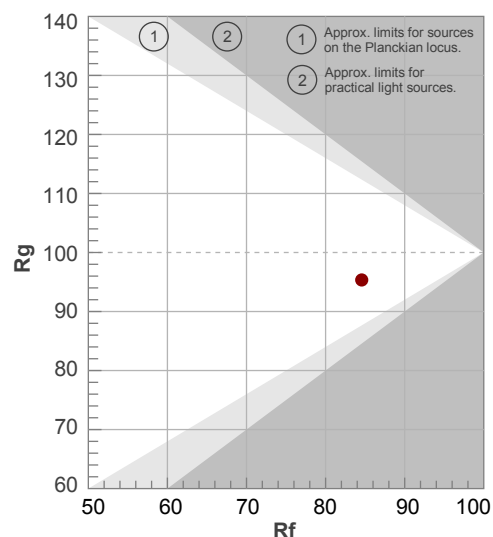

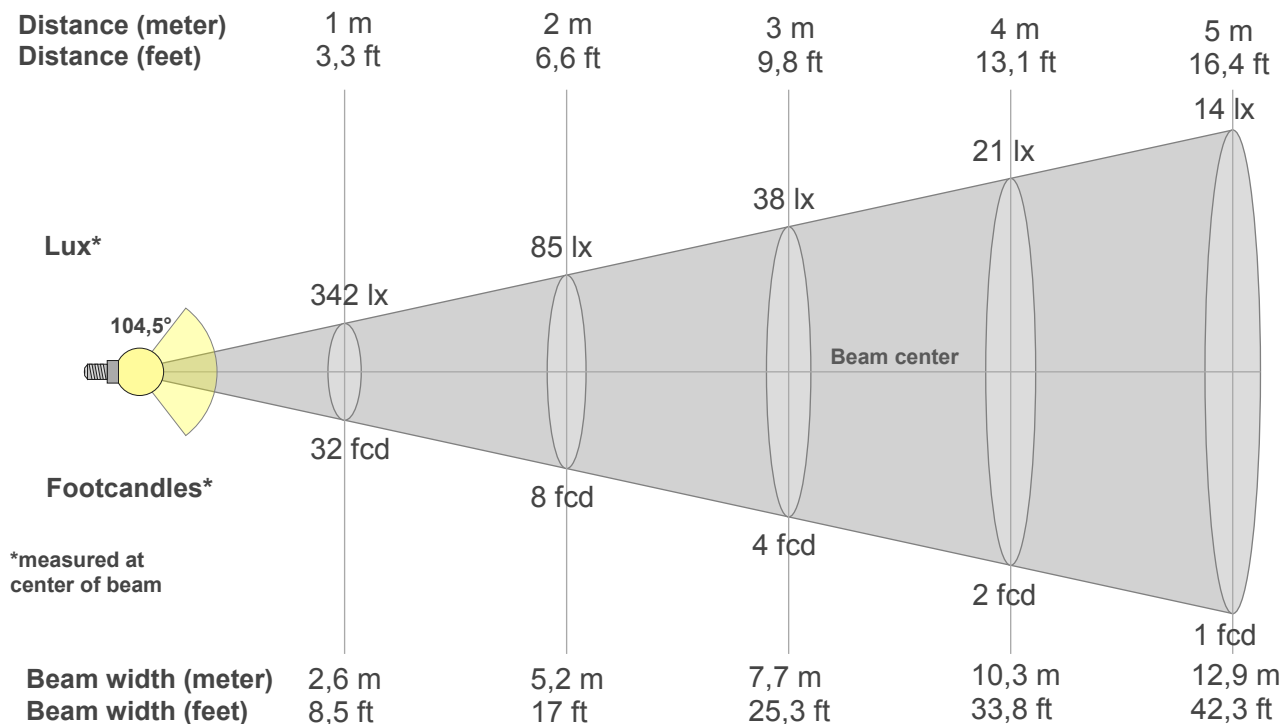

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
342lx	85lx	38lx	21lx	14lx	9lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
31,8fcd	7,9fcd	3,5fcd	2fcd	1,3fcd	0,9fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
342	340	336	328	317	303	284	262	235	207	177	147	117	92	69	49	34	22	9	8
100%	99%	98%	96%	93%	89%	83%	77%	69%	61%	52%	43%	34%	27%	20%	14%	10%	6%	3%	2%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
342	341	336	329	320	307	291	271	248	222	192	160	129	100	72	49	28	13	2	2
100%	100%	98%	96%	94%	90%	85%	79%	72%	65%	56%	47%	38%	29%	21%	14%	8%	4%	1%	1%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
342	340	336	328	317	303	284	262	235	207	177	147	117	92	69	49	34	22	9	8
100%	99%	98%	96%	93%	89%	83%	77%	69%	61%	52%	43%	34%	27%	20%	14%	10%	6%	3%	2%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
342	341	336	329	320	307	291	271	248	222	192	160	129	100	72	49	28	13	2	2
100%	100%	98%	96%	94%	90%	85%	79%	72%	65%	56%	47%	38%	29%	21%	14%	8%	4%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
104,5°	159°	179,6°	79,6%	55,9%

ISO candela diagram

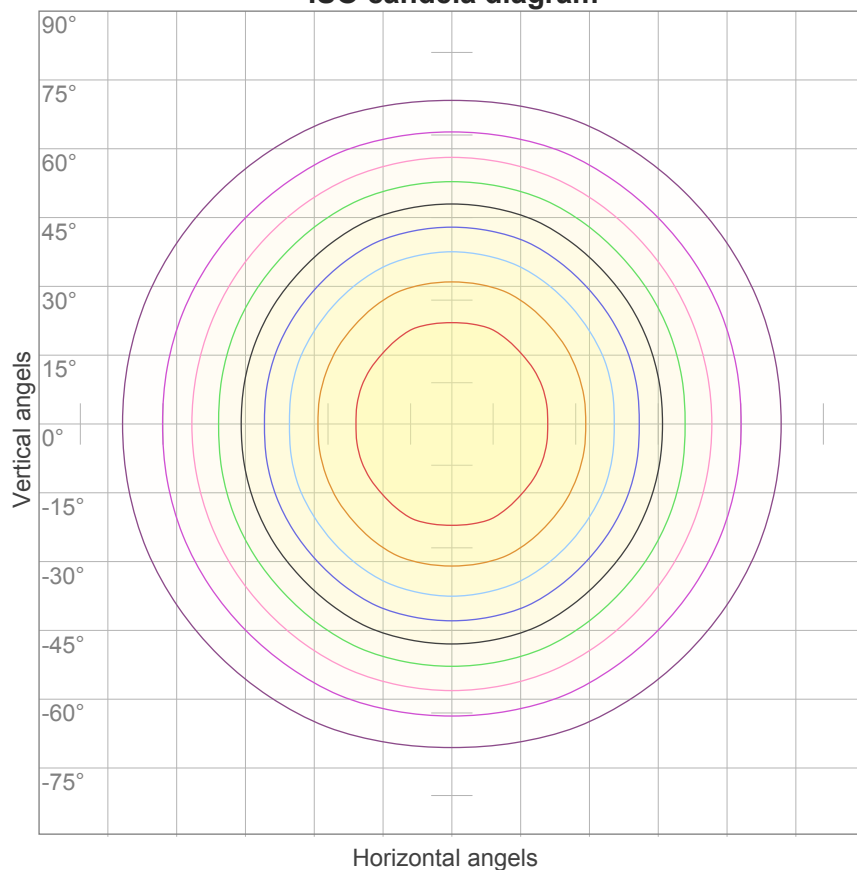


10%	34 cd
20%	68 cd
30%	103 cd
40%	137 cd
50%	171 cd
60%	205 cd
70%	239 cd
80%	274 cd
90%	308 cd

Conditions:

Number of c-planes: 16

Candela at center: 342 cd

ISO lux diagram

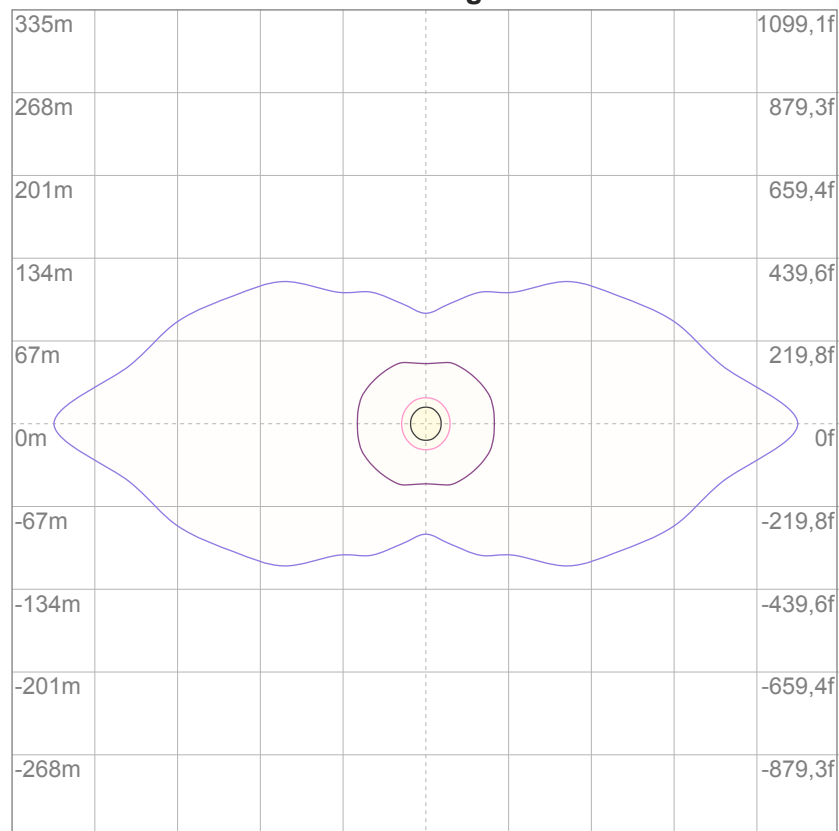

3%	0,103 lx
5%	0,171 lx
10%	0,342 lx
30%	1,03 lx
50%	1,71 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,42 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	22,3	23,5	22,6	23,8	24,0	23,3	24,4	23,5	24,8	25,0
	3H	23,3	24,5	23,7	24,8	25,0	24,4	25,7	24,8	25,9	26,1
	4H	23,7	24,9	24,1	25,2	25,4	24,9	26,1	25,3	26,4	26,6
	6H	24,1	25,2	24,4	25,4	25,8	25,3	26,3	25,6	26,6	27,0
	8H	24,2	25,2	24,6	25,5	25,9	25,4	26,4	25,8	26,7	27,1
	12H	24,3	25,3	24,7	25,6	26,1	25,5	26,4	25,8	26,8	27,2
4H	2H	22,9	24,0	23,3	24,3	24,6	23,6	24,8	24,0	25,1	25,3
	3H	24,2	25,1	24,5	25,5	25,9	25,1	26,0	25,4	26,4	26,8
	4H	24,6	25,5	25,1	25,9	26,5	25,6	26,5	26,1	26,9	27,5
	6H	25,0	25,9	25,5	26,2	26,6	26,1	26,9	26,6	27,3	27,6
	8H	25,2	26,0	25,7	26,3	26,7	26,2	27,0	26,7	27,4	27,7
	12H	25,3	26,0	25,8	26,4	26,9	26,3	27,0	26,8	27,4	27,9
8H	4H	24,9	25,6	25,4	26,0	26,4	25,8	26,5	26,3	26,9	27,3
	6H	25,4	26,0	25,9	26,5	27,0	26,4	27,0	26,9	27,4	28,0
	8H	25,7	26,2	26,2	26,7	27,4	26,6	27,1	27,1	27,6	28,3
	12H	25,9	26,4	26,5	26,9	27,5	26,8	27,2	27,4	27,7	28,3
12H	4H	24,9	25,5	25,4	25,9	26,4	25,8	26,4	26,3	26,8	27,3
	6H	25,5	26,0	26,0	26,5	27,2	26,4	26,9	26,9	27,4	28,1
	8H	25,8	26,2	26,4	26,7	27,3	26,7	27,1	27,2	27,6	28,2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,1 / -0,1				
S = 1.5H		0,3 / -0,4					0,2 / -0,3				
S = 2.0H		0,7 / -0,9					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 925 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	104	100	96	106	101	98	94	97	94	91	93	90	88	89	87	85	82
2	99	91	84	79	96	89	83	78	85	80	76	81	77	73	78	75	72	69
3	91	80	72	66	88	78	71	65	75	69	64	72	67	62	69	65	61	59
4	83	71	63	56	81	70	62	56	67	60	55	65	59	54	62	57	53	51
5	76	64	55	49	74	63	54	48	60	53	48	58	52	47	56	51	46	44
6	71	58	49	43	69	57	48	42	55	47	42	53	46	41	51	45	41	39
7	66	52	44	38	64	51	43	38	50	42	37	48	42	37	47	41	36	34
8	61	48	39	34	59	47	39	34	46	38	33	44	38	33	43	37	33	31
9	57	44	36	30	56	43	36	30	42	35	30	41	34	30	40	34	29	28
10	54	41	33	28	52	40	33	27	39	32	27	38	31	27	37	31	27	25

LAMPS (number of lamps)


Luminaire budgetary diagram

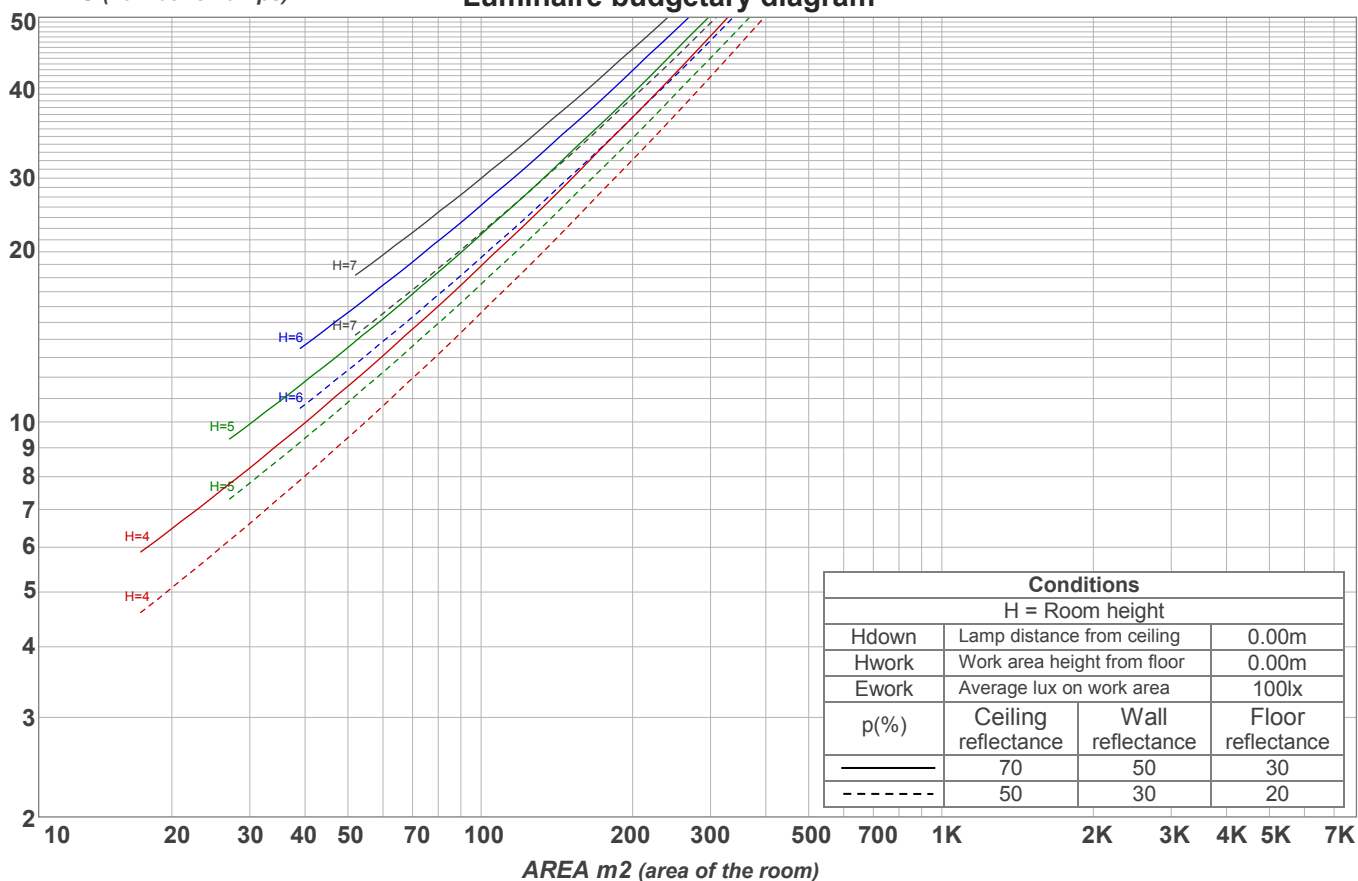

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
32,4 lm	92,8 lm	140 lm	167 lm	165 lm	138 lm	95,8 lm	53,6 lm	21,0 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
6,26 lm	3,21 lm	2,79 lm	2,52 lm	1,56 lm	0,900 lm	0,663 lm	0,406 lm	0,137 lm

Warmup curve

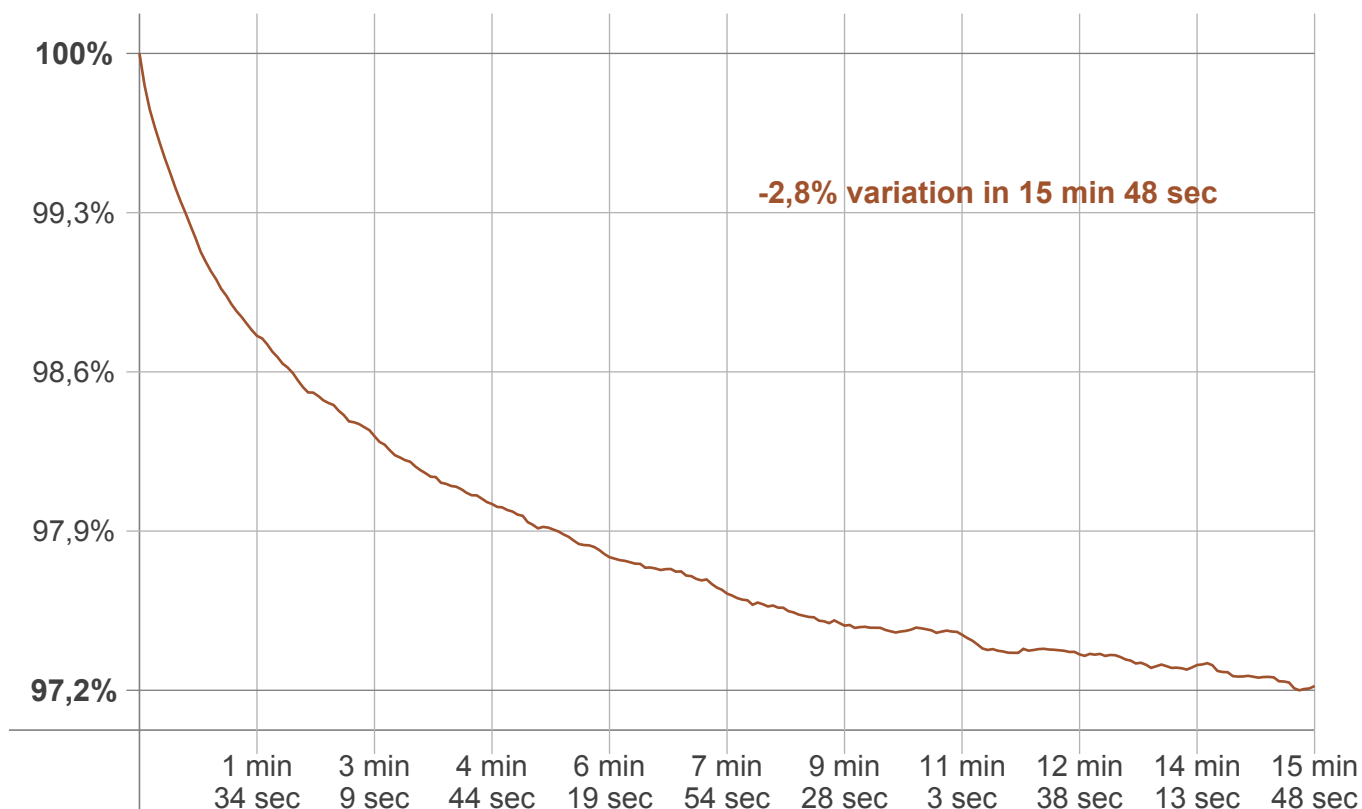

Warmup result

Warmup time:	15 min 48 sec
Warmup variation	-2,8%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
4032 K	+19 K	4051 K

Output change

Output start	Output change	Output end
946 lm	-21 lm	925 lm