

Light efficiency:

49 Lumen/Watt

Light quality:

CRI: 0,0

Color temperature:


0 K

Output: 403 lm

Peak: 629 cd


Power: 8,2 W

PF: 1,0

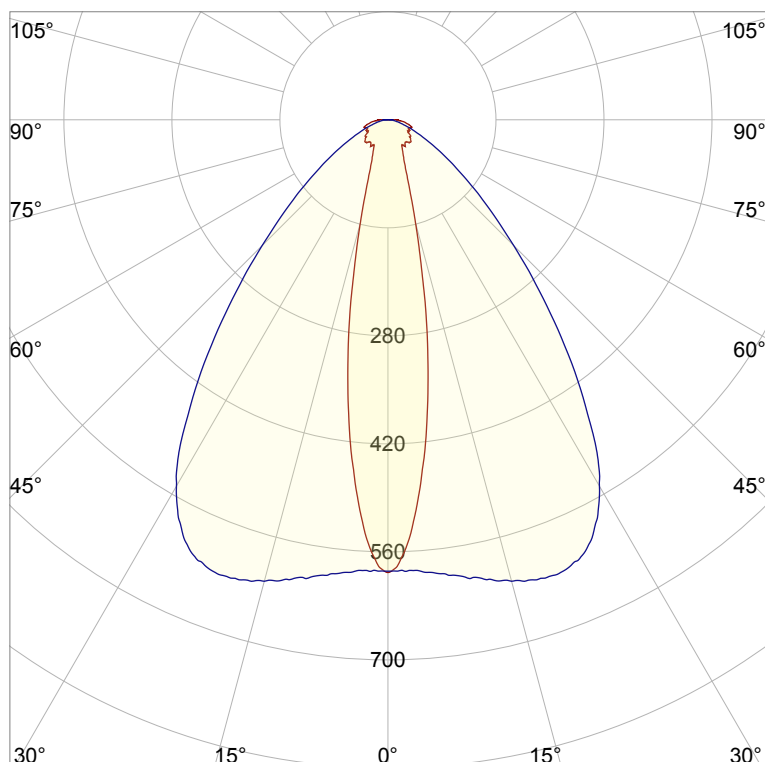


CIE 1931
x: 0,676
y: 0,300

Spectra

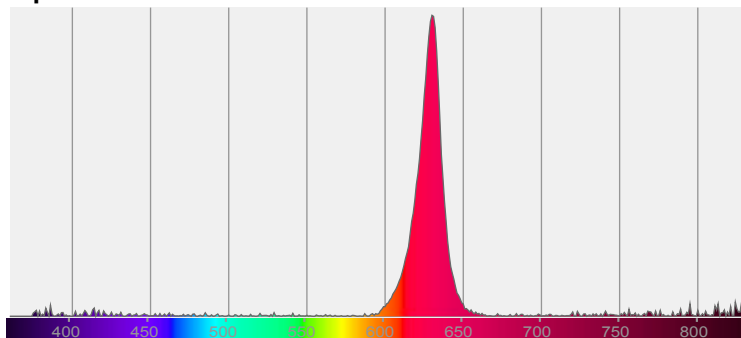

Power

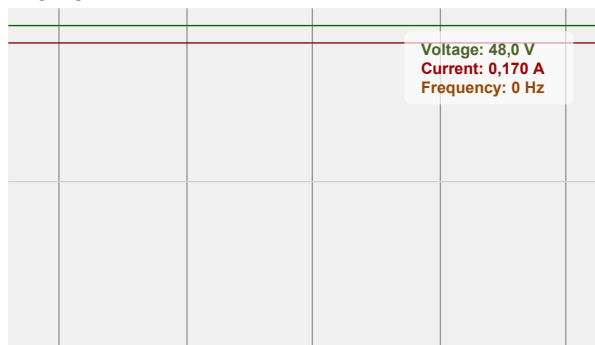

Product name:

Defiant-0508-XXR-L1F

Item number:

FLNP/L22A0508/XXR/L1F

Date and time:

08.07.2020 14:41:34

Description:

Rank: R2G2B4/RC2GA2BA5/A

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 K

CRI +/-0,7

Angular Resolution 1 Grad Step

Last Calibration 20.05.2020

Pruefer:



Peter Ulrich

Pruefort:

Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein

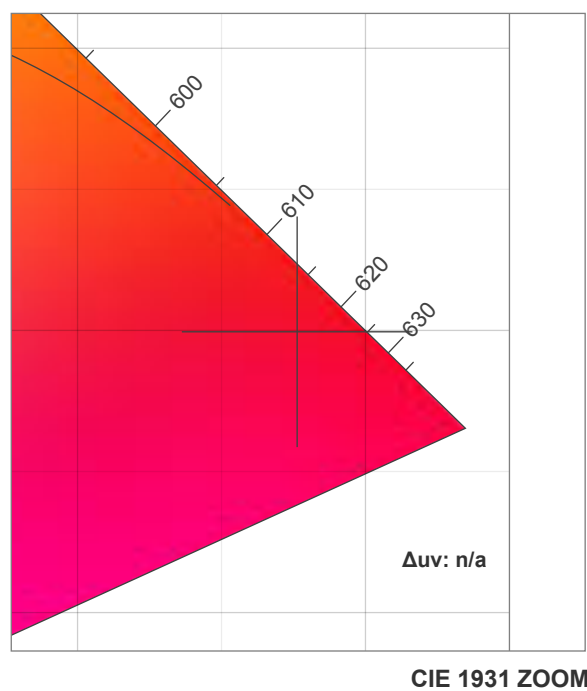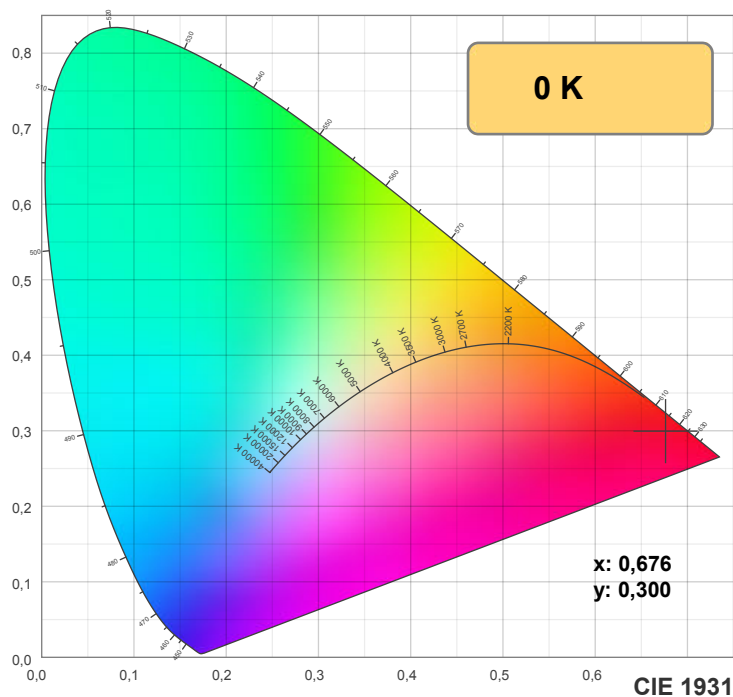

TM30: 0,0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	

CRI: 0,0 (R1-R8)

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15		

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0	0,0

CQS: 0,0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15		

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0,0	0,0	0,0	0,0	0,0	0,676	0,300	0,516	0,343	n/a




Rf 0,0


Fidelity index Rf

Rg 0,0

Gamut index Rg

		Graphic shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

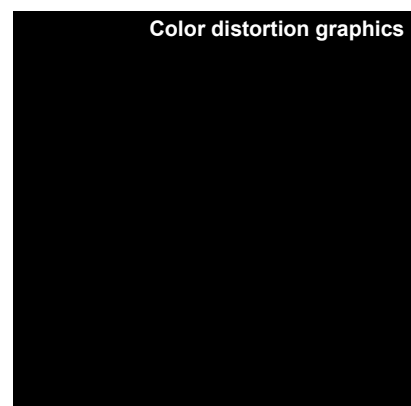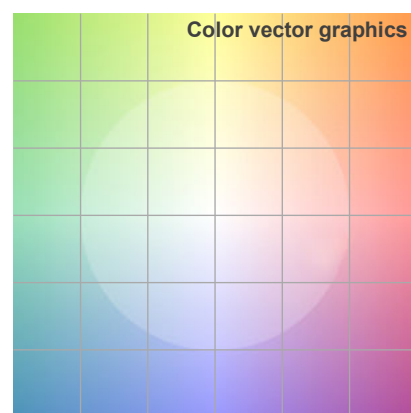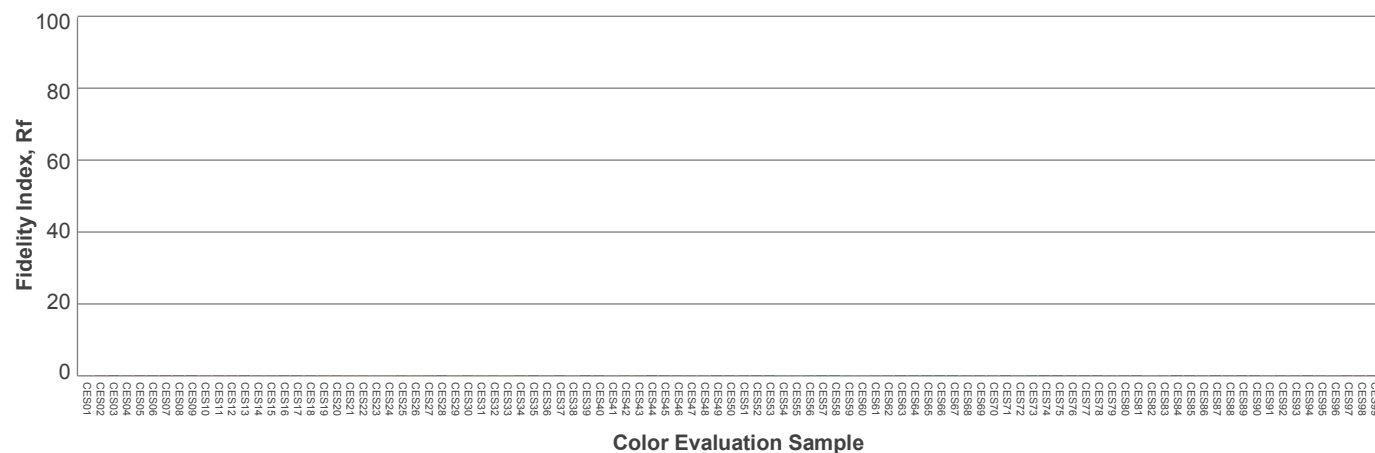

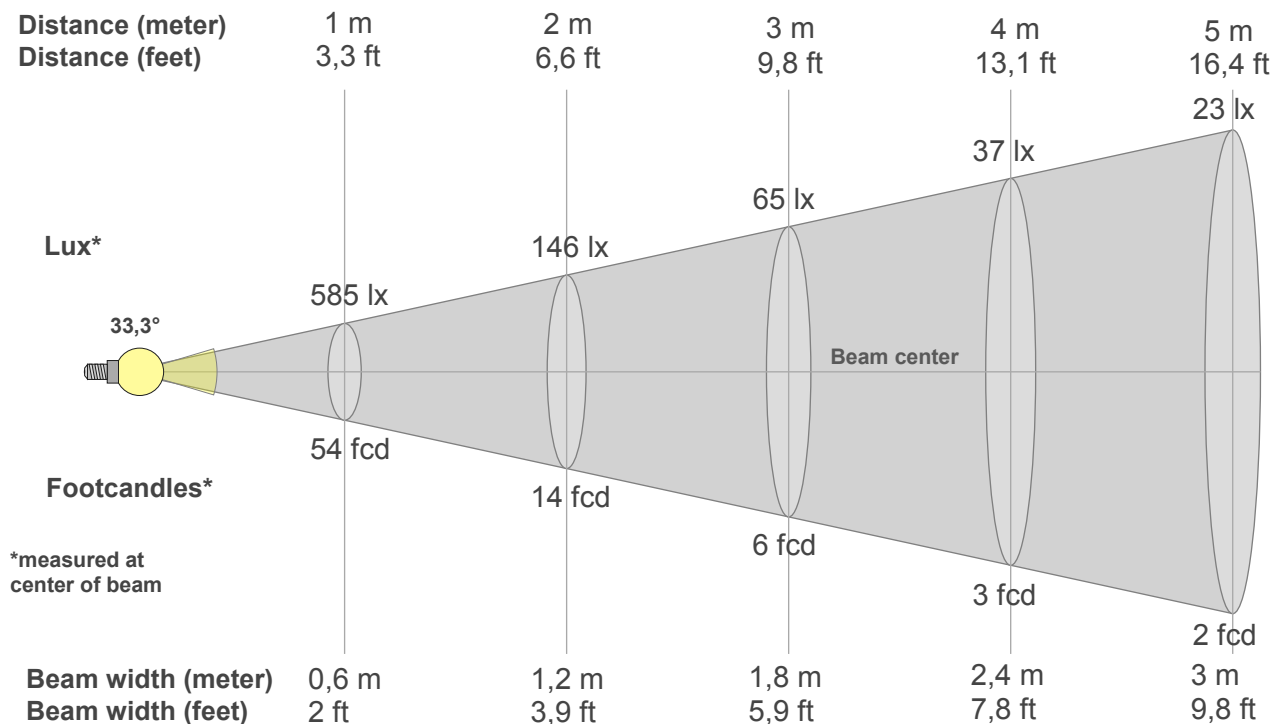

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
585lx	146lx	65lx	37lx	23lx	16lx	12lx	9lx	7lx	6lx	5lx	4lx	3lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx
54,3fcd	13,6fcd	6fcd	3,4fcd	2,2fcd	1,5fcd	1,1fcd	0,8fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
585	564	511	444	370	296	222	162	117	85	66	55	48	42	38	38	39	39	37	37
100%	96%	87%	76%	63%	51%	38%	28%	20%	15%	11%	9%	8%	7%	7%	7%	7%	7%	6%	6%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
585	585	586	591	596	603	609	615	621	627	628	626	618	603	579	548	512	465	419	372
100%	100%	100%	101%	102%	103%	104%	105%	106%	107%	107%	107%	106%	103%	99%	94%	88%	79%	72%	64%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
585	564	511	444	370	296	222	162	117	85	66	55	48	42	38	38	39	39	37	37
100%	96%	87%	76%	63%	51%	38%	28%	20%	15%	11%	9%	8%	7%	7%	7%	7%	7%	6%	6%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
585	585	586	591	596	603	609	615	621	627	628	626	618	603	579	548	512	465	419	372
100%	100%	100%	101%	102%	103%	104%	105%	106%	107%	107%	107%	106%	103%	99%	94%	88%	79%	72%	64%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
33,3°	64,5°	164°	84,5%	69,7%

ISO candela diagram

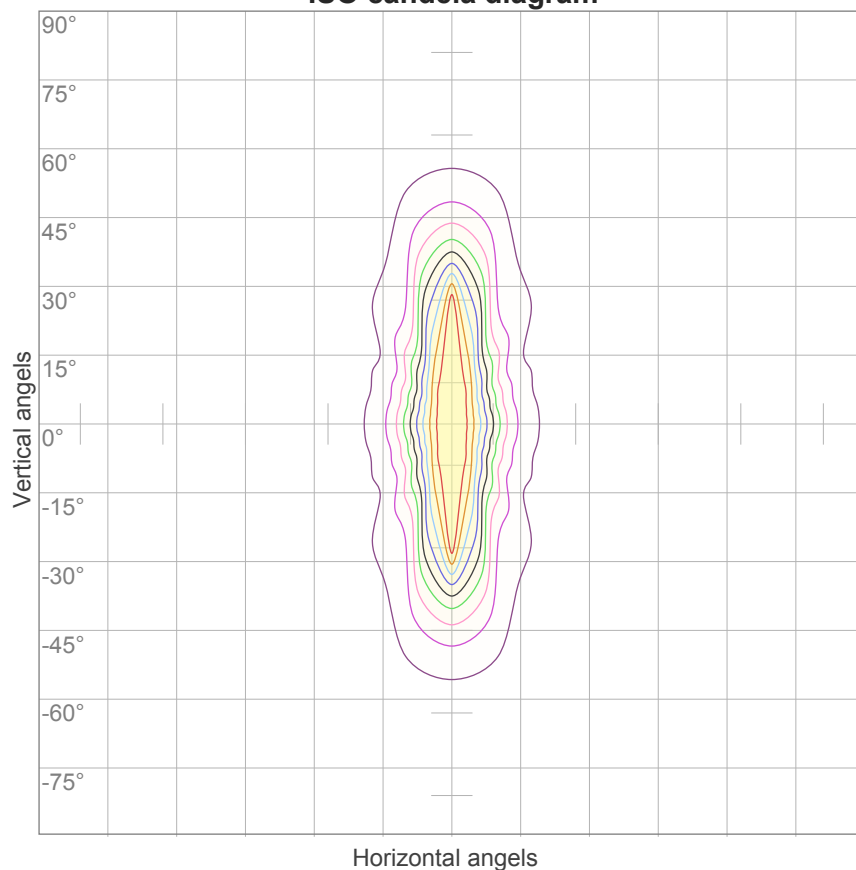


10%	58 cd
20%	117 cd
30%	175 cd
40%	234 cd
50%	292 cd
60%	351 cd
70%	409 cd
80%	468 cd
90%	526 cd

Conditions:

Number of c-planes: 16

Candela at center: 585 cd

ISO lux diagram

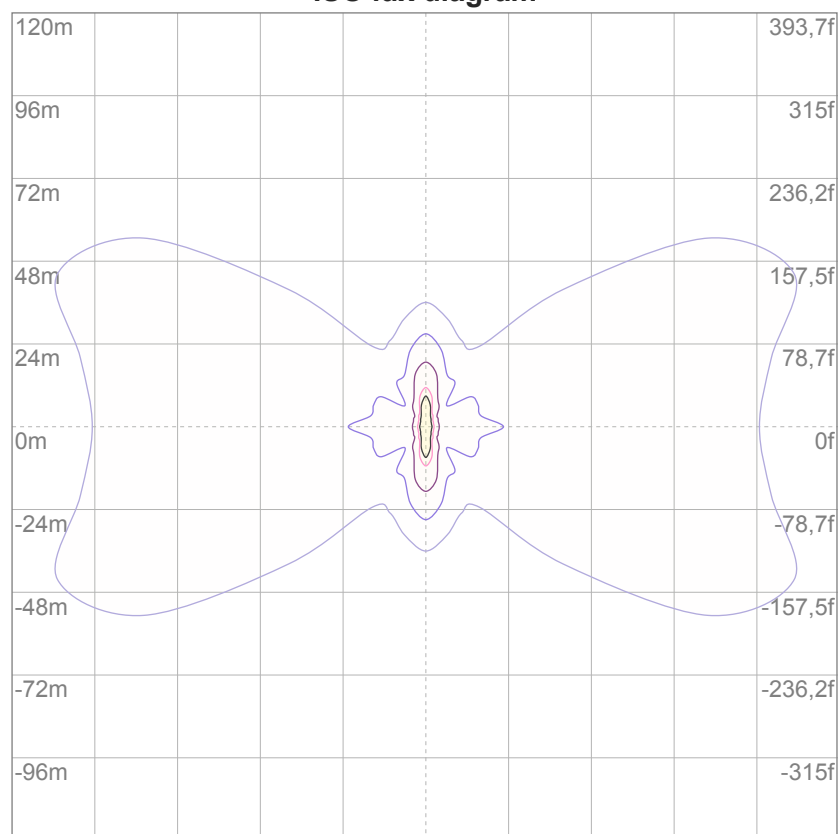

3%	0,175 lx
5%	0,292 lx
10%	0,585 lx
30%	1,75 lx
50%	2,92 lx

Conditions:

Number of c-planes: 16

Lux at center: 5,85 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	13,1	14,1	13,3	14,4	14,6	20,1	21,1	20,3	21,3	21,5
	3H	15,4	16,5	15,8	16,7	16,9	20,6	21,7	21,0	21,9	22,1
	4H	16,9	17,9	17,3	18,2	18,4	20,9	21,9	21,3	22,1	22,4
	6H	18,1	19,0	18,4	19,3	19,6	21,1	22,0	21,4	22,3	22,7
	8H	18,5	19,4	18,9	19,7	20,1	21,2	22,1	21,5	22,4	22,8
	12H	18,8	19,7	19,2	20,0	20,5	21,3	22,1	21,6	22,5	22,9
4H	2H	13,7	14,7	14,1	14,9	15,2	19,9	20,9	20,3	21,1	21,4
	3H	16,4	17,2	16,7	17,6	18,0	20,6	21,5	21,0	21,8	22,3
	4H	18,0	18,7	18,4	19,2	19,7	20,9	21,7	21,3	22,1	22,6
	6H	19,3	20,1	19,8	20,4	20,8	21,2	22,0	21,7	22,3	22,7
	8H	19,8	20,5	20,3	20,9	21,3	21,4	22,1	21,9	22,4	22,8
	12H	20,2	20,8	20,7	21,2	21,7	21,5	22,1	22,0	22,5	23,0
8H	4H	18,3	19,0	18,8	19,4	19,8	21,0	21,7	21,5	22,1	22,4
	6H	19,9	20,4	20,4	20,9	21,4	21,4	22,0	21,9	22,4	23,0
	8H	20,6	21,1	21,1	21,6	22,2	21,7	22,2	22,2	22,7	23,3
	12H	21,1	21,5	21,7	22,0	22,7	21,9	22,3	22,5	22,8	23,4
12H	4H	18,4	19,0	18,9	19,4	19,8	21,0	21,6	21,5	22,0	22,5
	6H	20,1	20,5	20,6	21,0	21,7	21,5	22,0	22,1	22,5	23,2
	8H	20,8	21,2	21,4	21,7	22,3	21,8	22,2	22,4	22,7	23,3
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,0 / 0,0					1,2 / -1,2				
S = 1.5H		0,1 / -0,1					2,8 / -1,8				
S = 2.0H		0,3 / -0,2					4,2 / -2,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 403 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86
2	102	95	89	84	99	93	88	83	89	85	81	86	83	79	83	80	77	75
3	95	86	79	73	93	84	78	73	82	76	72	79	74	70	76	73	69	67
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63	71	66	63	61
5	83	72	65	59	81	71	64	59	69	63	58	67	62	58	66	61	57	55
6	78	67	59	54	77	66	59	54	64	58	53	63	57	53	61	56	53	51
7	74	62	55	50	72	62	55	50	60	54	49	59	53	49	58	53	49	47
8	70	58	51	46	69	58	51	46	57	50	46	55	50	46	54	49	45	44
9	66	55	48	43	65	54	48	43	53	47	43	52	47	43	51	46	43	41
10	63	52	45	40	62	51	45	40	50	44	40	50	44	40	49	44	40	39

LAMPS (number of lamps)


Luminaire budgetary diagram

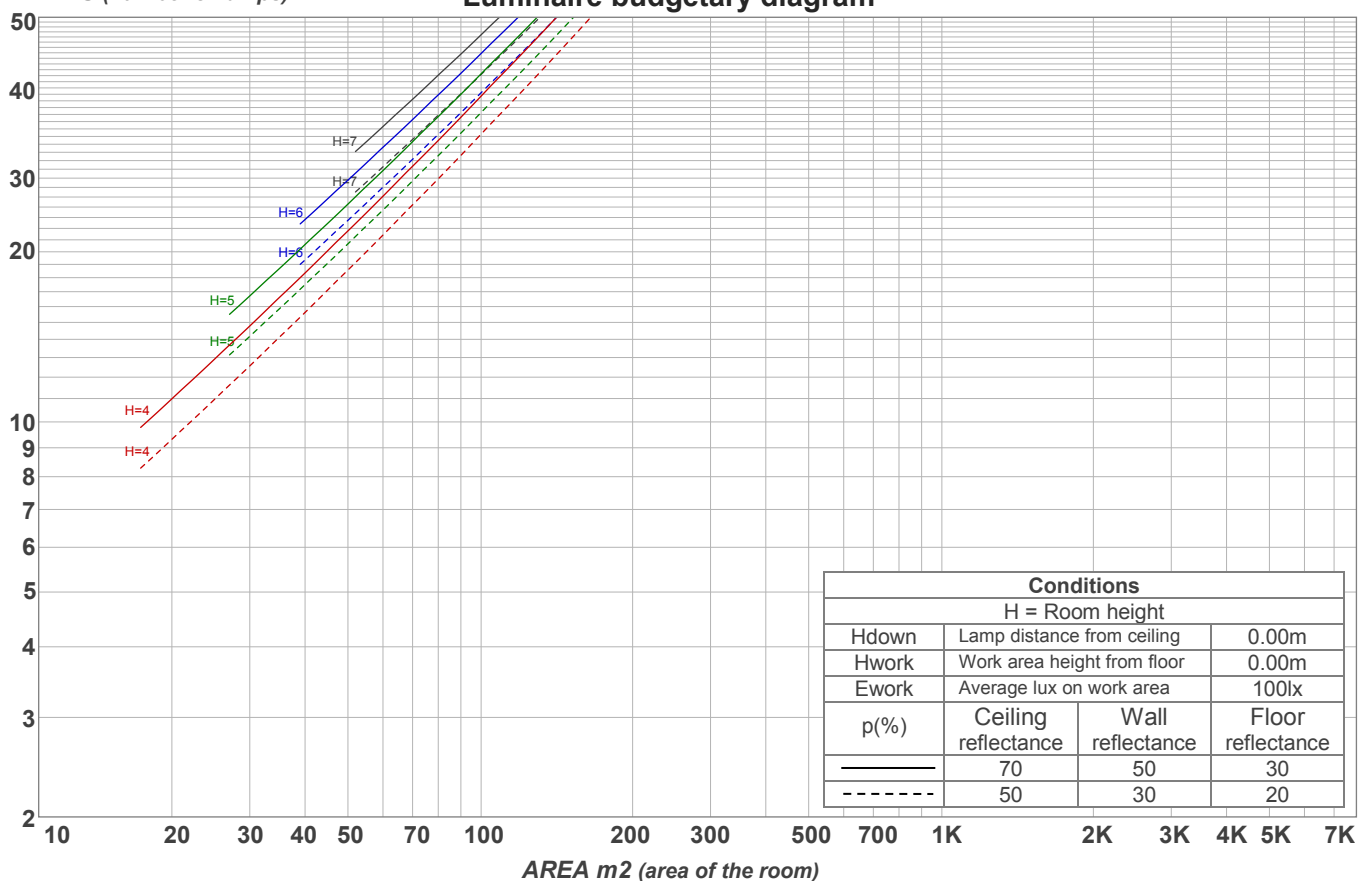

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
46,2 lm	77,8 lm	70,2 lm	61,3 lm	48,6 lm	36,7 lm	26,1 lm	21,6 lm	15,0 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,041 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm	0,000 lm

Warmup curve

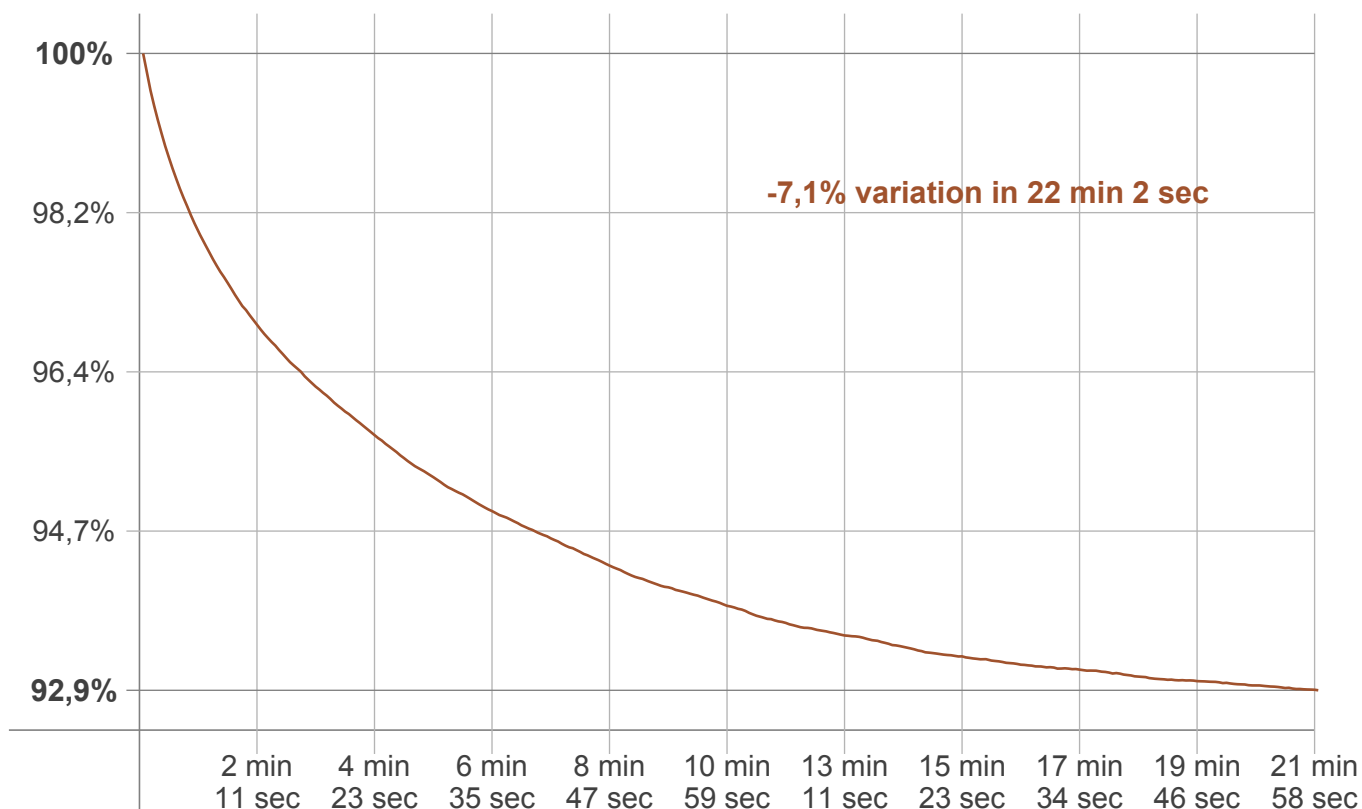

Warmup result

Warmup time:	22 min 2 sec
Warmup variation	-7,3%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
0 K	0 K	0 K

Output change

Output start	Output change	Output end
432 lm	-29 lm	403 lm