Light efficiency:

144 Lumen/Watt

Light quality:


CRI: 82,2


Color temperature:

2700 K

Output: 693 lm
Peak: 300 cd

Power: 4,8 W
PF: 1,0

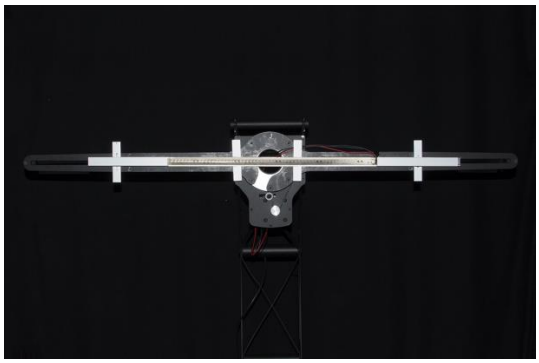

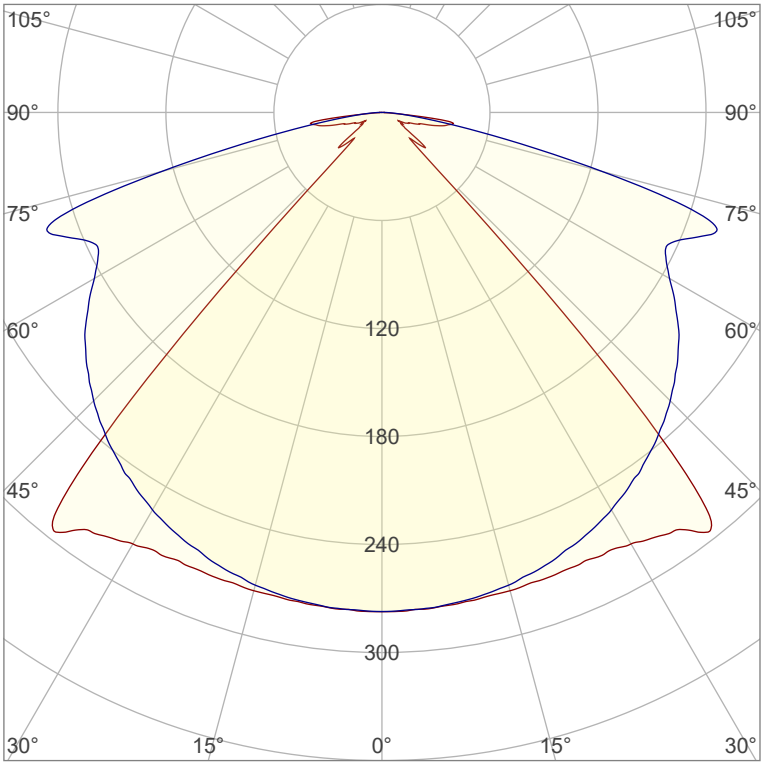

Product name:
Navigator-3_510mm_827_Lens-90°-Transparent


Item number:
NP/L1C/14C/0510/827/L9T

Date and time:
22.06.2022 11:29:27


Description:
Tolerances:
Lumen +/-4%
Candela +/-2,5%
Colour Temp +/-35 Kelvin
CRI +/-0,7
Angular Resolution: 1 Degree Step
Last Calibration 20-09-2021
Tester: Peter Ulrich
Test Site: Lichtlabor
Gaustrasse 13
55411 Bingen am Rhein

CIE 1931
x: 0,460
y: 0,411


Spectra

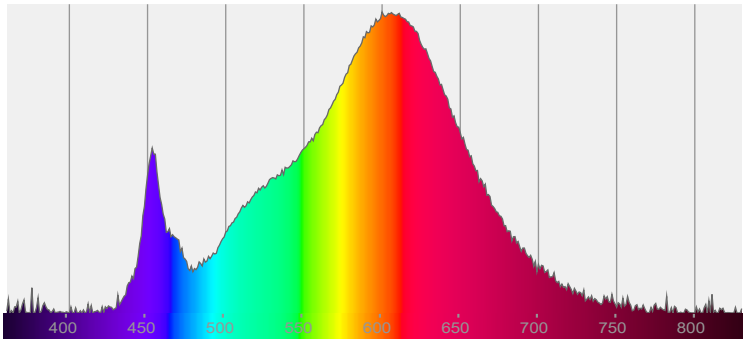


Power

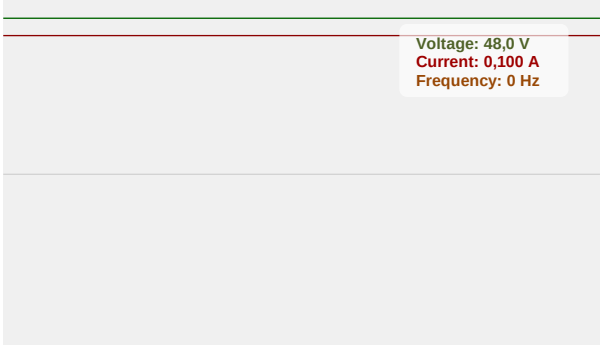


Color details

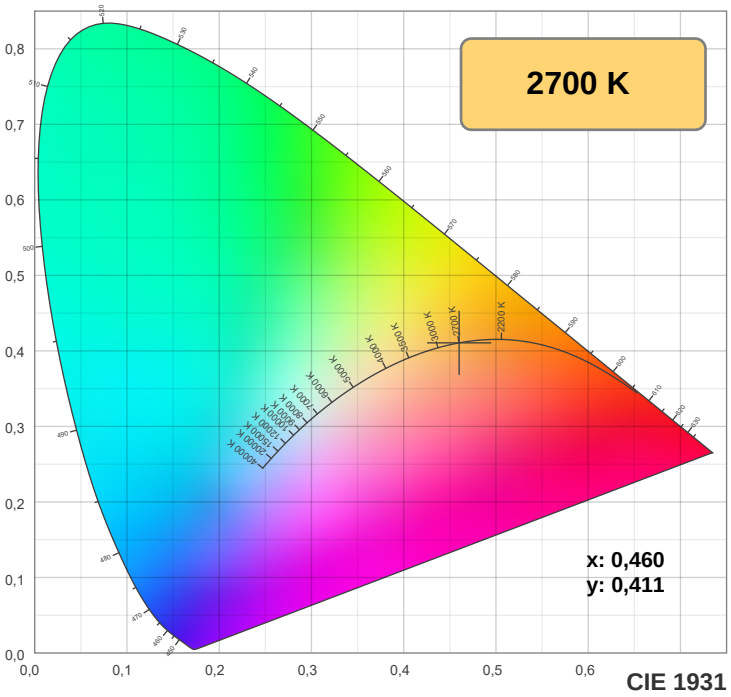


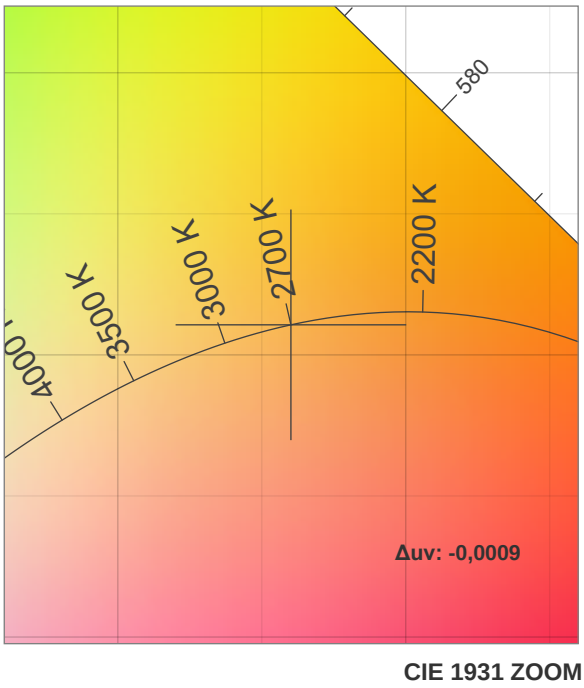

TM30: 84,1

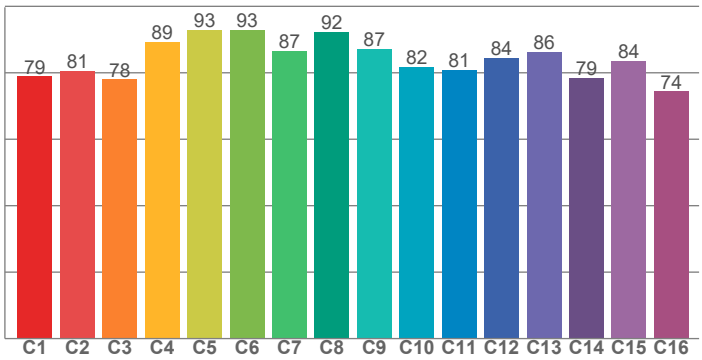

CRI: 82,2 (R1-R8)

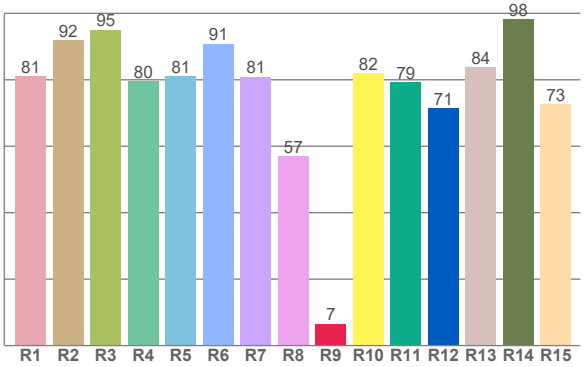

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
81,1	92,0	95,1	79,6	81,1	90,8	80,9	56,9	6,6	81,9	79,3	71,4	83,8	98,2	72,7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78,9	80,5	78,0	89,3	92,9	92,9	86,6	92,3	87,2	81,8	80,9	84,4	86,4	78,5	83,6	74,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
77,0	93,6	82,3	78,4	81,8	82,8	82,1	84,1	94,2	89,6	85,7	82,5	81,3	71,1	72,9

CQS: 81,4

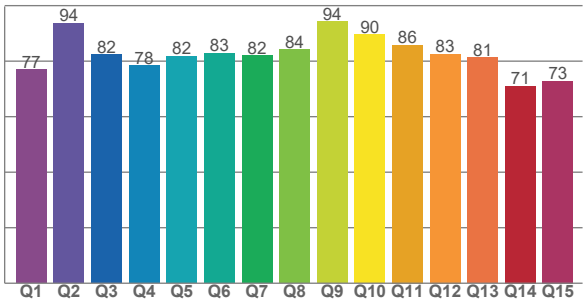

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2700 K	82,2	6,6	84,1	95,5	81,4	0,460	0,411	0,263	0,352	-0,0009

TM30 details


Rf 84,1


Fidelity index Rf


Rg 95,5


Gammut index Rg


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	79	-12%	1%
2	81	-8%	7%
3	78	-3%	11%
4	89	-1%	5%
5	93	1%	4%
6	93	2%	-3%
7	87	-5%	-6%
8	92	-4%	-1%
9	87	-6%	4%
10	82	-4%	11%
11	81	1%	14%
12	84	7%	2%
13	86	5%	-9%
14	79	5%	-17%
15	84	-4%	-9%
16	74	-9%	-17%

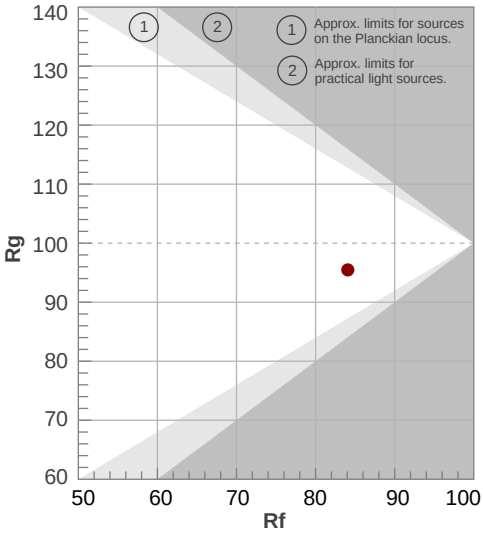


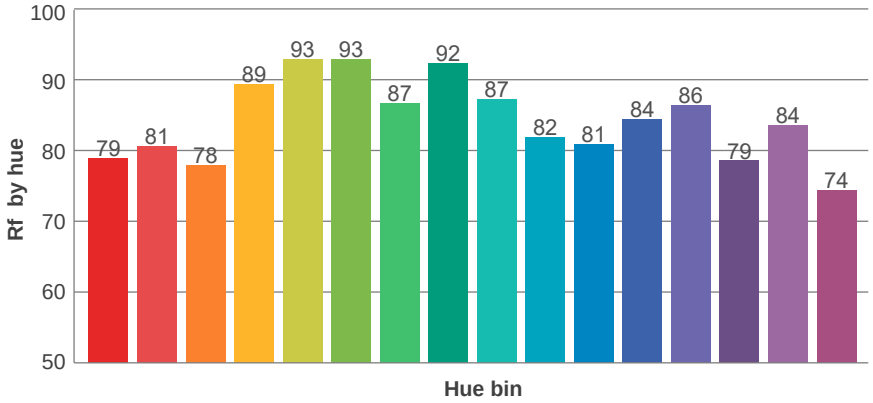

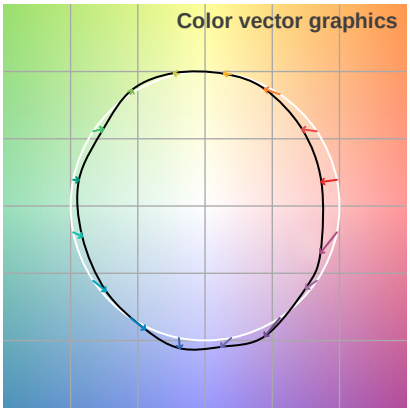


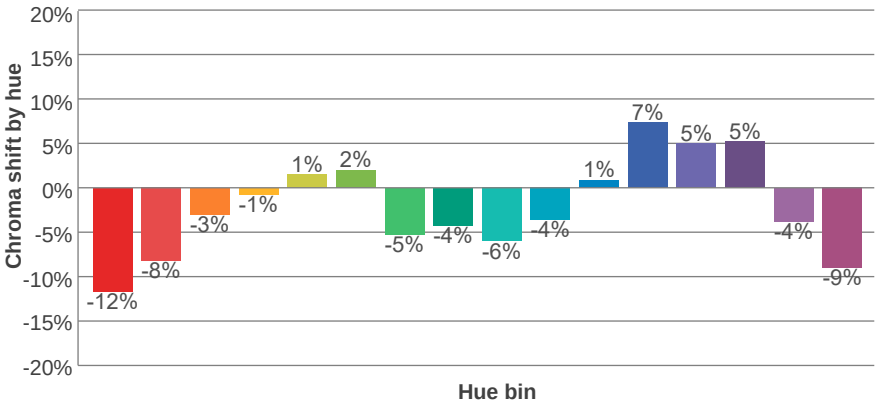

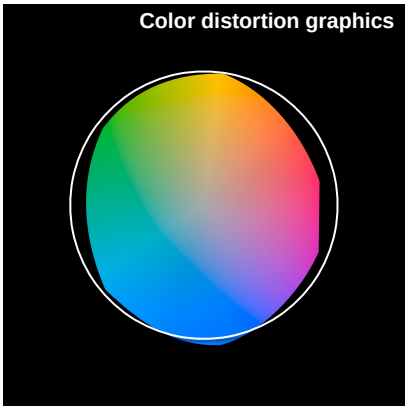

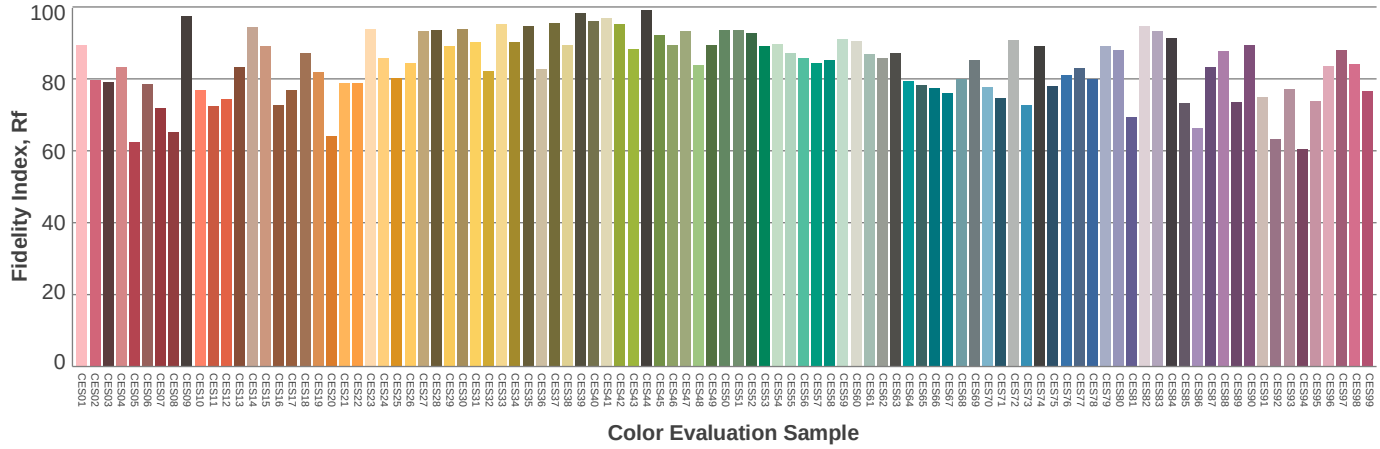

Beam details

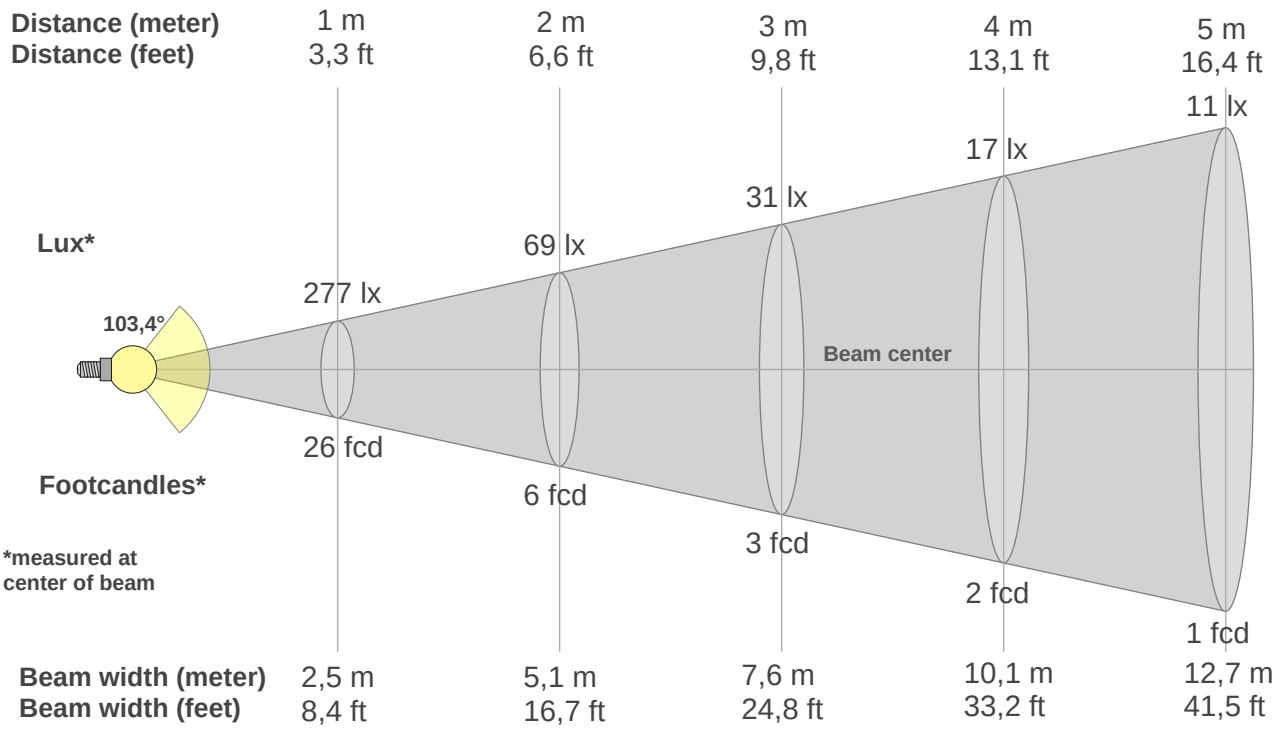

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
277lx	69lx	31lx	17lx	11lx	8lx	6lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx
25,7fcd	6,4fcd	2,9fcd	1,6fcd	1fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
277	277	276	275	274	274	277	284	264	31	29	18	12	13	18	27	39	10	1	1
100%	100%	99%	99%	99%	99%	100%	102%	95%	11%	11%	6%	4%	5%	6%	10%	14%	3%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
277	277	275	272	267	262	255	246	237	226	214	200	184	175	196	127	41	11	1	0
100%	100%	99%	98%	96%	94%	92%	89%	86%	82%	77%	72%	67%	63%	71%	46%	15%	4%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
277	277	276	275	274	274	277	284	264	31	29	18	12	13	18	27	39	10	1	1
100%	100%	99%	99%	99%	99%	100%	102%	95%	11%	11%	6%	4%	5%	6%	10%	14%	3%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
277	277	275	272	267	262	255	246	237	226	214	200	184	175	196	127	41	11	1	0
100%	100%	99%	98%	96%	94%	92%	89%	86%	82%	77%	72%	67%	63%	71%	46%	15%	4%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103,4°	**138,4°**	**165,7°**	**88,6%**	**69,3%**

ISO candela diagram

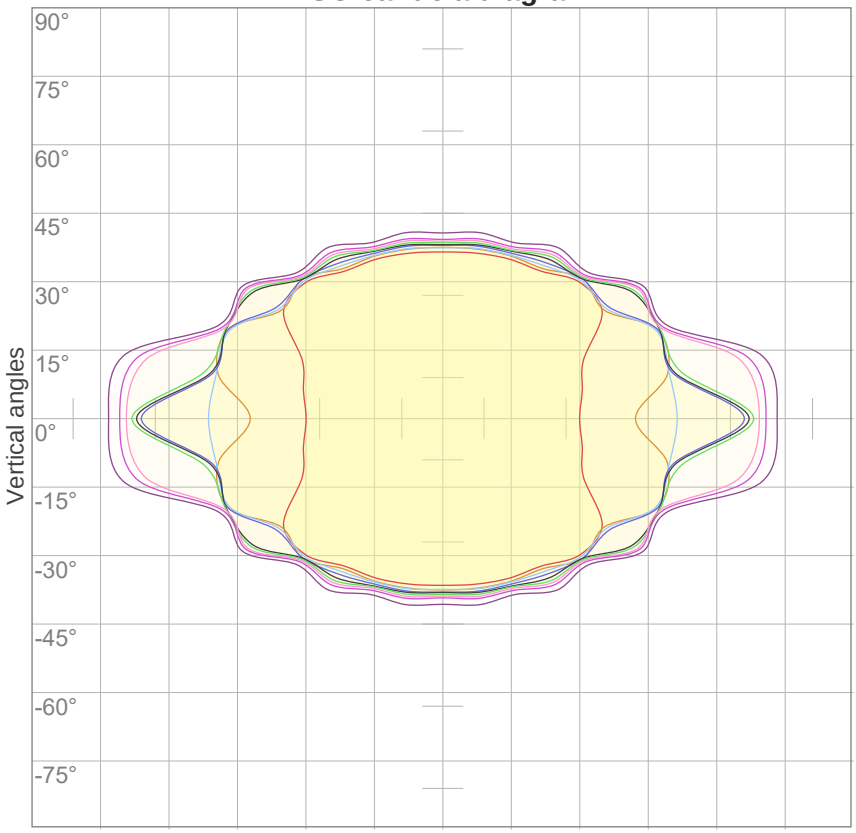


10%	28 cd
20%	55 cd
30%	83 cd
40%	111 cd
50%	139 cd
60%	166 cd
70%	194 cd
80%	222 cd
90%	249 cd

Conditions:

Number of c-planes: 16

Candela at center: 277 cd

ISO lux diagram

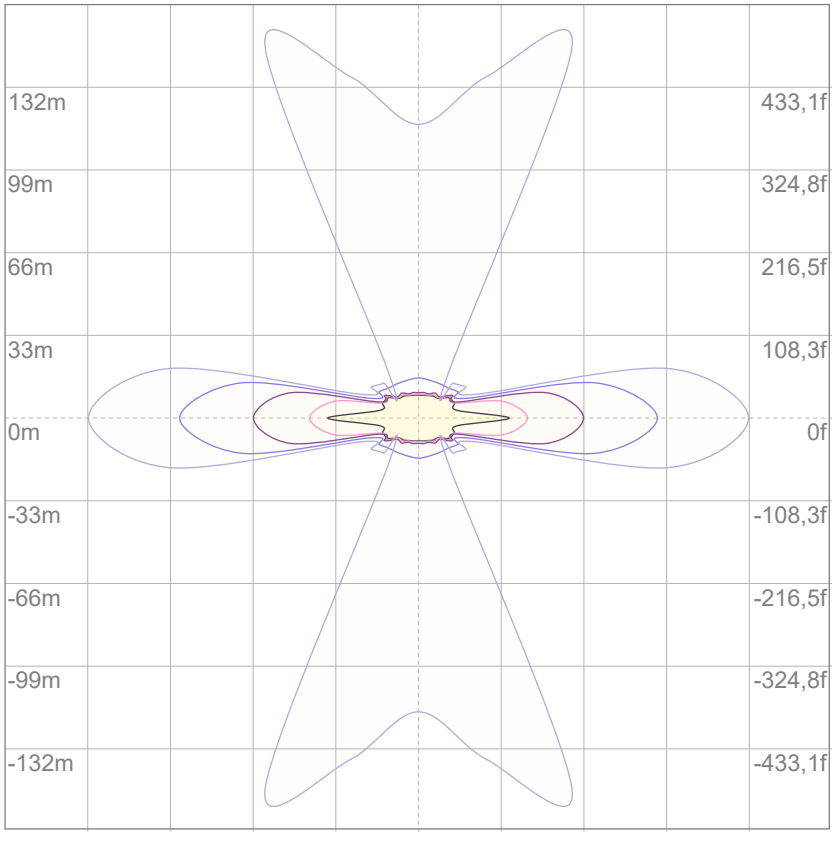

Mounting height: 10 meters (33 feet)

3%	83,2m lx
5%	0,139 lx
10%	0,277 lx
30%	0,832 lx
50%	1,39 lx

Conditions:

Number of c-planes: 16

Lux at center: 2,77 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.


Glare Evaluation According to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	17,5	18,6	17,7	18,9	19,1	24,2	25,2	24,4	25,5	25,7
	3H	17,5	18,6	17,9	18,9	19,1	26,2	27,4	26,6	27,6	27,8
	4H	17,9	19,0	18,3	19,2	19,5	27,5	28,6	27,9	28,8	29,1
	6H	19,2	20,2	19,5	20,4	20,8	28,0	28,9	28,3	29,2	29,6
	8H	20,0	20,9	20,4	21,2	21,6	28,0	28,9	28,3	29,2	29,6
	12H	20,3	21,2	20,6	21,5	21,9	28,0	28,9	28,3	29,2	29,6
4H	2H	17,6	18,7	18,0	19,0	19,2	23,8	24,9	24,2	25,1	25,4
	3H	17,8	18,7	18,2	19,0	19,5	26,1	26,9	26,4	27,3	27,7
	4H	18,3	19,1	18,7	19,5	20,0	27,3	28,1	27,7	28,5	29,0
	6H	20,0	20,8	20,5	21,1	21,5	27,7	28,5	28,2	28,8	29,2
	8H	21,0	21,7	21,5	22,1	22,5	27,8	28,5	28,3	28,8	29,2
	12H	21,4	22,0	21,9	22,4	22,9	27,8	28,4	28,3	28,8	29,3
8H	4H	18,3	19,0	18,8	19,4	19,8	27,2	27,9	27,7	28,2	28,6
	6H	20,4	20,9	20,9	21,4	21,9	27,6	28,2	28,1	28,6	29,2
	8H	21,8	22,2	22,3	22,7	23,4	27,7	28,2	28,2	28,7	29,3
	12H	22,4	22,8	23,0	23,3	23,9	27,7	28,1	28,3	28,6	29,2
12H	4H	18,3	18,9	18,8	19,3	19,8	27,1	27,7	27,6	28,1	28,6
	6H	20,4	20,9	21,0	21,4	22,1	27,6	28,1	28,1	28,6	29,2
	8H	21,9	22,3	22,5	22,8	23,4	27,7	28,1	28,3	28,6	29,2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,7 / -0,7					0,6 / -1,1				
S = 1.5H		1,4 / -0,7					2,0 / -3,3				
S = 2.0H		2,5 / -0,8					3,0 / -6,1				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 693 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio)				Room Values are expressed as percentage of Lumens delivered to the task surface													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	102	98	107	103	100	97	99	96	94	95	93	91	92	90	88	86
2	101	94	88	83	99	92	87	82	89	84	80	85	82	78	82	79	76	74
3	94	84	77	71	91	83	76	70	80	74	69	77	72	68	74	70	67	65
4	86	76	68	62	84	74	67	61	72	65	60	70	64	60	67	63	59	57
5	80	68	60	54	78	67	59	54	65	58	53	63	57	53	61	56	52	50
6	74	62	54	48	72	61	53	48	59	52	47	58	51	47	56	51	46	44
7	69	56	48	43	67	56	48	42	54	47	42	53	47	42	51	46	42	40
8	64	52	44	38	63	51	43	38	50	43	38	49	42	38	47	42	37	36
9	60	48	40	35	59	47	40	34	46	39	34	45	39	34	44	38	34	32
10	57	44	36	31	55	43	36	31	42	36	31	42	35	31	41	35	31	29

Luminaire budgetary diagram

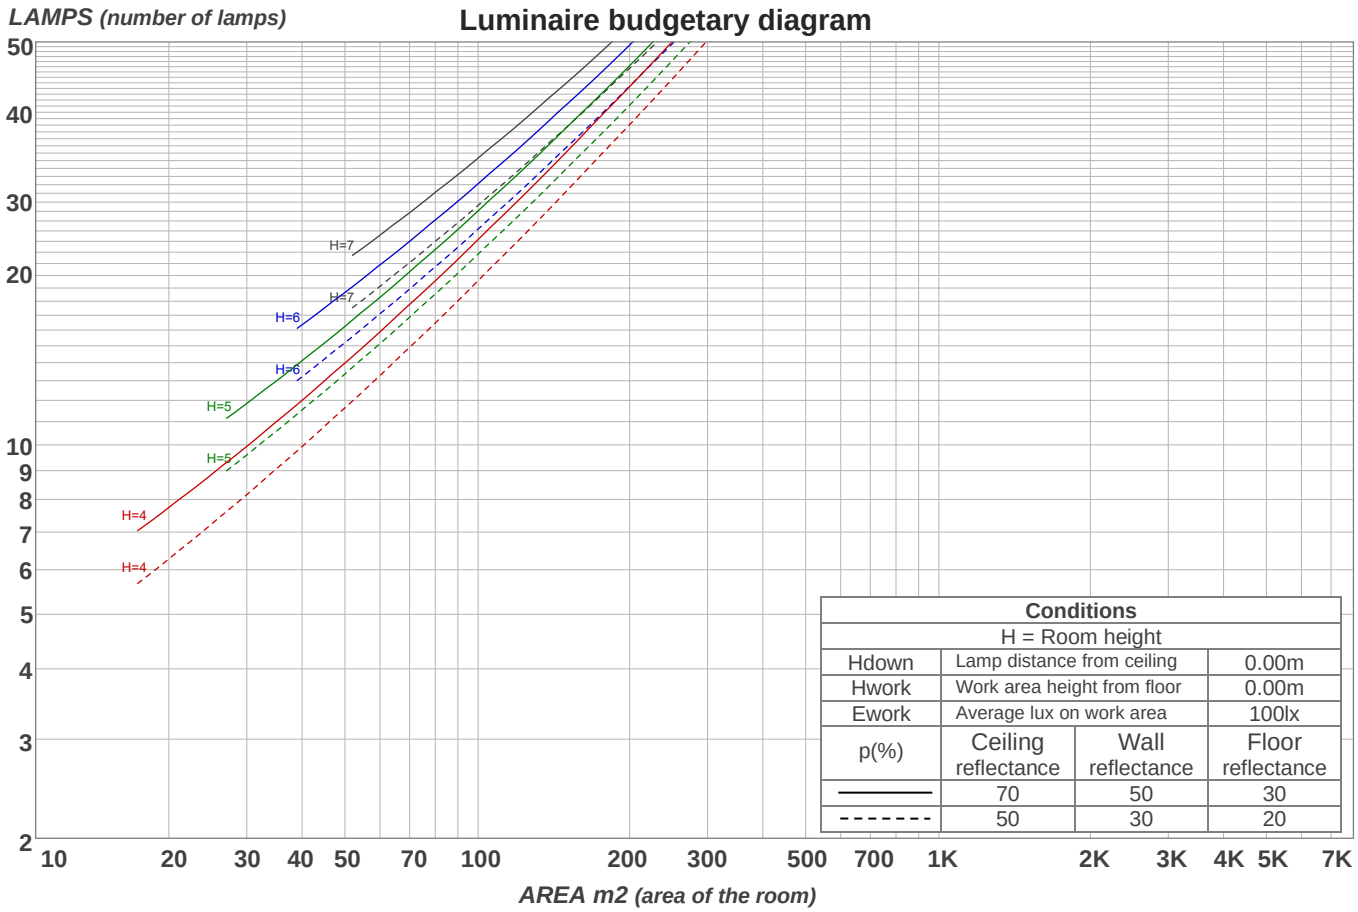


Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
26,4 lm	77,3 lm	124 lm	167 lm	143 lm	76,7 lm	32,3 lm	29,4 lm	15,2 lm

90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,636 lm	0,300 lm	0,240 lm	0,217 lm	0,160 lm	0,107 lm	0,079 lm	0,048 lm	0,016 lm

Warmup curve

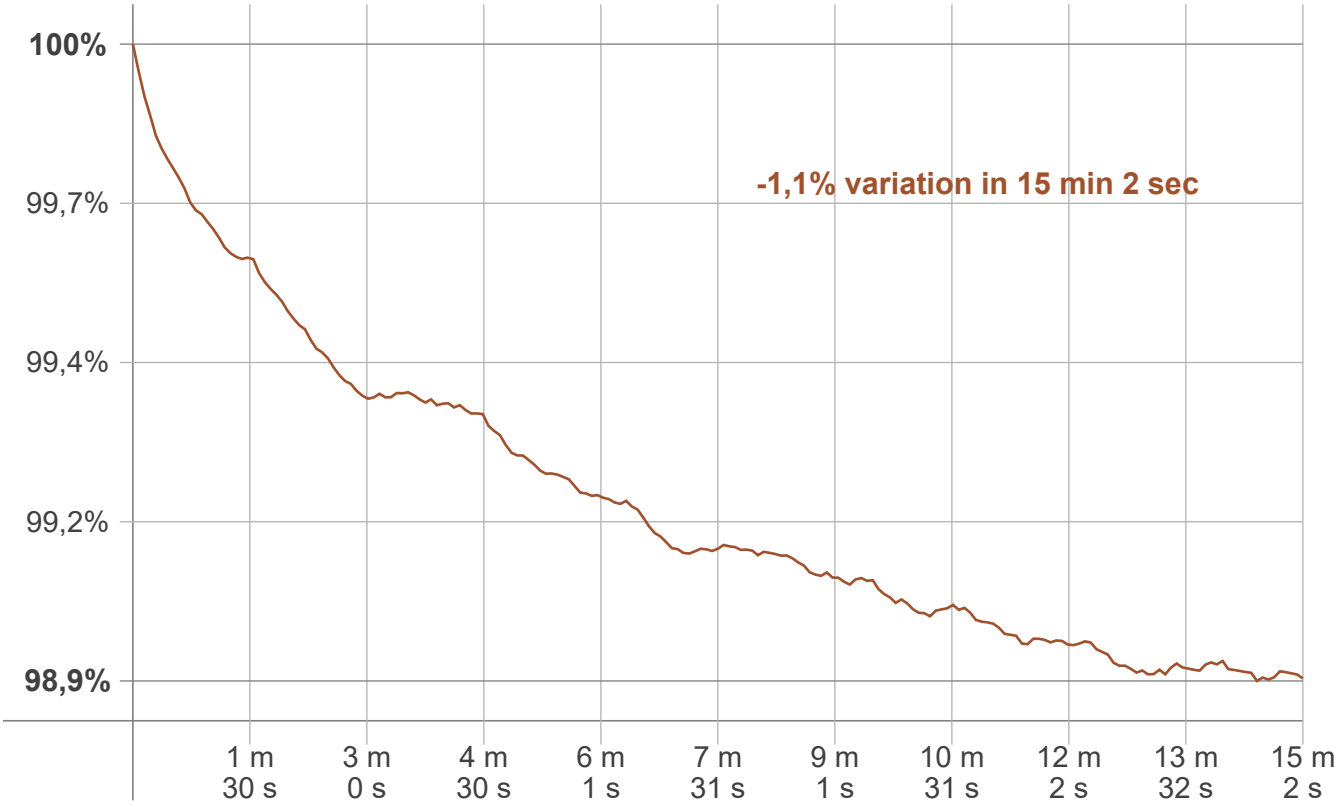

Warmup result

Warmup time:	**Lamp stabilized in 15 min 2 sec**
Warmup variation	**-1,1%**

Warmup conditions

Stable period:	**15 min**
Stable change max:	**2,0%**
Minimum time:	**15 min**

Color temperature change

CCT start	CCT change	CCT end
2696 K	+4 K	2700 K

Output change

Output start	Output change	Output end
702 lm	-9 lm	693 lm