

Light efficiency:

101 Lumen/Watt

Light quality:

CRI: 92,2

Color temperature:


5516 K

Output: 1019 lm

Peak: 349 cd

Power: 10,1 W

PF: 1,0

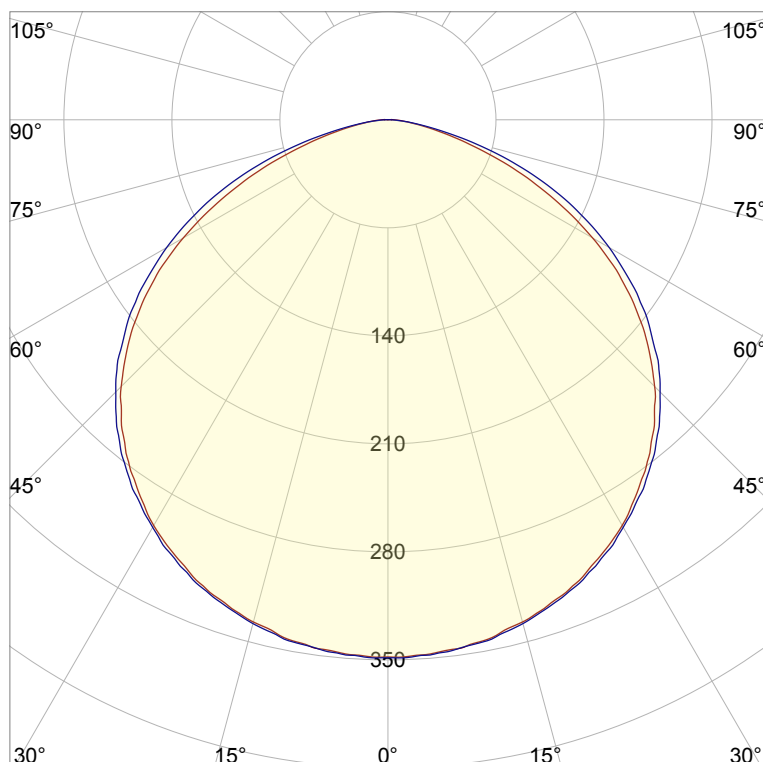

Product name:

Pegasus-4-0508-956-CFT

Item number:

FLNP/L/09D0508/956/CFT

Date and time:

07.04.2021 15:29:16

Description:

Rank: G7-2G0

Toleranzen:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 K

CRI +/-0,7

Angular Resolution 1 Grad step

Last Calibration 20-05-2020

Pruefer: Peter Ulrich

Pruefort: Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein




CIE 1931


x: 0,332

y: 0,345



Spectra

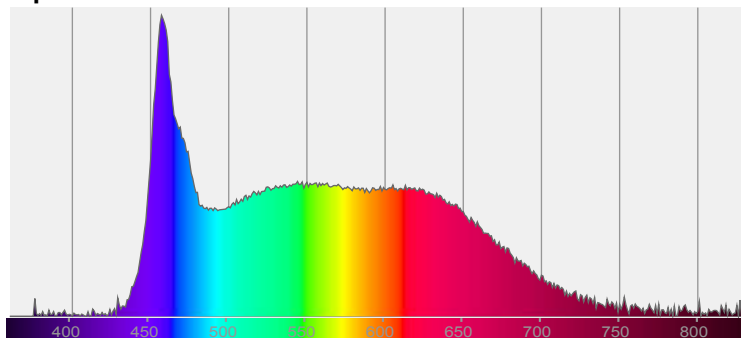


Power

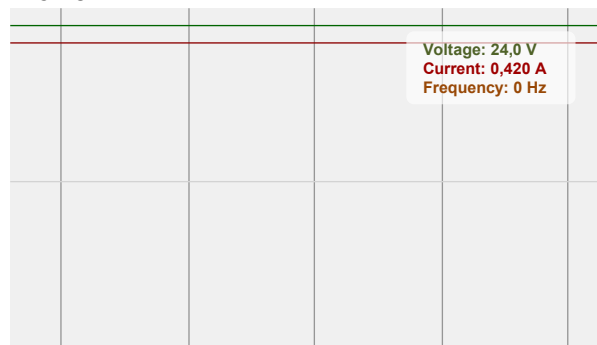


Voltage: 24,0 V
Current: 0,420 A
Frequency: 0 Hz

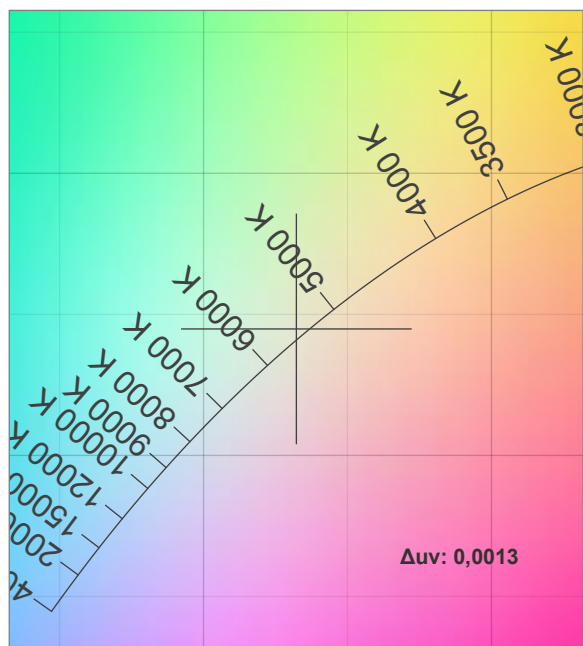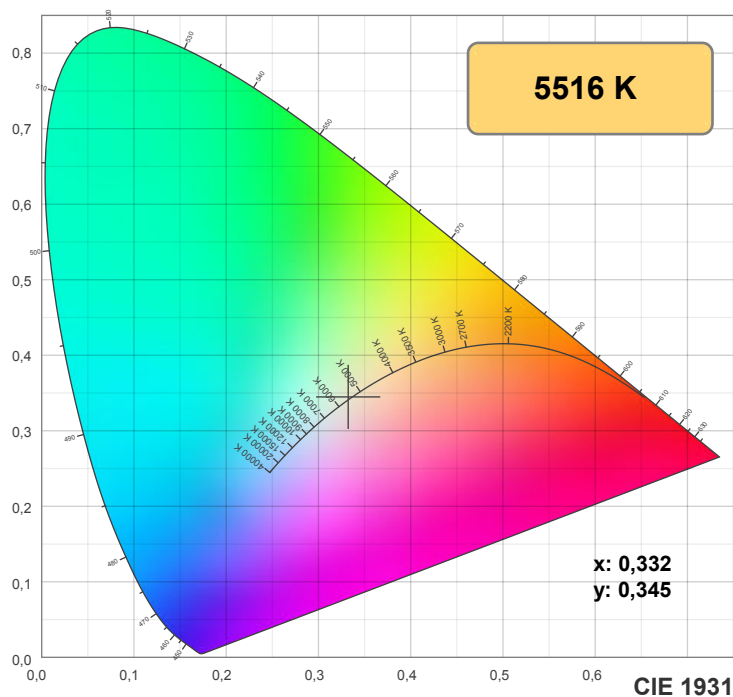

TM30: 86,4

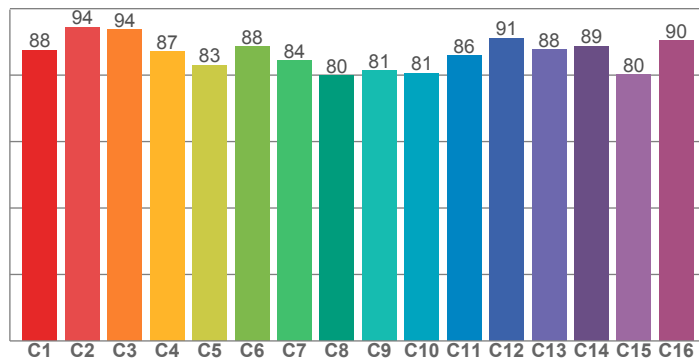

CRI: 92,2 (R1-R8)

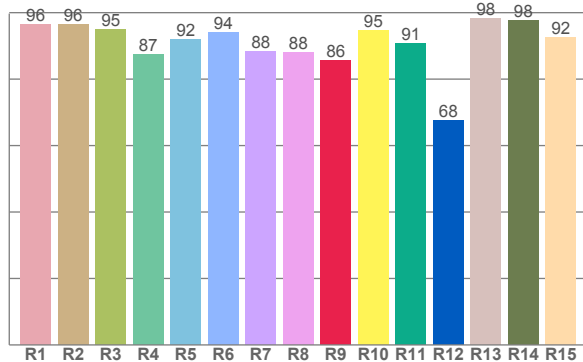

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,4	96,4	94,8	87,3	92,0	94,0	88,4	88,2	85,5	94,8	90,7	67,5	98,2	97,8	92,5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
87,5	94,5	93,8	87,0	83,1	88,5	84,5	79,9	81,3	80,6	85,9	91,1	87,6	88,7	80,2	90,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
83,8	91,4	92,6	84,7	84,0	84,6	91,8	94,5	95,9	97,0	98,2	97,2	96,4	94,4	91,0

CQS: 90,4

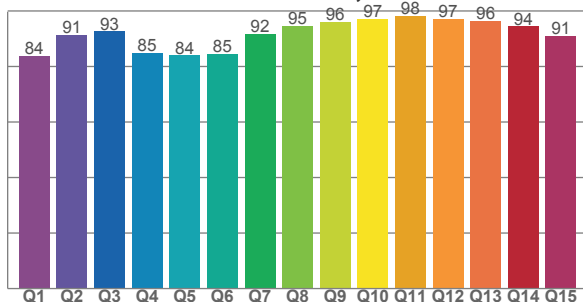

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
5516 K	92,2	85,5	86,4	94,2	90,4	0,332	0,345	0,205	0,320	0,0013







Rf 86,4


Fidelity index Rf

Rg 94,2

Gamut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	88	-3%	3%
2	94	0%	2%
3	94	-1%	-3%
4	87	-6%	-6%
5	83	-11%	-4%
6	88	-8%	-1%
7	84	-9%	5%
8	80	-6%	11%
9	81	-2%	17%
10	81	2%	12%
11	86	6%	6%
12	91	3%	-5%
13	88	1%	-8%
14	89	-4%	-5%
15	80	4%	-13%
16	90	-5%	3%

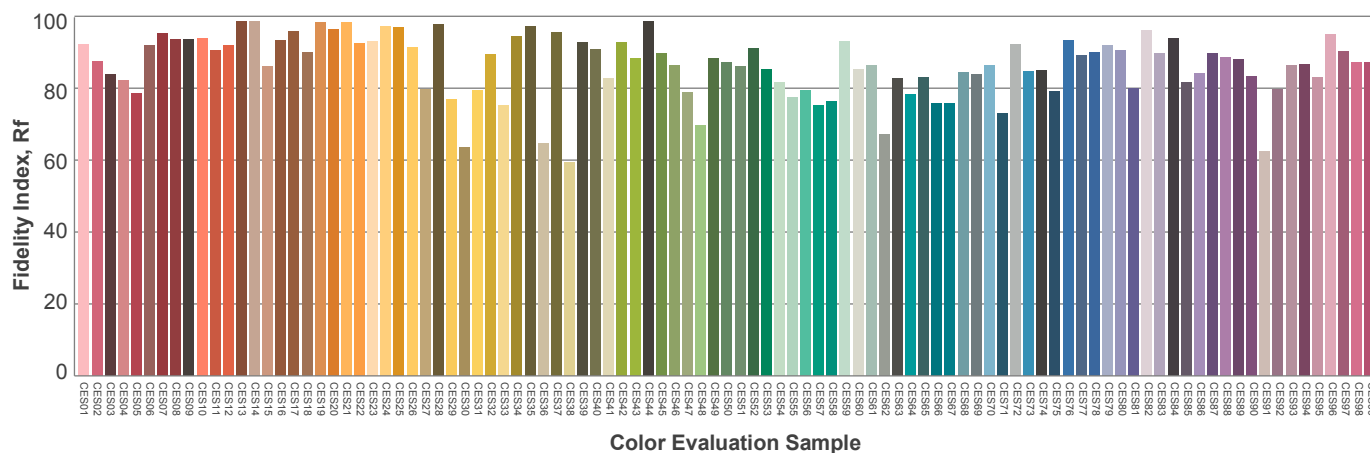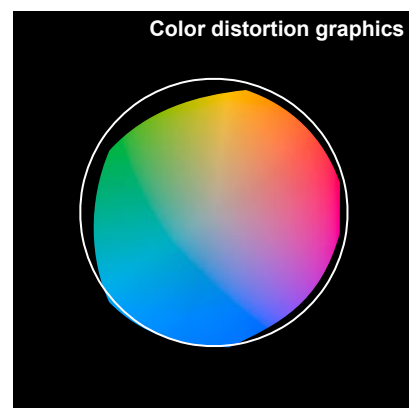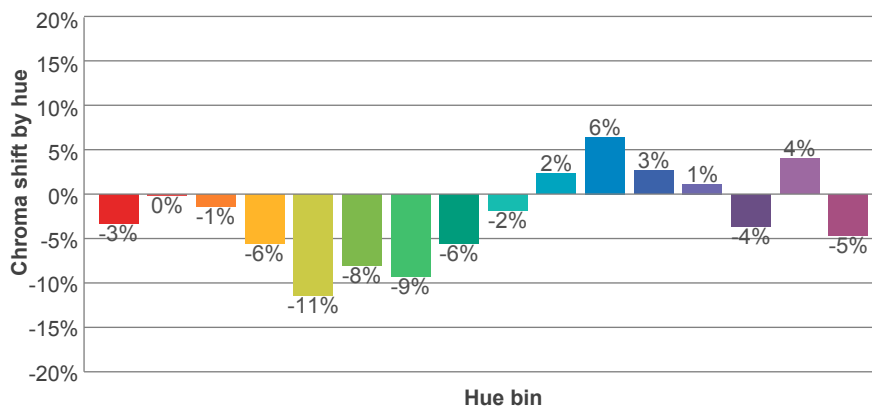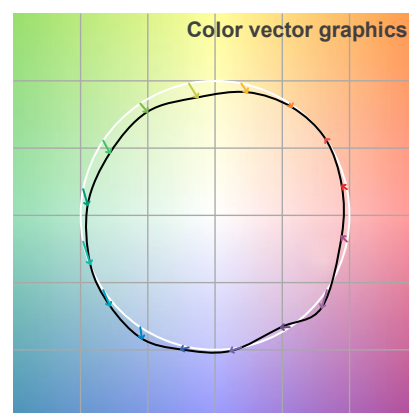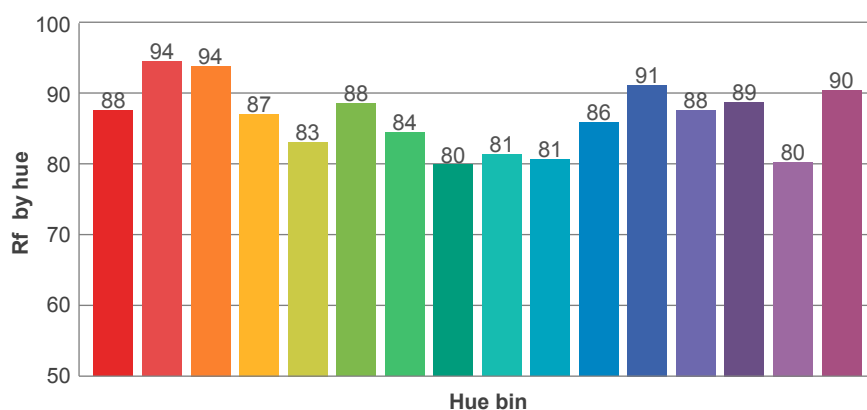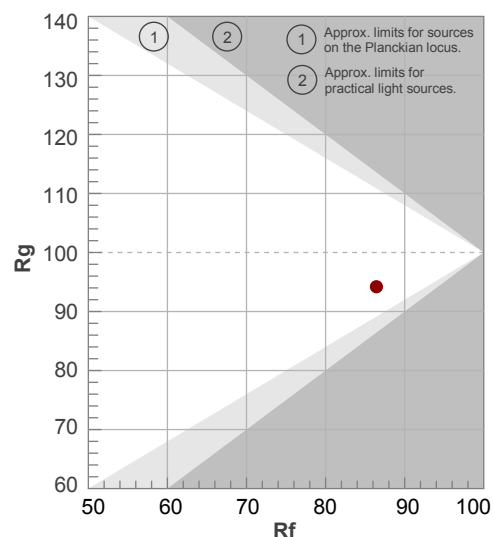

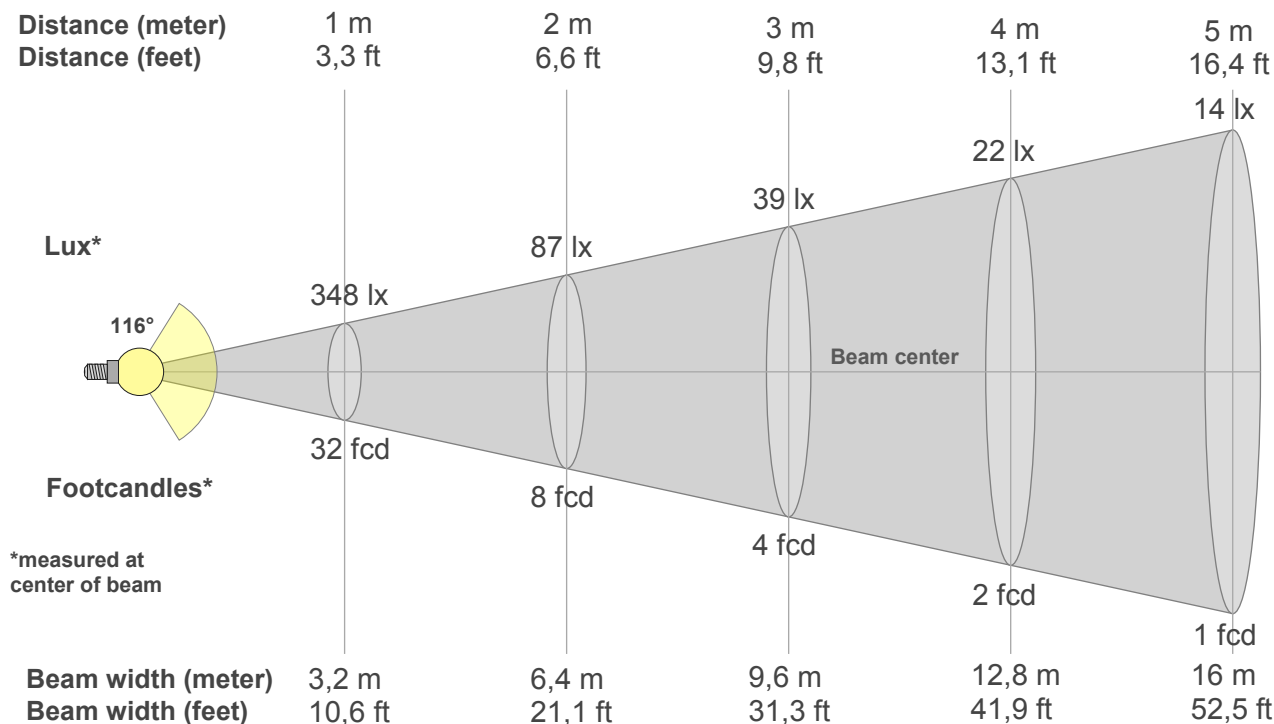

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
348lx	87lx	39lx	22lx	14lx	10lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx
32,4fcd	8,1fcd	3,6fcd	2fcd	1,3fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
348	347	343	337	328	317	304	286	267	244	218	187	153	115	78	45	22	10	3	0
100%	100%	99%	97%	94%	91%	87%	82%	77%	70%	63%	54%	44%	33%	22%	13%	6%	3%	1%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
348	347	344	338	330	319	305	290	271	249	224	197	166	131	94	57	26	9	1	0
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	64%	57%	48%	38%	27%	16%	8%	2%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
348	347	343	337	328	317	304	286	267	244	218	187	153	115	78	45	22	10	3	0
100%	100%	99%	97%	94%	91%	87%	82%	77%	70%	63%	54%	44%	33%	22%	13%	6%	3%	1%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
348	347	344	338	330	319	305	290	271	249	224	197	166	131	94	57	26	9	1	0
100%	100%	99%	97%	95%	92%	88%	83%	78%	72%	64%	57%	48%	38%	27%	16%	8%	2%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
116°	155,6°	171,6°	80,3%	54,1%

ISO candela diagram

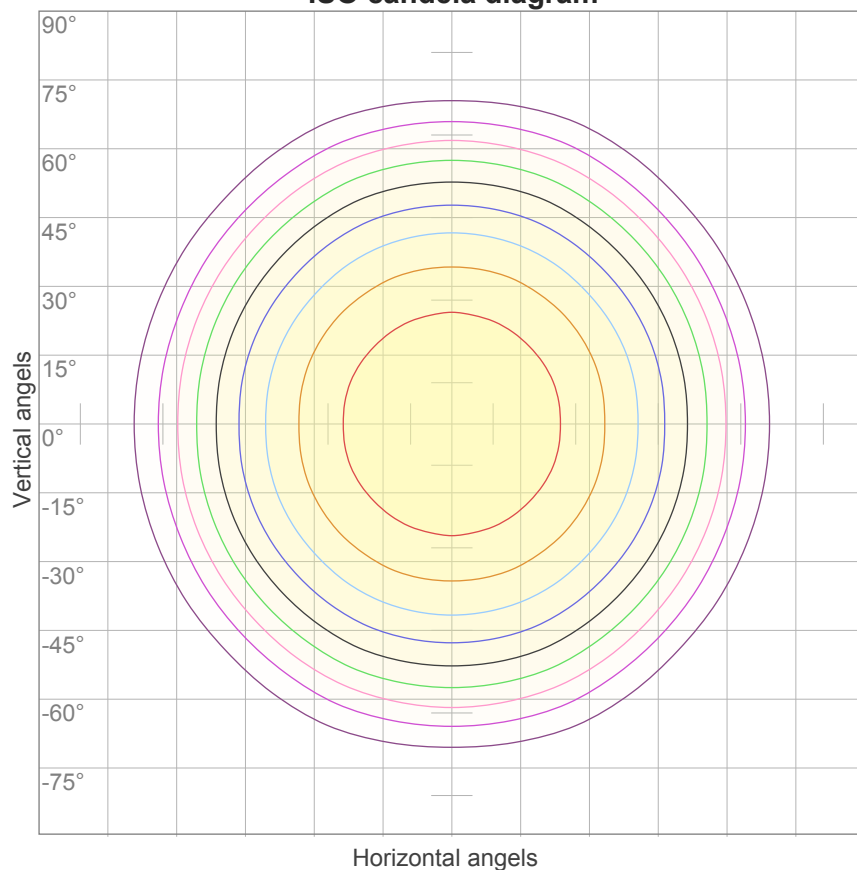


10%	35 cd
20%	70 cd
30%	105 cd
40%	139 cd
50%	174 cd
60%	209 cd
70%	244 cd
80%	279 cd
90%	314 cd

Conditions:

Number of c-planes: 16

Candela at center: 348 cd

ISO lux diagram

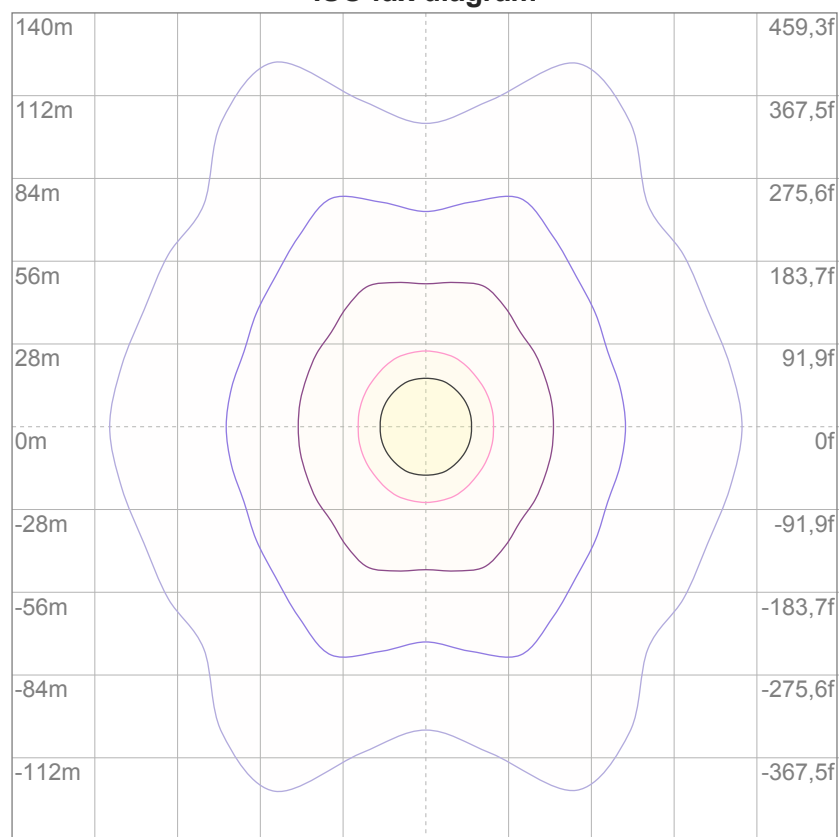

3%	0,105 lx
5%	0,174 lx
10%	0,348 lx
30%	1,05 lx
50%	1,74 lx

Conditions:

Number of c-planes: 16

Lux at center: 3,48 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23,5	24,7	23,8	25,1	25,3	24,4	25,6	24,6	25,9	26,1
	3H	24,4	25,7	24,8	25,9	26,1	25,6	26,9	26,1	27,2	27,4
	4H	24,7	25,8	25,1	26,1	26,4	26,1	27,3	26,5	27,6	27,8
	6H	24,8	25,9	25,1	26,1	26,5	26,4	27,4	26,7	27,7	28,1
	8H	24,8	25,8	25,1	26,1	26,5	26,4	27,4	26,7	27,7	28,1
	12H	24,8	25,7	25,1	26,1	26,5	26,4	27,3	26,7	27,7	28,1
4H	2H	24,1	25,3	24,5	25,6	25,8	24,8	25,9	25,2	26,2	26,5
	3H	25,2	26,2	25,6	26,5	27,0	26,3	27,3	26,7	27,6	28,1
	4H	25,5	26,3	25,9	26,8	27,3	26,8	27,7	27,2	28,1	28,6
	6H	25,6	26,4	26,1	26,8	27,2	27,0	27,9	27,5	28,3	28,6
	8H	25,6	26,4	26,1	26,8	27,1	27,1	27,9	27,6	28,3	28,6
	12H	25,6	26,2	26,1	26,7	27,1	27,1	27,8	27,6	28,2	28,7
8H	4H	25,6	26,4	26,1	26,8	27,1	26,8	27,6	27,3	28,0	28,4
	6H	25,8	26,4	26,3	26,9	27,4	27,2	27,8	27,7	28,3	28,8
	8H	25,9	26,4	26,4	26,9	27,6	27,3	27,8	27,8	28,4	29,0
	12H	25,9	26,3	26,5	26,8	27,4	27,4	27,8	28,0	28,3	28,9
12H	4H	25,6	26,2	26,1	26,7	27,1	26,8	27,4	27,3	27,9	28,3
	6H	25,9	26,4	26,4	26,9	27,5	27,2	27,7	27,7	28,2	28,9
	8H	25,9	26,3	26,5	26,8	27,4	27,3	27,8	27,9	28,3	28,9
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,1 / -0,1				
S = 1.5H		0,4 / -0,6					0,2 / -0,3				
S = 2.0H		0,9 / -1,3					0,7 / -0,9				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1019 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	109	104	100	97	106	102	98	95	98	94	92	93	91	89	90	88	86	84
2	99	91	84	79	96	89	83	78	85	80	76	82	78	74	79	75	72	70
3	90	80	72	66	88	78	71	65	75	69	64	72	67	62	70	65	61	59
4	83	71	62	56	80	69	61	55	67	60	54	64	58	53	62	57	53	50
5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	50	46	43
6	70	57	48	42	68	56	47	41	54	46	41	52	46	40	51	45	40	38
7	65	51	43	37	63	51	42	36	49	42	36	47	41	36	46	40	35	33
8	60	47	38	33	59	46	38	32	45	37	32	43	37	32	42	36	32	30
9	56	43	35	29	55	42	35	29	41	34	29	40	33	29	39	33	29	27
10	53	40	32	26	52	39	31	26	38	31	26	37	31	26	36	30	26	24

LAMPS (number of lamps)


Luminaire budgetary diagram

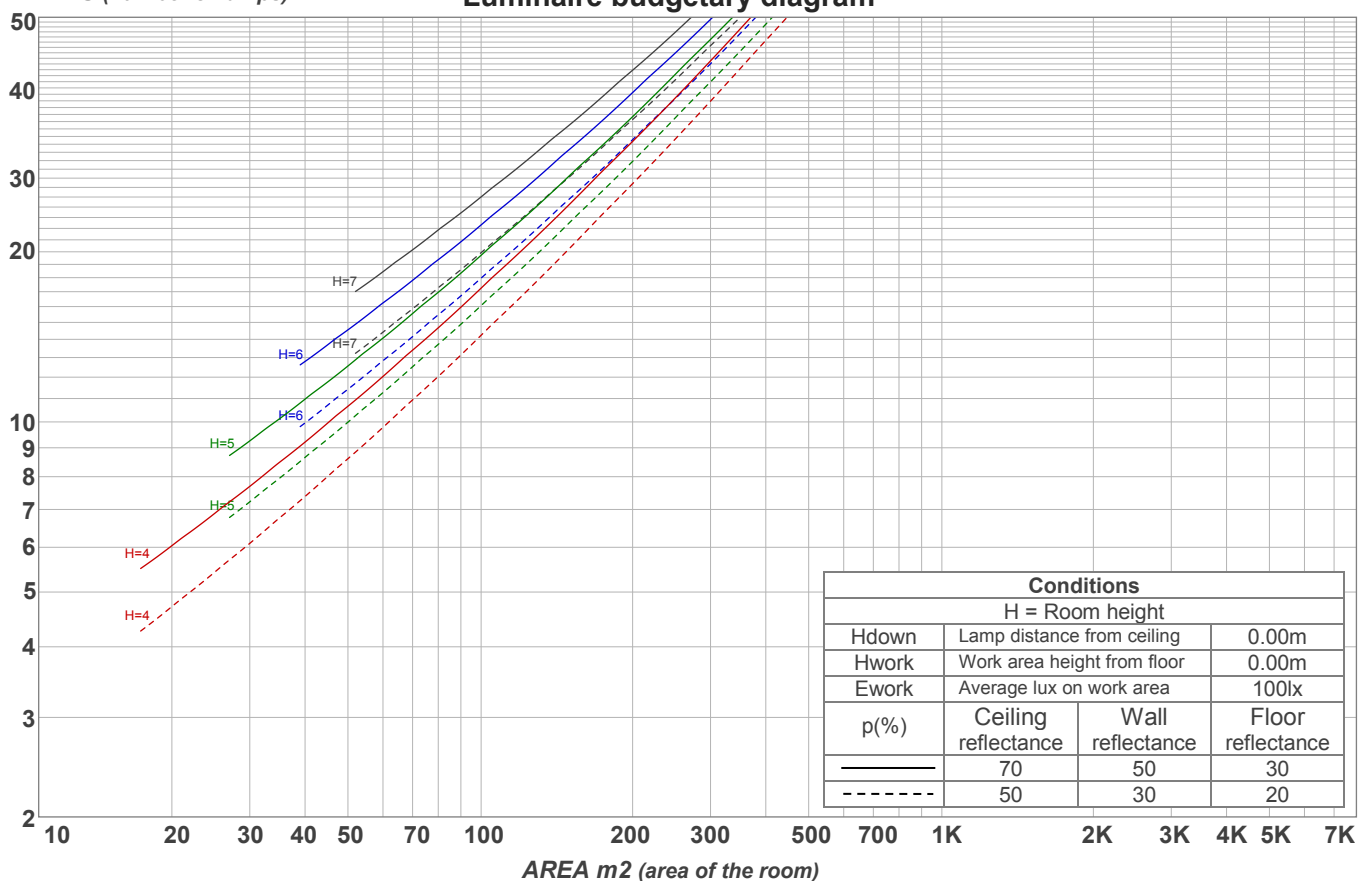

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
33,0 lm	95,3 lm	147 lm	180 lm	191 lm	172 lm	122 lm	55,3 lm	12,5 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
3,54 lm	1,43 lm	1,32 lm	1,19 lm	1,03 lm	0,835 lm	0,616 lm	0,377 lm	0,127 lm

Warmup curve

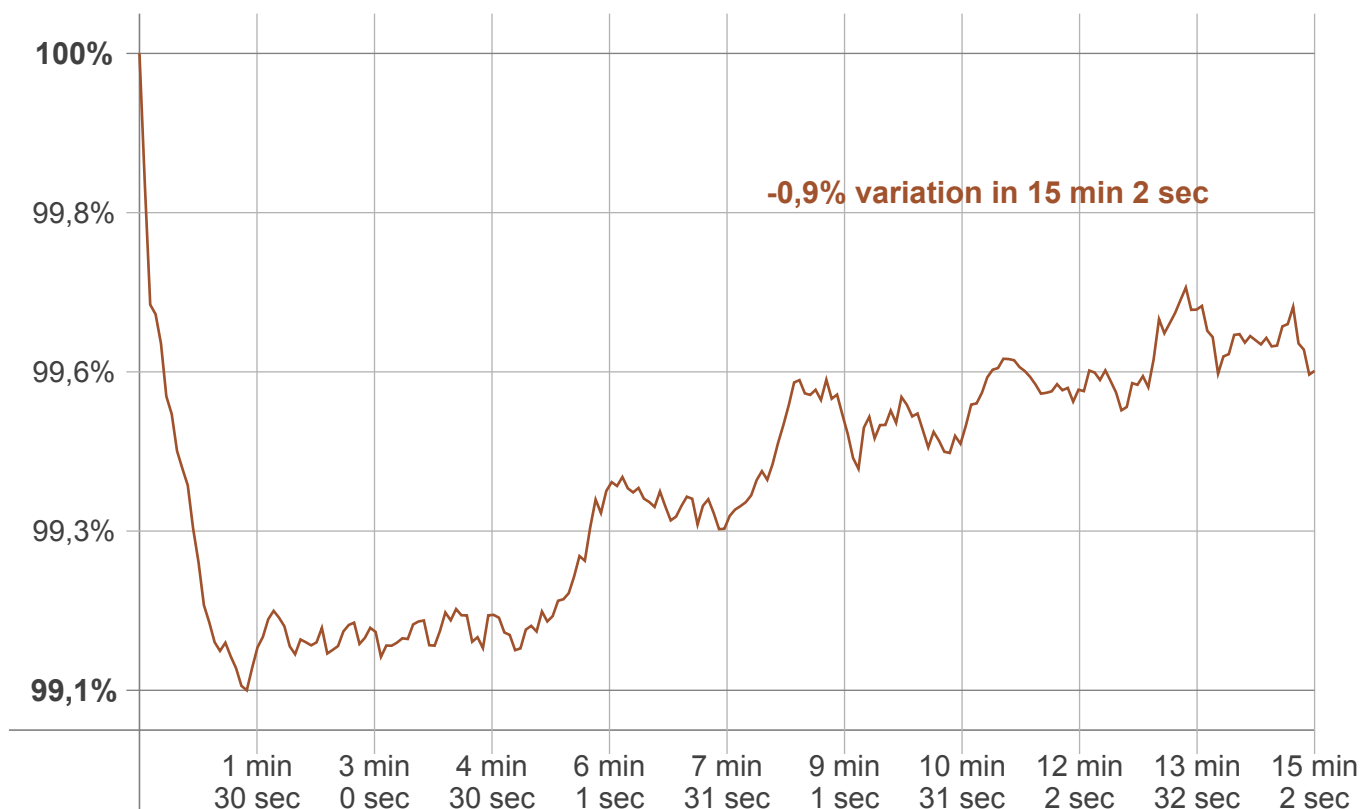

Warmup result

Warmup time:	15 min 2 sec
Warmup variation	-0,9%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
5518 K	-2 K	5516 K

Output change

Output start	Output change	Output end
1021 lm	-3 lm	1019 lm