

Light efficiency:

119 Lumen/Watt

Light quality:

CRI: 94,4

Color temperature:



2735 K

Output: 569 lm

Peak: 231 cd

Power: 4,8 W

PF: 1,0

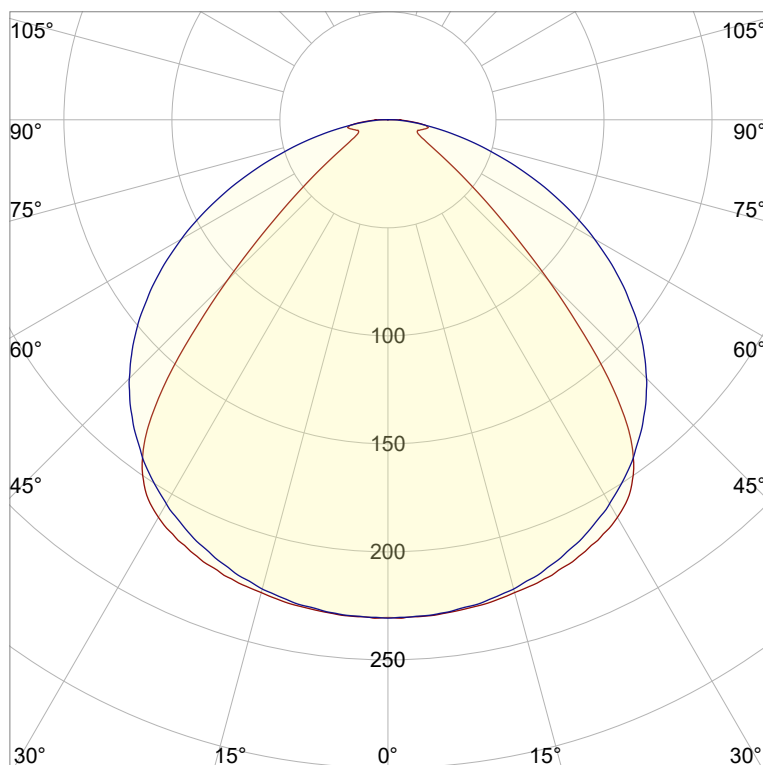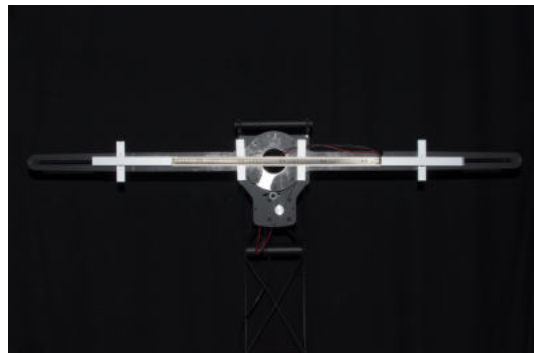

Product name:

Victory-7_510mm_927_Lens-90°-Frosted

Item number:

NP/L1C/03F/G1/L1C/0510/927/L9F

Date and time:

02.06.2022 13:27:00

Description:

Rank: C80-AD-8GB

Tolerances:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 Kelvin

CRI +/-0,7

Angular Resolution: 1 Degree Step

Last Calibration 20-09-2021

Tester: Peter Ulrich

Test Site: Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein




CIE 1931

x: 0,457

y: 0,409

Spectra


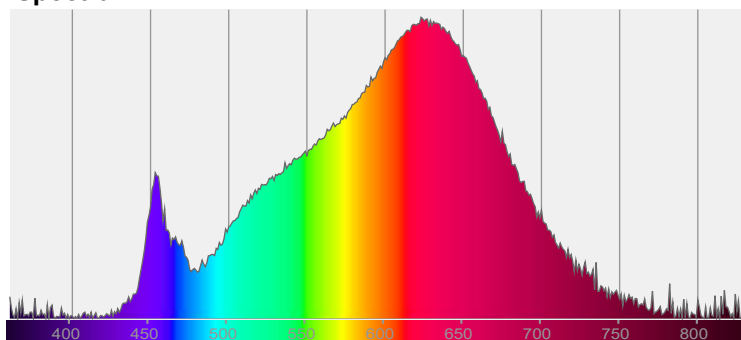


Power


Voltage: 48,0 V

Current: 0,100 A


Frequency: 0 Hz

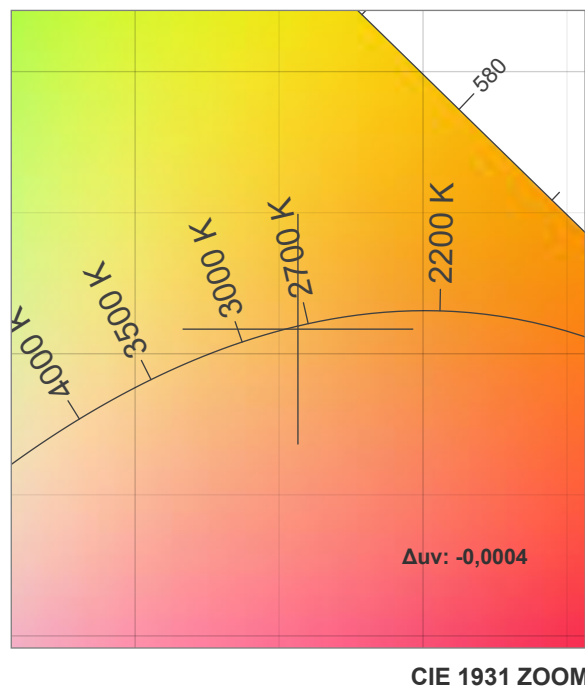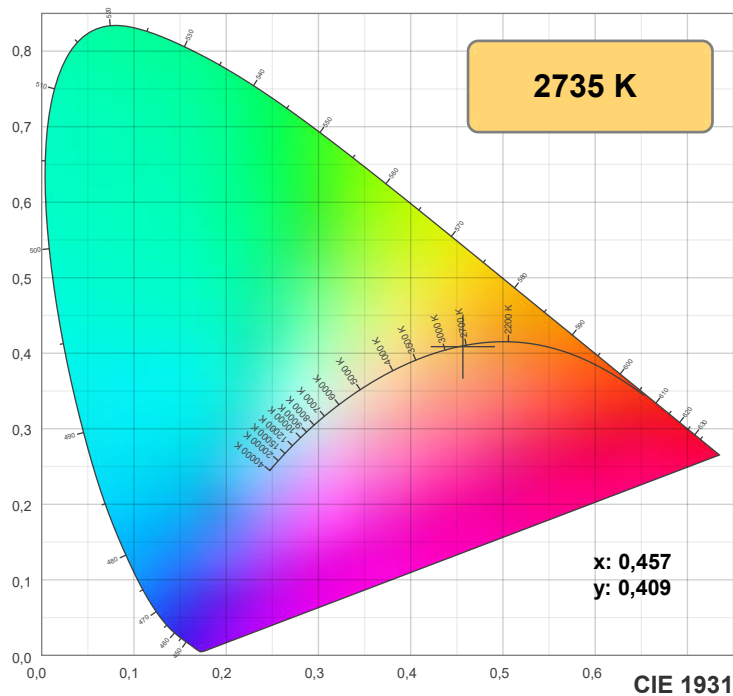

TM30: 92,1

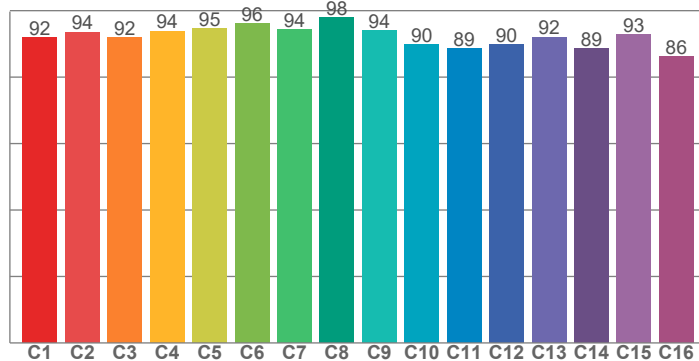

CRI: 94,4 (R1-R8)

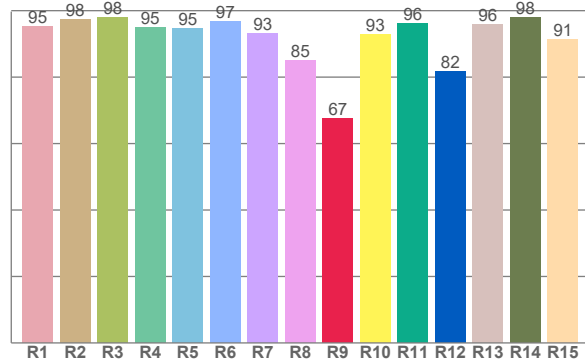

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,1	97,5	98,1	95,0	94,7	96,7	93,1	85,2	67,5	92,9	96,3	81,6	95,9	98,0	91,3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,0	93,5	91,9	93,9	94,7	96,1	94,4	98,0	93,9	89,8	88,7	89,9	92,1	88,5	92,8	86,2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,6	95,1	89,0	88,7	92,1	93,3	91,5	92,5	97,2	94,3	94,0	93,6	93,3	89,0	89,1

CQS: 91,6

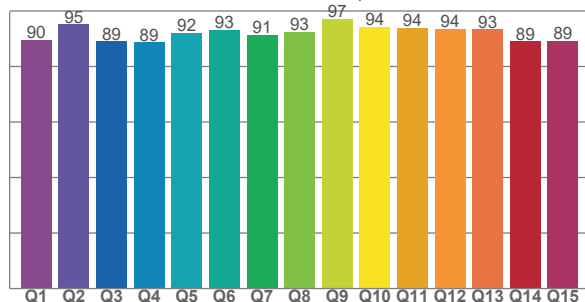

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2735 K	94,4	67,5	92,1	99,6	91,6	0,457	0,409	0,261	0,351	-0,0004







Rf 92,1


Fidelity index Rf

Rg 99,6

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	1%
2	94	-3%	2%
3	92	-1%	4%
4	94	-2%	1%
5	95	-1%	2%
6	96	2%	1%
7	94	-2%	-1%
8	98	-1%	0%
9	94	-1%	3%
10	90	0%	7%
11	89	2%	8%
12	90	5%	1%
13	92	3%	-5%
14	89	4%	-8%
15	93	-2%	-3%
16	86	-2%	-11%

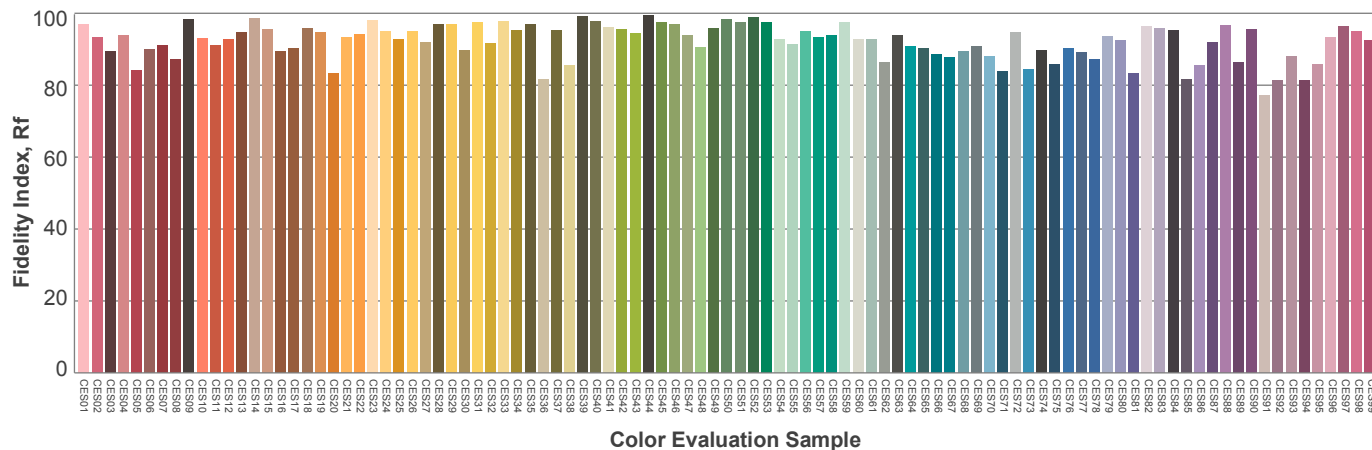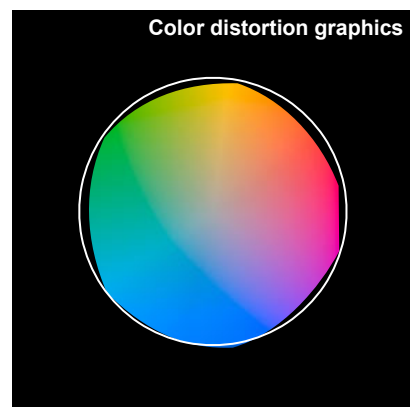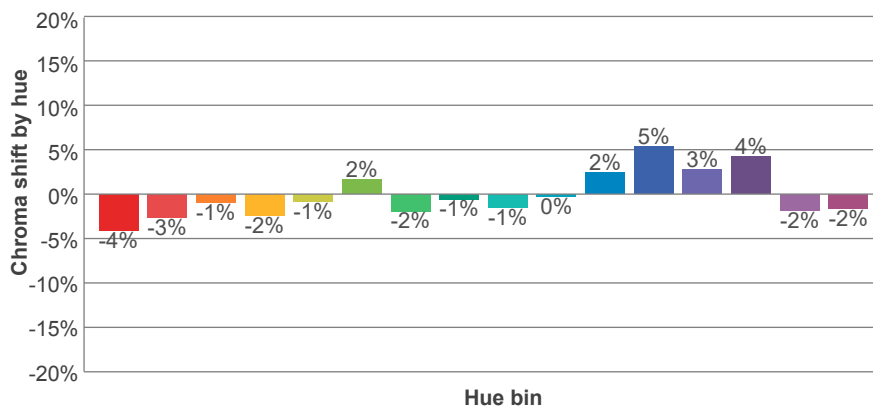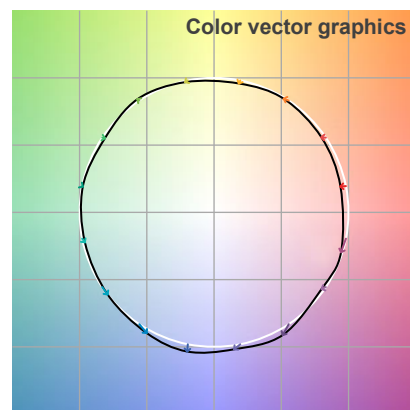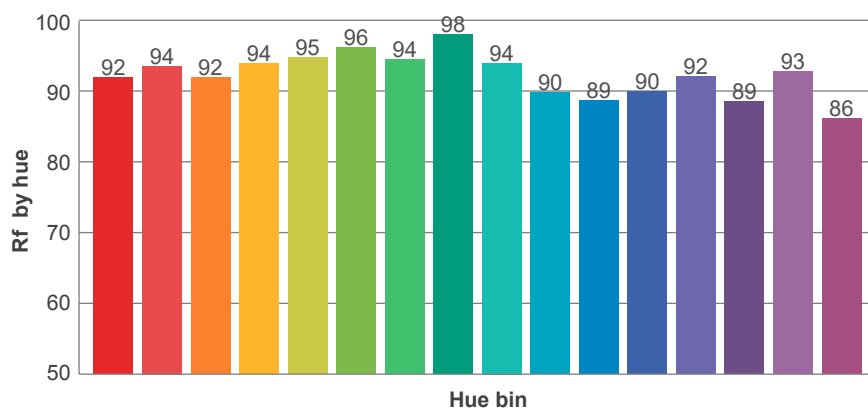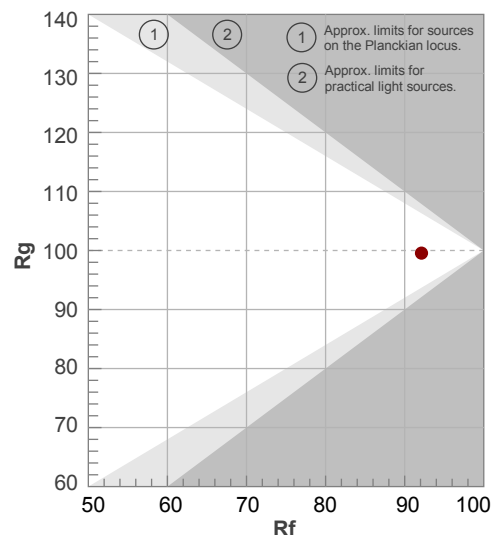

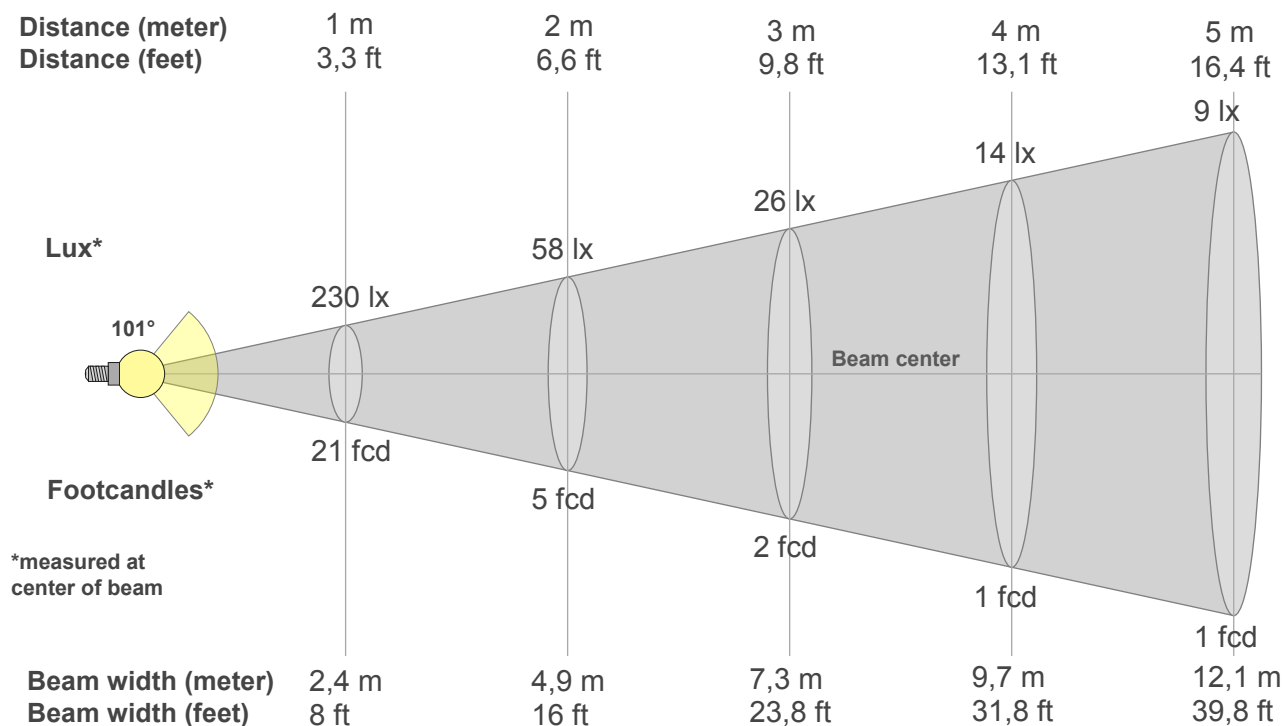

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
230lx	58lx	26lx	14lx	9lx	6lx	5lx	4lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx
21,4fcd	5,4fcd	2,4fcd	1,3fcd	0,9fcd	0,6fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
230	230	229	227	224	219	212	198	162	105	60	34	21	15	15	17	19	11	3	2
100%	100%	99%	98%	97%	95%	92%	86%	70%	46%	26%	15%	9%	7%	6%	7%	8%	5%	1%	1%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
230	230	228	225	220	213	205	195	183	169	152	132	110	87	63	41	23	10	2	0
100%	100%	99%	98%	95%	93%	89%	85%	80%	73%	66%	57%	48%	38%	27%	18%	10%	4%	1%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
230	230	229	227	224	219	212	198	162	105	60	34	21	15	15	17	19	11	3	2
100%	100%	99%	98%	97%	95%	92%	86%	70%	46%	26%	15%	9%	7%	6%	7%	8%	5%	1%	1%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
230	230	228	225	220	213	205	195	183	169	152	132	110	87	63	41	23	10	2	0
100%	100%	99%	98%	95%	93%	89%	85%	80%	73%	66%	57%	48%	38%	27%	18%	10%	4%	1%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
101°	134,8°	177,7°	86,4%	65,0%

ISO candela diagram

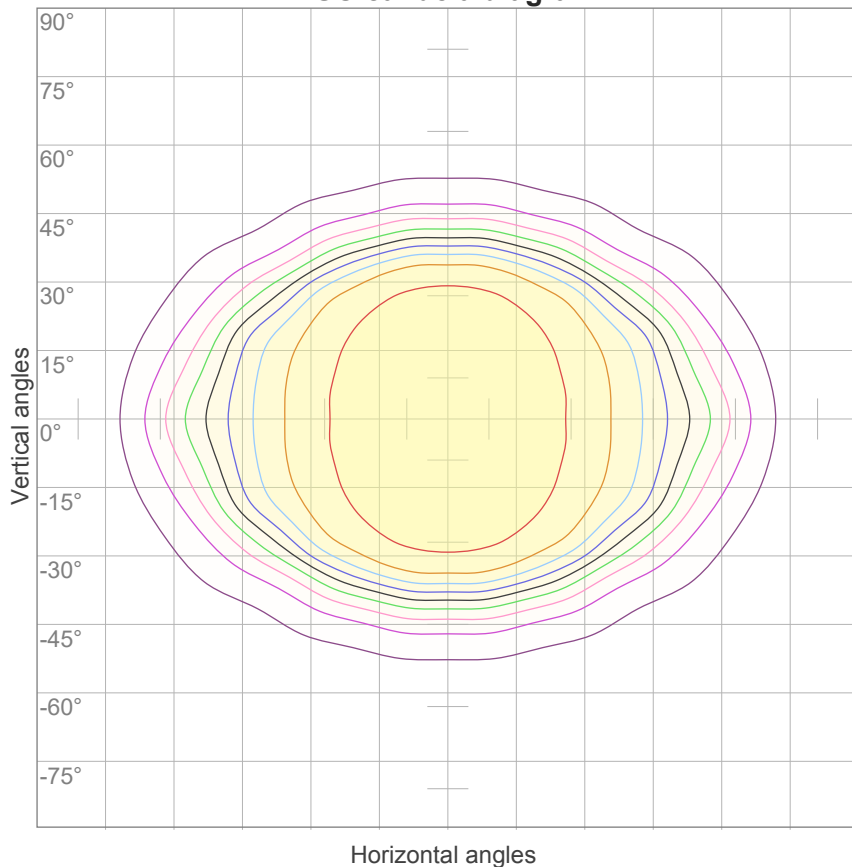


10%	23 cd
20%	46 cd
30%	69 cd
40%	92 cd
50%	115 cd
60%	138 cd
70%	161 cd
80%	184 cd
90%	207 cd

Conditions:

Number of c-planes: 16

Candela at center: 230 cd

ISO lux diagram

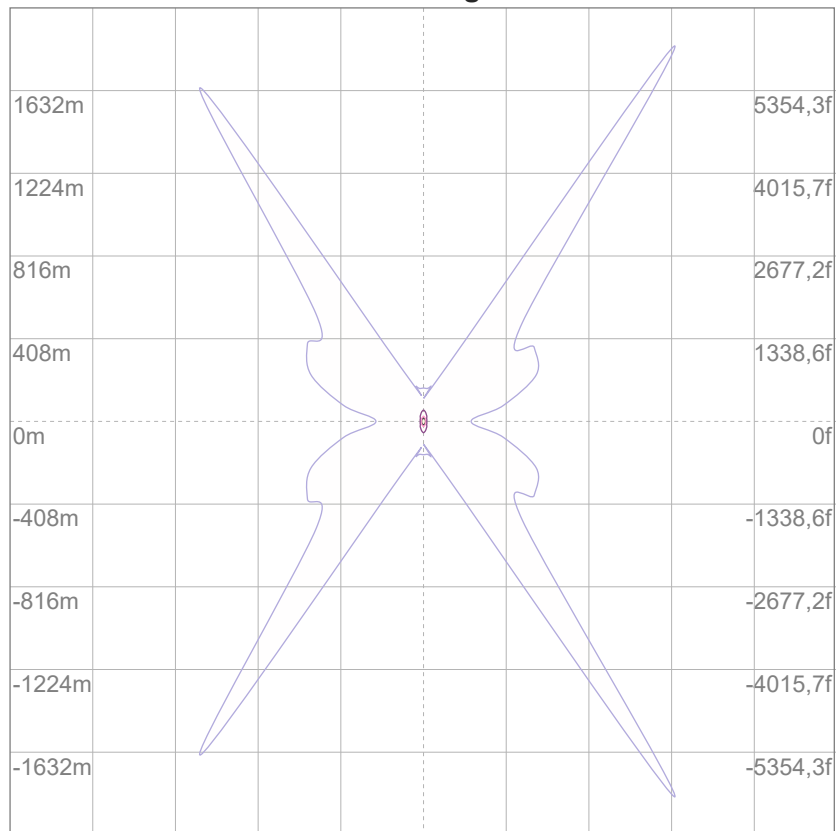

3%	69,1m lx
5%	0,115 lx
10%	0,230 lx
30%	0,691 lx
50%	1,15 lx

Conditions:

Number of c-planes: 16

Lux at center: 2,30 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	17,5	18,6	17,7	18,8	19,1	22,5	23,6	22,7	23,9	24,1
	3H	17,5	18,6	17,9	18,9	19,1	23,6	24,7	24,0	25,0	25,2
	4H	17,7	18,8	18,1	19,0	19,3	24,0	25,1	24,5	25,4	25,6
	6H	18,2	19,2	18,5	19,5	19,8	24,4	25,4	24,8	25,7	26,0
	8H	18,5	19,4	18,8	19,7	20,1	24,5	25,5	24,9	25,8	26,2
	12H	18,7	19,5	19,0	19,9	20,3	24,6	25,5	24,9	25,8	26,3
4H	2H	17,8	18,9	18,2	19,2	19,4	22,3	23,4	22,7	23,7	23,9
	3H	18,1	18,9	18,4	19,3	19,7	23,6	24,5	24,0	24,8	25,3
	4H	18,3	19,1	18,7	19,5	20,1	24,1	24,9	24,5	25,3	25,8
	6H	19,0	19,7	19,4	20,1	20,5	24,5	25,3	25,0	25,6	26,0
	8H	19,3	20,0	19,8	20,4	20,8	24,6	25,4	25,2	25,7	26,1
	12H	19,6	20,2	20,1	20,6	21,1	24,7	25,3	25,2	25,8	26,2
8H	4H	18,5	19,2	19,0	19,6	20,0	24,0	24,7	24,5	25,1	25,5
	6H	19,4	19,9	19,9	20,4	20,9	24,5	25,0	25,0	25,5	26,0
	8H	19,9	20,4	20,4	20,9	21,5	24,7	25,2	25,2	25,7	26,3
	12H	20,3	20,7	20,9	21,2	21,8	24,9	25,3	25,5	25,8	26,4
12H	4H	18,5	19,1	19,0	19,5	20,0	24,0	24,6	24,5	25,0	25,5
	6H	19,5	19,9	20,0	20,4	21,1	24,5	25,0	25,0	25,5	26,1
	8H	20,0	20,4	20,6	20,9	21,5	24,7	25,1	25,3	25,6	26,2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,5 / -0,9					0,2 / -0,2				
S = 1.5H		1,4 / -1,3					0,8 / -1,2				
S = 2.0H		2,4 / -1,6					1,8 / -2,3				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 569 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	110	105	101	98	107	103	99	96	99	96	93	94	92	90	91	89	87	85
2	101	94	87	82	98	92	86	81	88	83	79	84	81	77	81	78	75	73
3	93	83	76	70	90	82	75	69	79	73	68	76	71	67	73	69	66	63
4	86	75	67	61	83	73	66	60	71	64	59	68	63	58	66	61	57	55
5	79	67	59	53	77	66	59	53	64	57	52	62	56	51	60	55	51	49
6	74	61	53	47	72	60	52	47	58	51	46	57	50	46	55	49	45	43
7	68	56	47	42	67	55	47	42	53	46	41	52	45	41	50	45	40	39
8	64	51	43	37	62	50	43	37	49	42	37	48	41	37	46	41	36	35
9	60	47	39	34	58	46	39	34	45	38	34	44	38	33	43	37	33	31
10	56	43	36	31	55	43	36	31	42	35	31	41	35	30	40	34	30	28

LAMPS (number of lamps)


Luminaire budgetary diagram

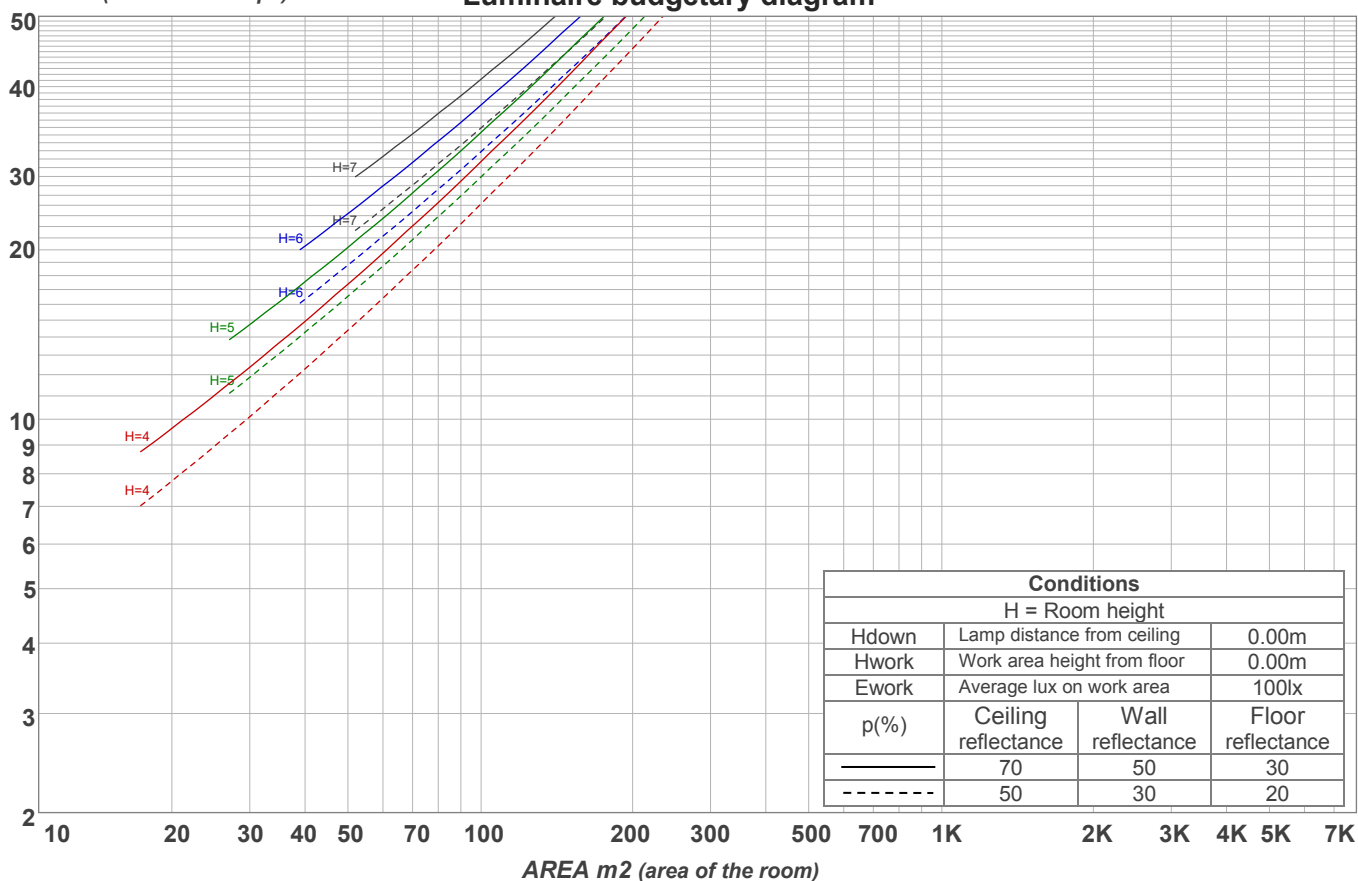

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
21,9 lm	63,8 lm	99,9 lm	124 lm	112 lm	70,0 lm	37,1 lm	21,4 lm	11,7 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2,07 lm	1,45 lm	1,12 lm	0,976 lm	0,702 lm	0,477 lm	0,352 lm	0,215 lm	0,072 lm

Warmup curve

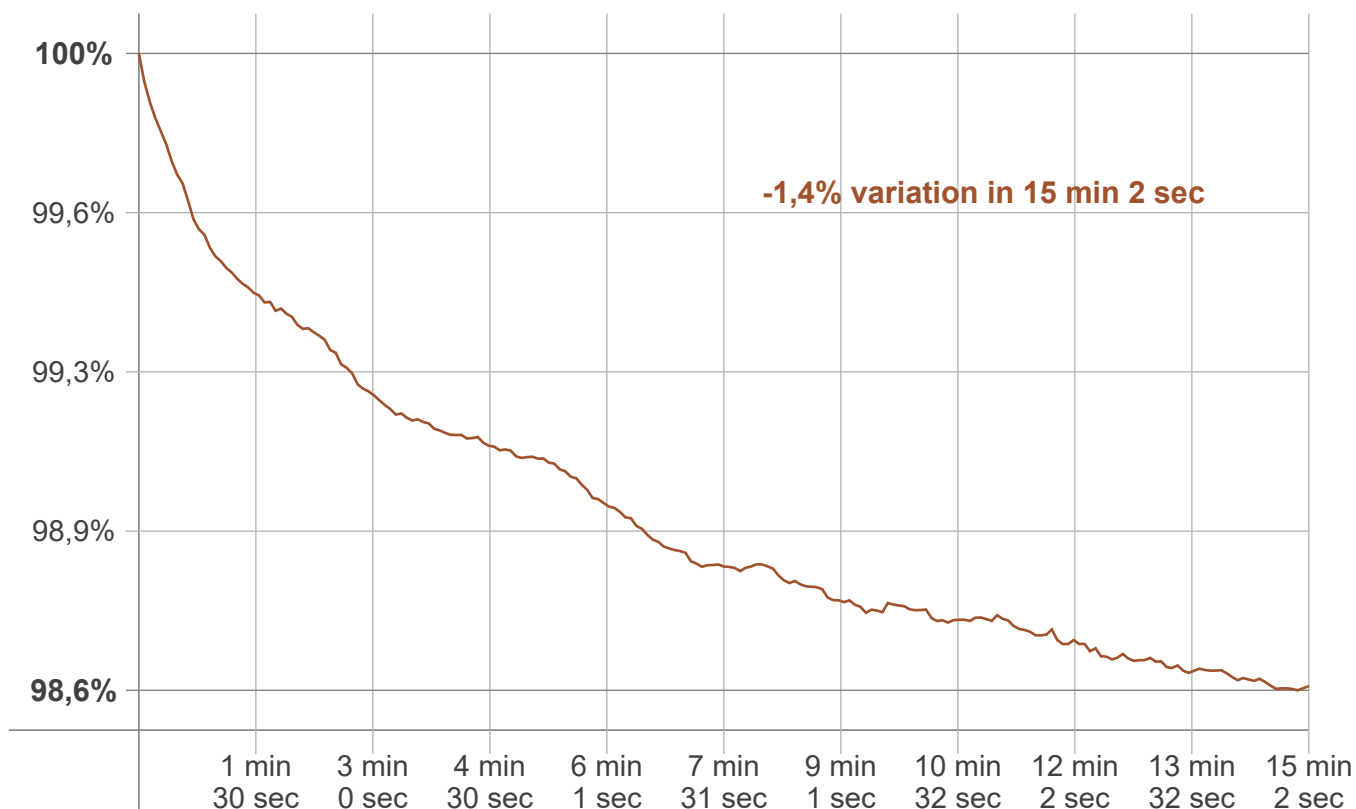

Warmup result

Warmup time:	Lamp stabilized in 15 min 2 sec
Warmup variation	-1,4%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2738 K	-3 K	2735 K

Output change

Output start	Output change	Output end
576 lm	-7 lm	569 lm