

Light efficiency:

125 Lumen/Watt

Light quality:

CRI: 94,7

Color temperature:


2742 K

Output: 602 lm

Peak: 420 cd

Power: 4,8 W

PF: 1,0

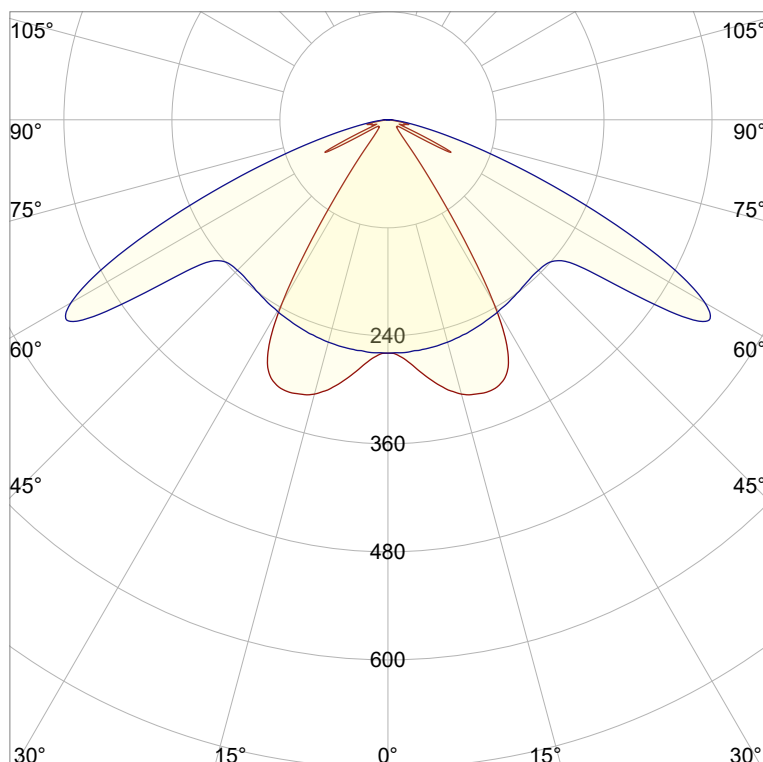

Product name:

Victory-7_510mm_927_Lens-60°-Transparent

Item number:

NP/L1C/03F/G1/L1C/0510/927/L6T

Date and time:

02.06.2022 14:23:05

Description:

Rank: C80-AD-8GB

Tolerances:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 Kelvin

CRI +/-0,7

Angular Resolution: 1 Degree Step

Last Calibration 20-09-2021

Tester: Peter Ulrich

Test Site: Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein




CIE 1931

x: 0,456



y: 0,408

Spectra

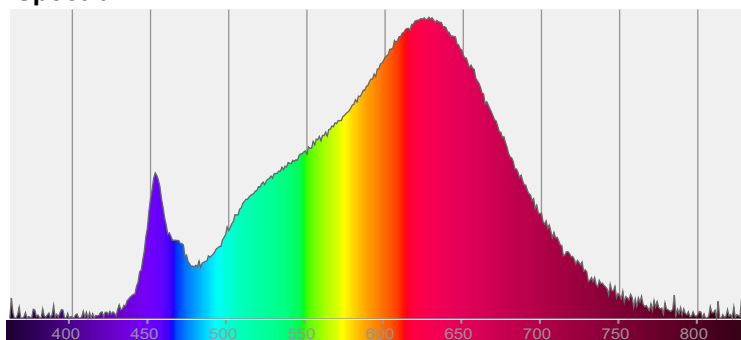


Power


Voltage: 48,0 V
Current: 0,100 A
Frequency: 0 Hz

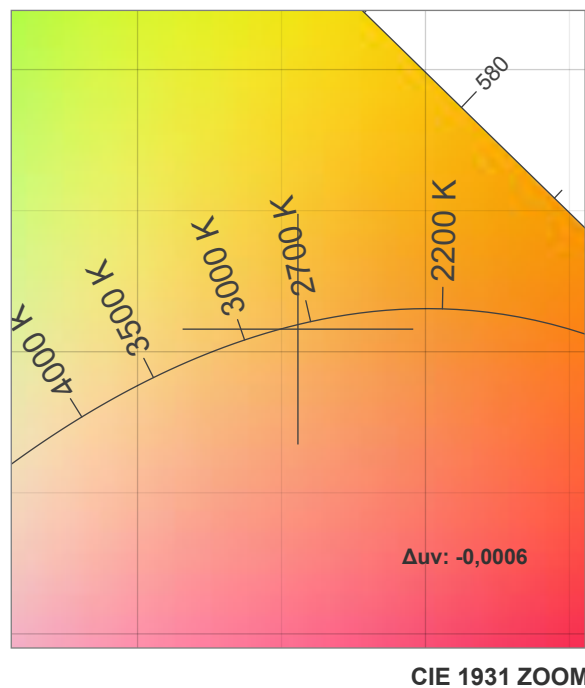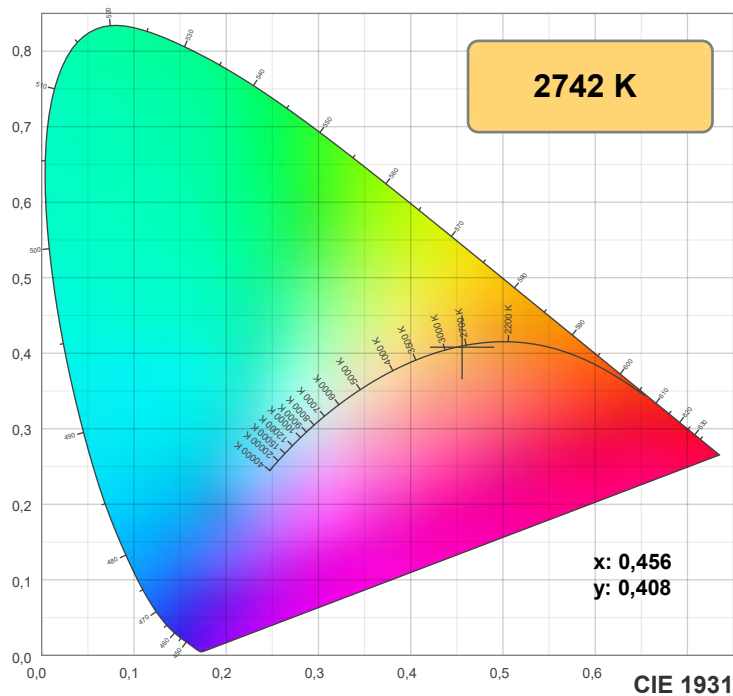

TM30: 92,3

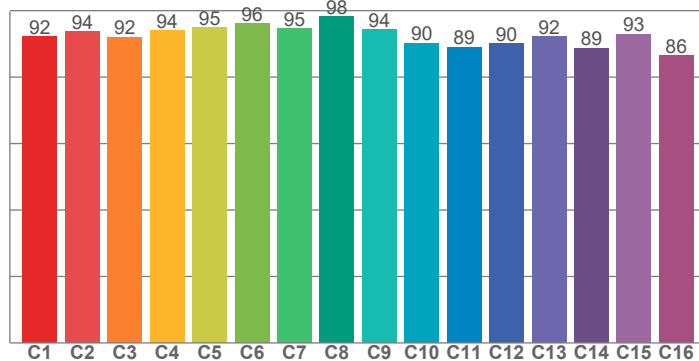

CRI: 94,7 (R1-R8)

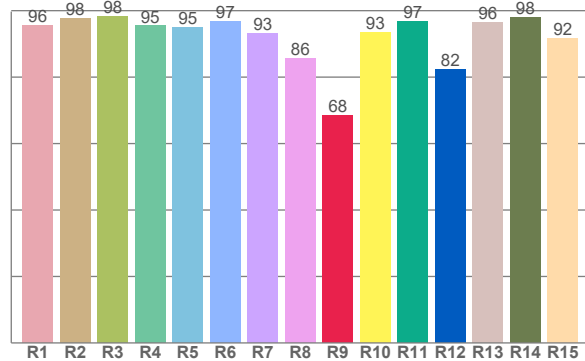

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,5	97,7	98,2	95,4	95,1	96,9	93,2	85,6	68,4	93,4	96,7	82,3	96,3	98,1	91,7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,2	93,7	92,1	94,1	94,8	96,0	94,5	98,2	94,3	90,3	89,1	90,1	92,1	88,8	93,0	86,5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,8	95,2	89,2	89,0	92,4	93,6	91,5	92,6	97,3	94,4	94,1	93,7	93,5	89,3	89,4

CQS: 91,8

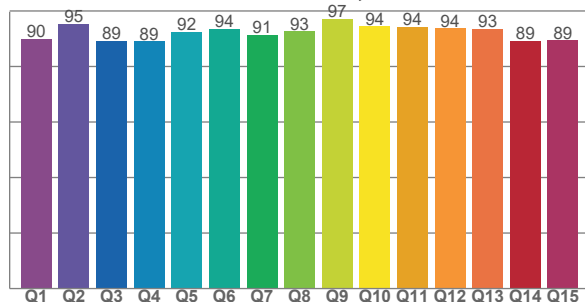

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2742 K	94,7	68,4	92,3	99,7	91,8	0,456	0,408	0,261	0,350	-0,0006







Rf 92,3


Fidelity index Rf

Rg 99,7

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	0%
2	94	-3%	2%
3	92	-1%	4%
4	94	-2%	1%
5	95	-1%	2%
6	96	2%	1%
7	95	-2%	-1%
8	98	0%	0%
9	94	-1%	3%
10	90	0%	6%
11	89	2%	8%
12	90	5%	1%
13	92	3%	-5%
14	89	4%	-8%
15	93	-2%	-3%
16	86	-2%	-10%

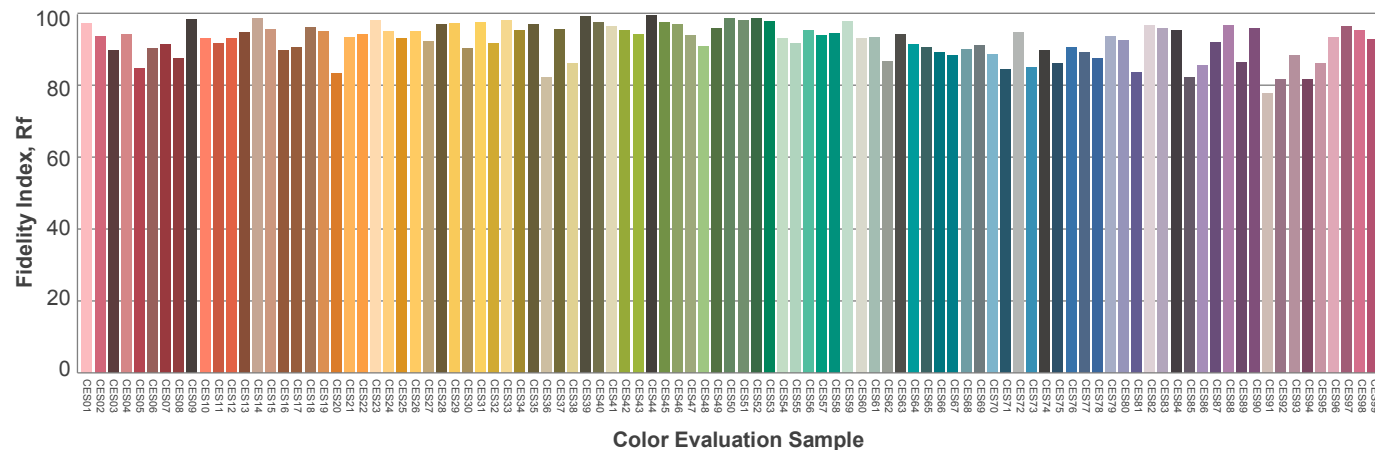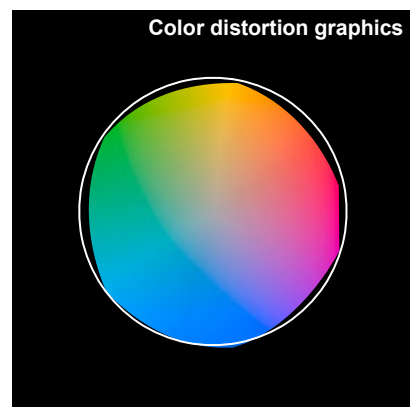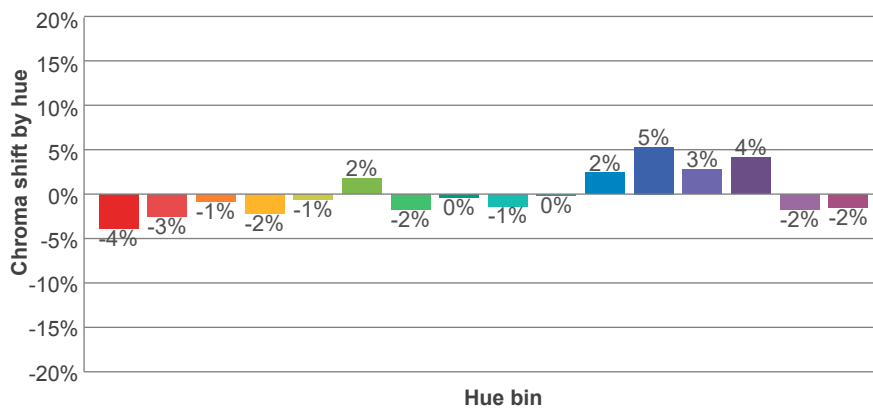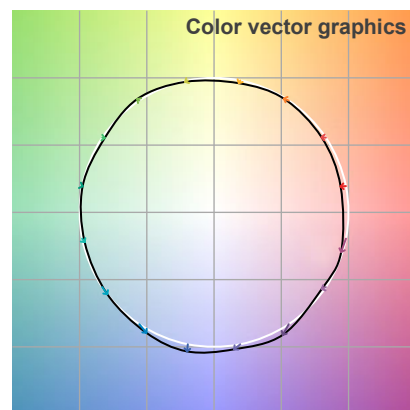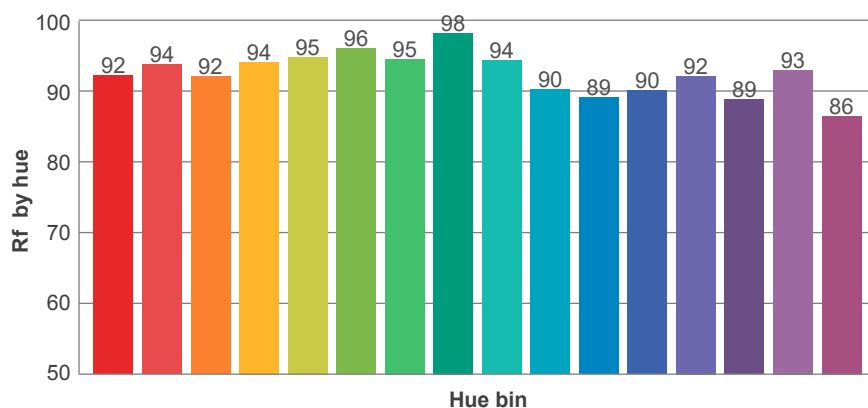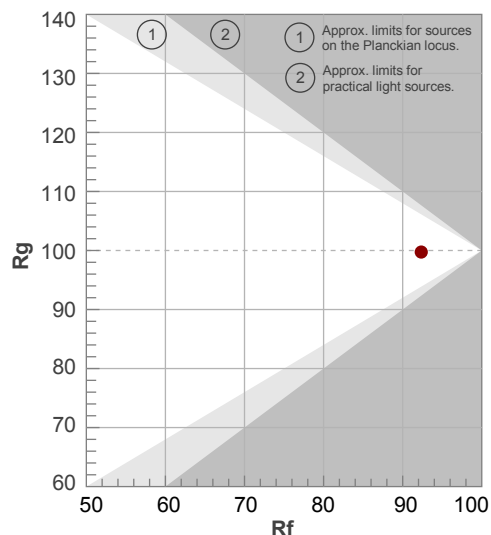

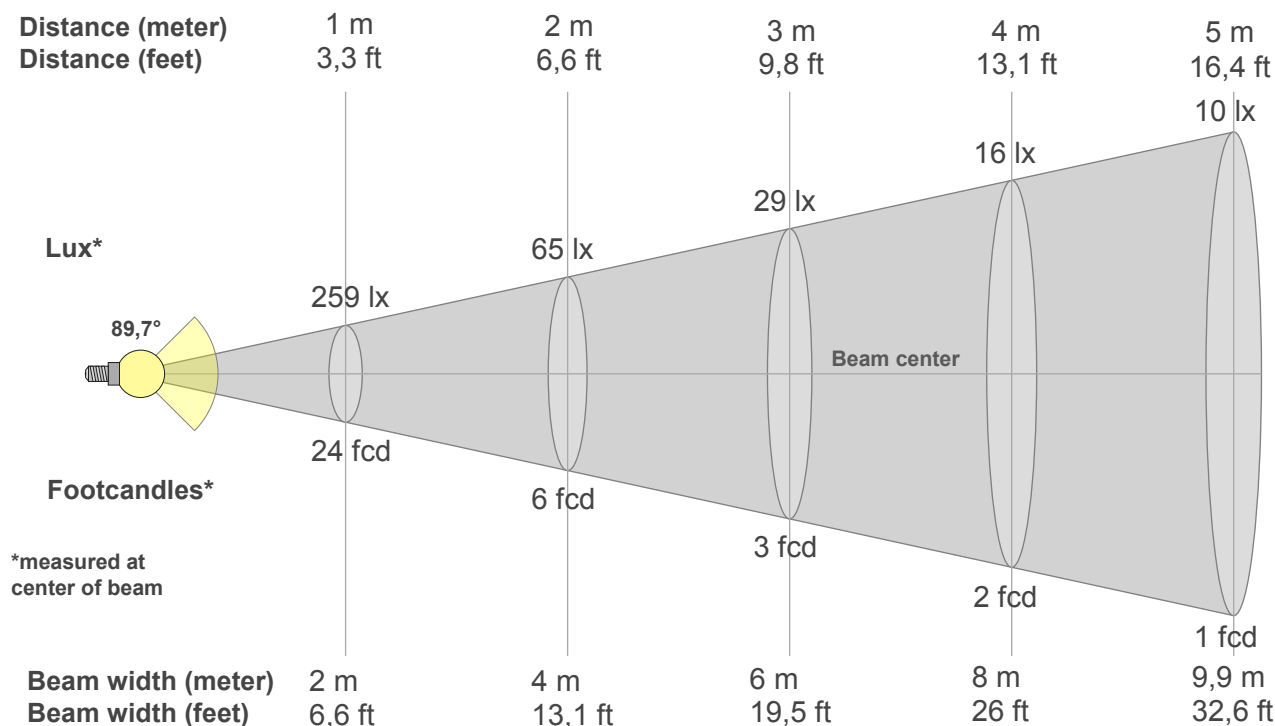

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
259lx	65lx	29lx	16lx	10lx	7lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx
24,1fcd	6fcd	2,7fcd	1,5fcd	1fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
259	271	296	315	322	311	235	87	27	16	13	13	27	43	15	20	15	4	1	0
100%	105%	114%	122%	124%	120%	91%	33%	10%	6%	5%	5%	11%	16%	6%	8%	6%	1%	0%	0%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
259	259	258	256	253	249	246	242	238	236	244	349	406	286	154	68	26	8	1	0
100%	100%	99%	99%	98%	96%	95%	93%	92%	91%	94%	135%	157%	110%	59%	26%	10%	3%	0%	0%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
259	271	296	315	322	311	235	87	27	16	13	13	27	43	15	20	15	4	1	0
100%	105%	114%	122%	124%	120%	91%	33%	10%	6%	5%	5%	11%	16%	6%	8%	6%	1%	0%	0%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
259	259	258	256	253	249	246	242	238	236	244	349	406	286	154	68	26	8	1	0
100%	100%	99%	99%	98%	96%	95%	93%	92%	91%	94%	135%	157%	110%	59%	26%	10%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
89,7°	128,4°	165,7°	85,3%	72,5%

ISO candela diagram

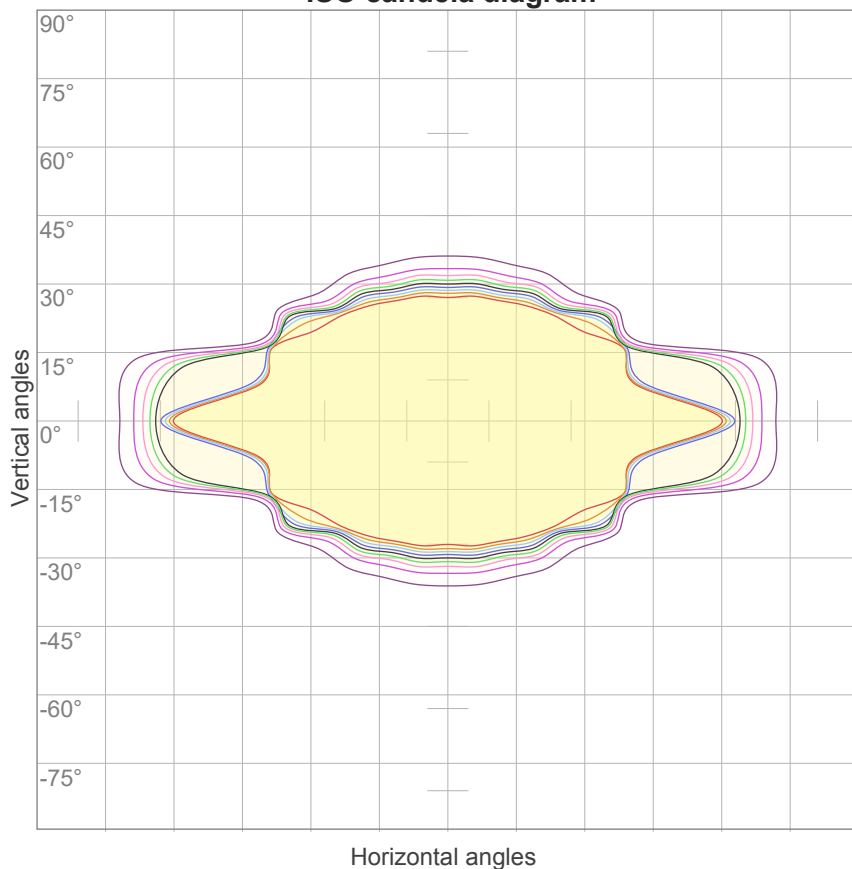


10%	26 cd
20%	52 cd
30%	78 cd
40%	104 cd
50%	130 cd
60%	155 cd
70%	181 cd
80%	207 cd
90%	233 cd

Conditions:

Number of c-planes: 16

Candela at center: 259 cd

ISO lux diagram

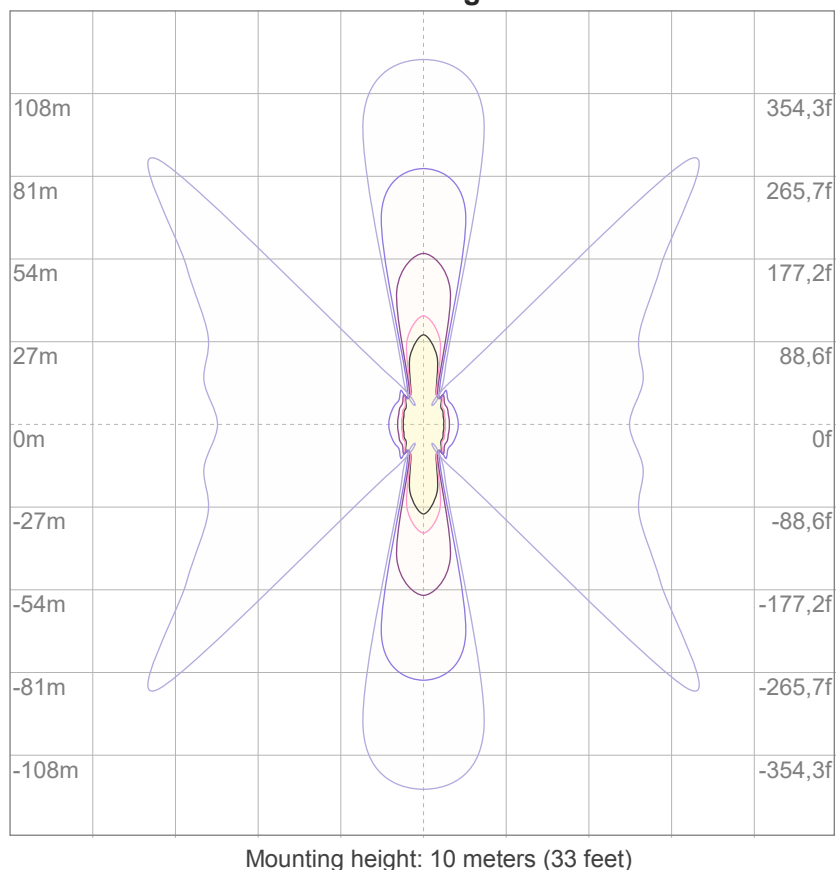

3%	77,7m lx
5%	0,130 lx
10%	0,259 lx
30%	0,777 lx
50%	1,30 lx

Conditions:

Number of c-planes: 16

Lux at center: 2,59 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	14,3	15,3	14,5	15,6	15,8	25,9	26,9	26,0	27,2	27,4
	3H	15,7	16,8	16,1	17,0	17,2	27,5	28,6	27,9	28,9	29,1
	4H	16,1	17,2	16,6	17,5	17,7	27,8	28,9	28,2	29,1	29,4
	6H	17,0	17,9	17,3	18,1	18,5	28,0	28,9	28,3	29,2	29,6
	8H	17,0	17,9	17,4	18,2	18,6	28,0	28,9	28,3	29,2	29,6
	12H	17,0	17,8	17,4	18,2	18,6	28,0	28,8	28,3	29,2	29,6
4H	2H	14,5	15,5	14,9	15,8	16,0	25,5	26,6	25,9	26,8	27,1
	3H	16,3	17,1	16,6	17,4	17,9	27,3	28,2	27,7	28,5	29,0
	4H	16,8	17,6	17,2	18,0	18,5	27,6	28,4	28,0	28,8	29,3
	6H	17,8	18,6	18,3	18,9	19,3	27,7	28,5	28,2	28,8	29,2
	8H	17,9	18,6	18,4	19,0	19,3	27,7	28,4	28,3	28,8	29,2
	12H	17,9	18,5	18,4	18,9	19,4	27,7	28,3	28,2	28,7	29,2
8H	4H	17,0	17,7	17,5	18,0	18,4	27,5	28,2	28,0	28,5	28,9
	6H	18,2	18,7	18,7	19,2	19,7	27,7	28,2	28,2	28,6	29,2
	8H	18,4	18,8	18,9	19,4	20,0	27,7	28,2	28,2	28,7	29,3
	12H	18,4	18,8	19,0	19,3	19,9	27,7	28,1	28,3	28,6	29,2
12H	4H	17,0	17,5	17,5	18,0	18,4	27,4	28,0	27,9	28,4	28,9
	6H	18,3	18,7	18,8	19,3	19,9	27,6	28,1	28,2	28,6	29,2
	8H	18,5	18,9	19,1	19,4	20,0	27,7	28,0	28,3	28,6	29,2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,7 / -1,3					1,5 / -2,4				
S = 1.5H		2,5 / -1,7					3,2 / -5,5				
S = 2.0H		2,7 / -1,8					4,8 / -7,9				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 602 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	110	106	103	99	108	104	101	98	100	97	94	96	94	92	92	90	89	87
2	102	95	89	84	99	93	88	83	89	85	81	86	82	79	83	80	77	75
3	94	85	78	72	92	84	77	72	81	75	70	78	73	69	75	71	68	66
4	87	77	69	63	85	76	68	63	73	67	62	71	66	61	69	64	60	58
5	81	70	62	56	79	69	61	56	67	60	55	65	59	55	63	58	54	52
6	76	64	56	50	74	63	55	50	61	54	50	60	54	49	58	53	49	47
7	71	59	51	45	69	58	50	45	56	50	45	55	49	44	54	48	44	42
8	66	54	46	41	65	53	46	41	52	45	41	51	45	40	50	44	40	38
9	62	50	43	37	61	49	42	37	48	42	37	47	41	37	46	41	37	35
10	59	46	39	34	57	46	39	34	45	39	34	44	38	34	43	38	34	32

LAMPS (number of lamps)


Luminaire budgetary diagram

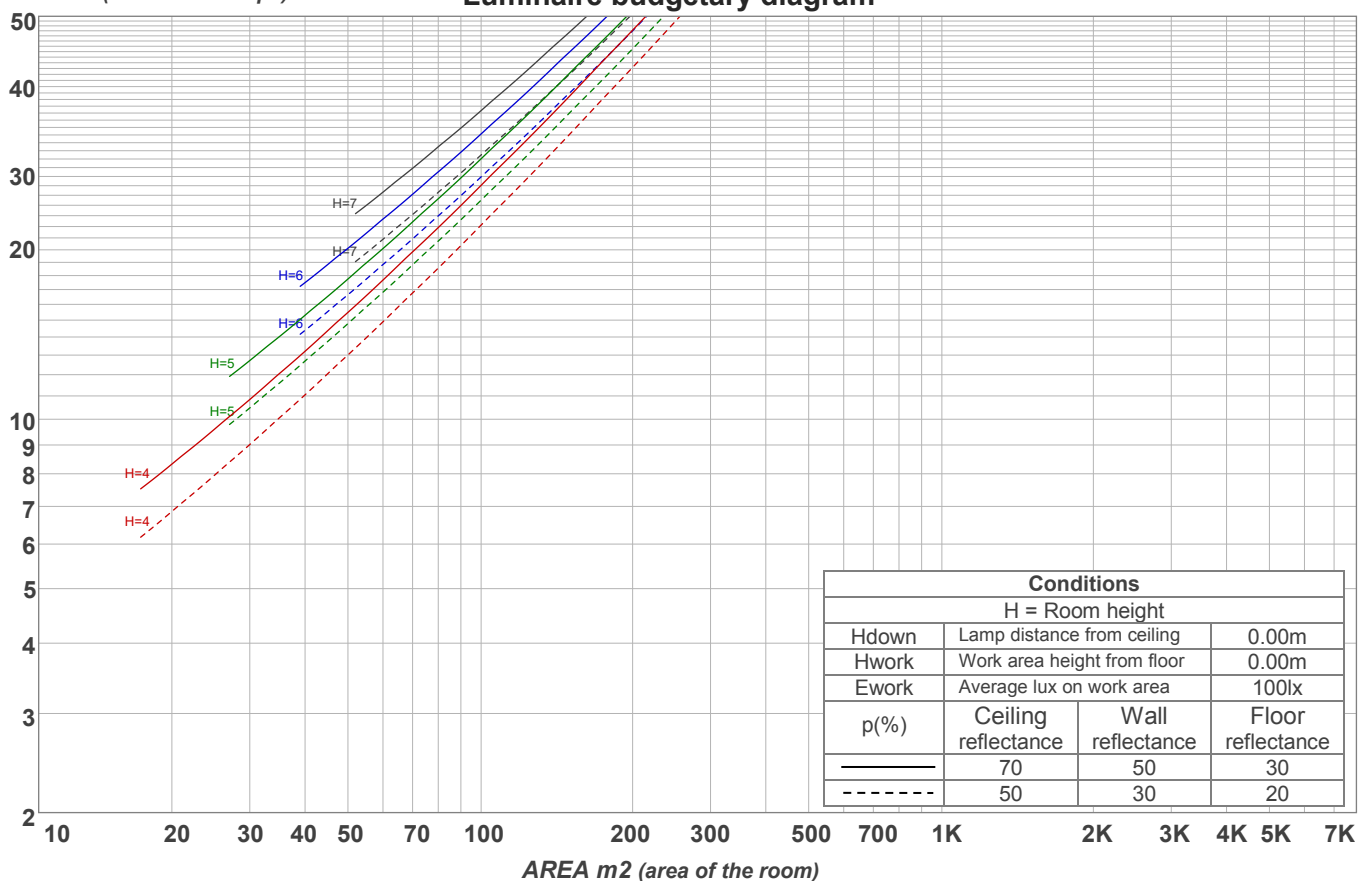

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
25,3 lm	81,5 lm	138 lm	141 lm	80,5 lm	47,8 lm	54,5 lm	23,1 lm	7,45 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,02 lm	0,619 lm	0,272 lm	0,246 lm	0,213 lm	0,172 lm	0,127 lm	0,078 lm	0,741 lm

Warmup curve

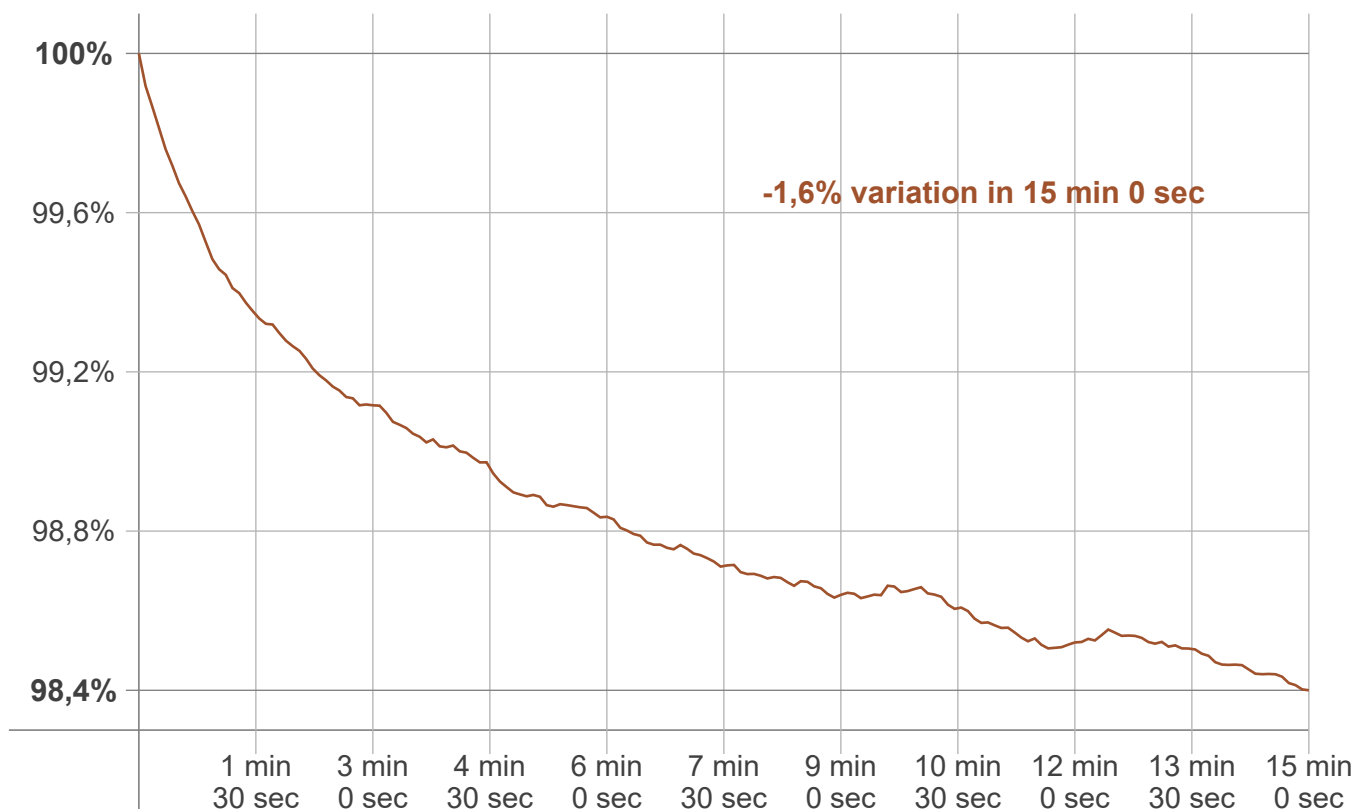

Warmup result

Warmup time:	Lamp stabilized in 15 min 0 sec
Warmup variation	-1,6%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2744 K	-2 K	2742 K

Output change

Output start	Output change	Output end
610 lm	-8 lm	602 lm