



Light efficiency:

94 Lumen/Watt

Light quality:

CRI: 94,5

Color temperature:

2743 K

Output: 226 lm

Peak: 439 cd

Power: 2,4 W

PF: 1,0



Product name:

Sta-Maria-6_510mm_927_Inlay-Lens-15-Grad

Item number:

NP/L1C/01E/0510/927/IL1F

Date and time:

17.07.2025 16:57:28

Description:

Rank: C80-AC-8GB

Tolerances:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 Kelvin

CRI +/-0,7

Angular Resolution: 1 Degree Step


Last Calibration 13.10.2023

Tester: Peter Ulrich

Test Site: Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein

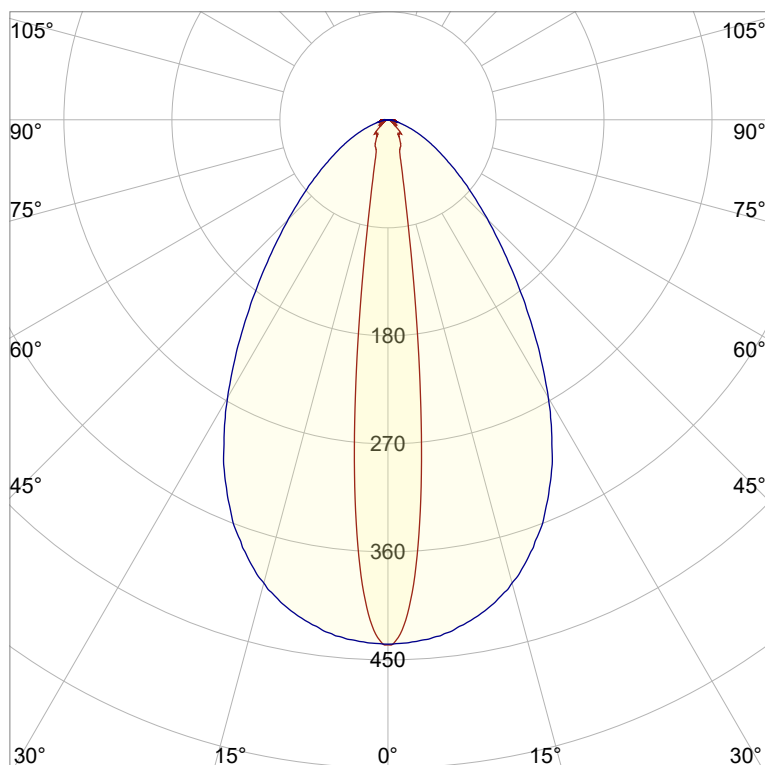


CIE 1931

x: 0,454



y: 0,406

Spectra

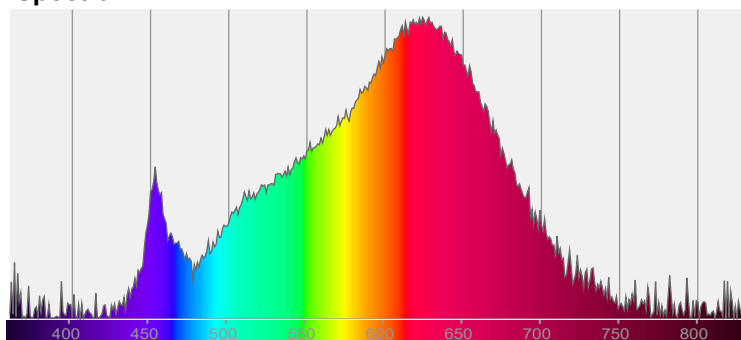


Power


Voltage: 48,0 V
Current: 0,050 A
Frequency: 0 Hz

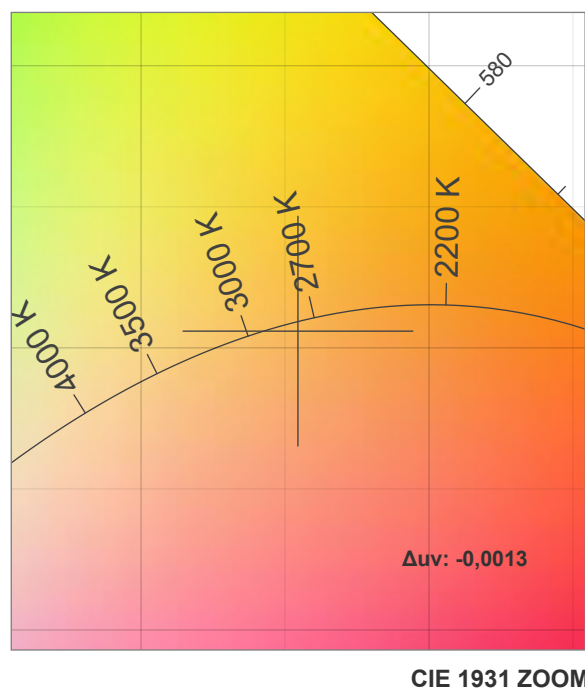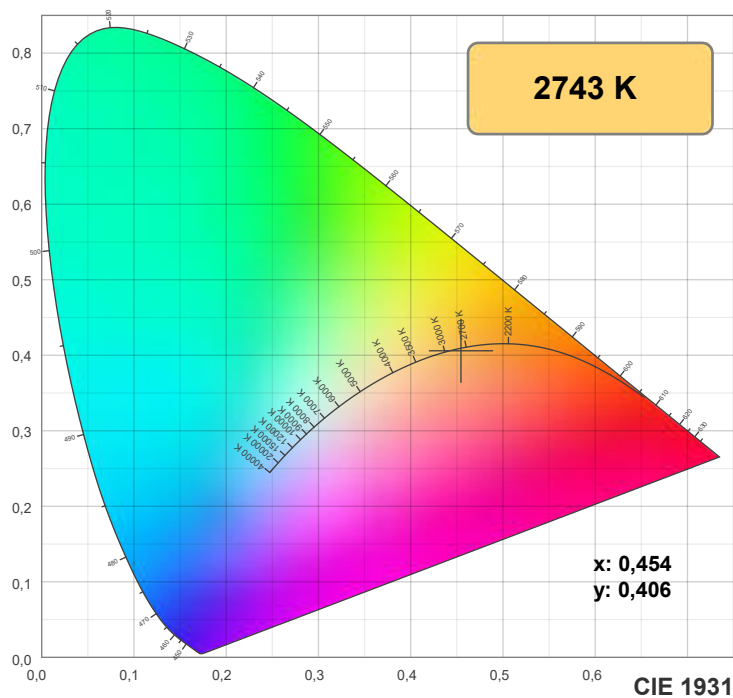

TM30: 92,6

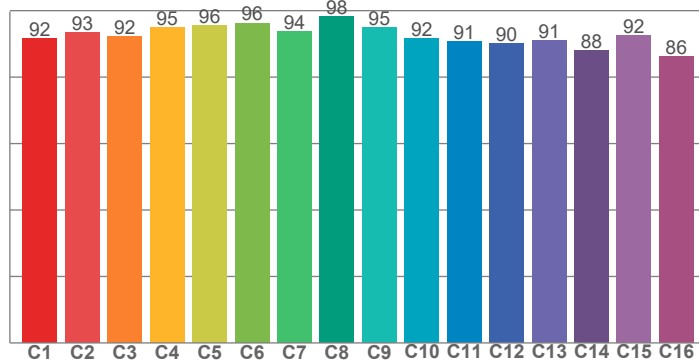

CRI: 94,5 (R1-R8)

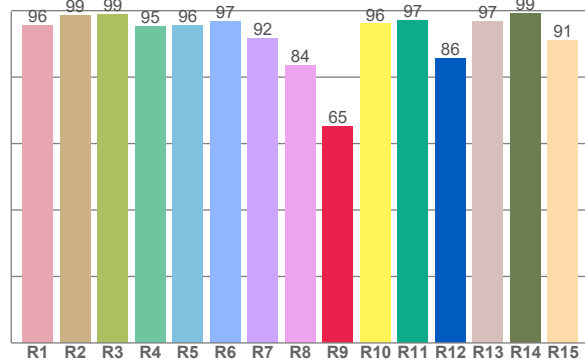

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,6	98,6	98,8	95,3	95,7	96,9	91,7	83,6	65,2	96,0	97,1	85,6	96,7	99,3	91,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,8	93,5	92,2	95,0	95,6	96,3	93,7	98,2	94,9	91,7	90,8	90,1	90,9	88,0	92,4	86,2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,9	94,8	90,6	90,4	93,3	94,4	92,3	92,5	96,4	95,1	94,2	93,2	92,6	88,4	88,4

CQS: 91,8

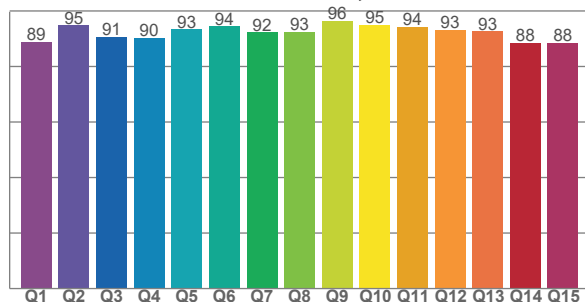

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2743 K	94,5	65,2	92,6	99,5	91,8	0,454	0,406	0,261	0,350	-0,0013



TM30 details









Rf 92,6


Fidelity index Rf

Rg 99,5

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	1%
2	93	-3%	2%
3	92	-1%	4%
4	95	-2%	0%
5	96	-1%	2%
6	96	1%	0%
7	94	-2%	0%
8	98	0%	0%
9	95	-1%	3%
10	92	0%	5%
11	91	3%	6%
12	90	5%	-1%
13	91	3%	-6%
14	88	3%	-9%
15	92	-2%	-3%
16	86	-3%	-10%

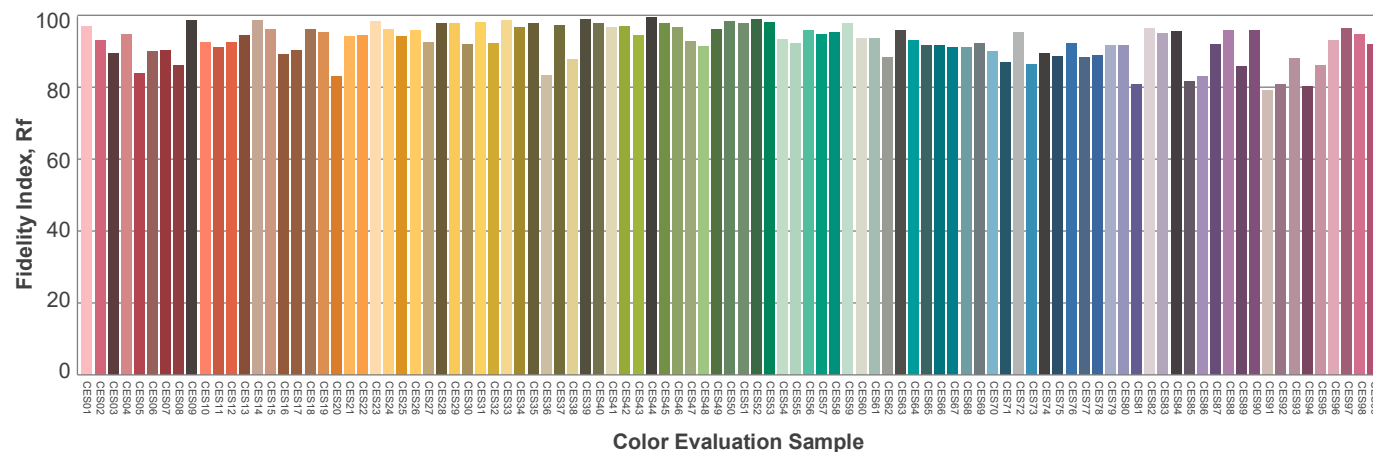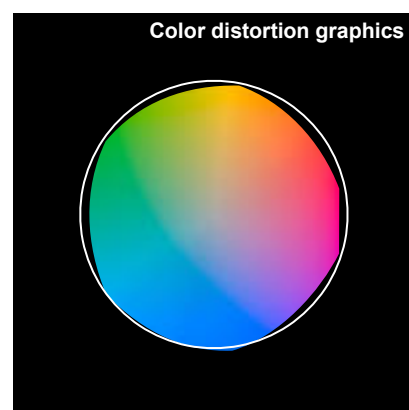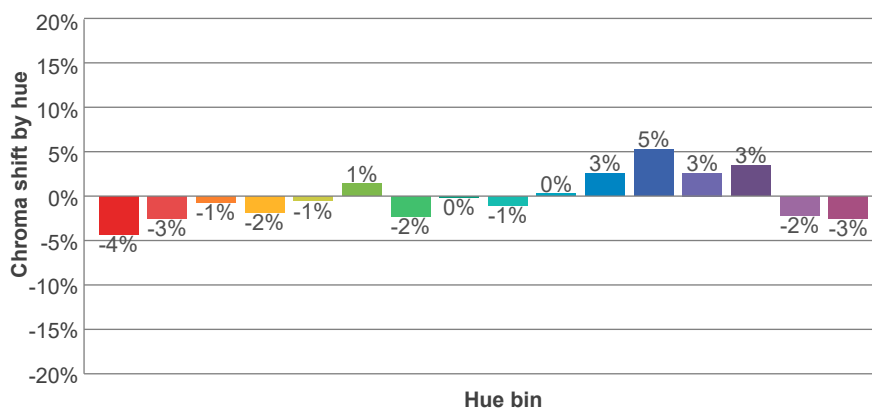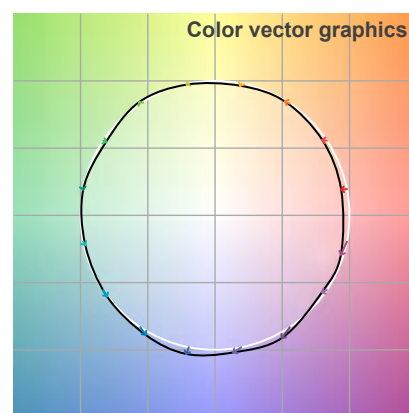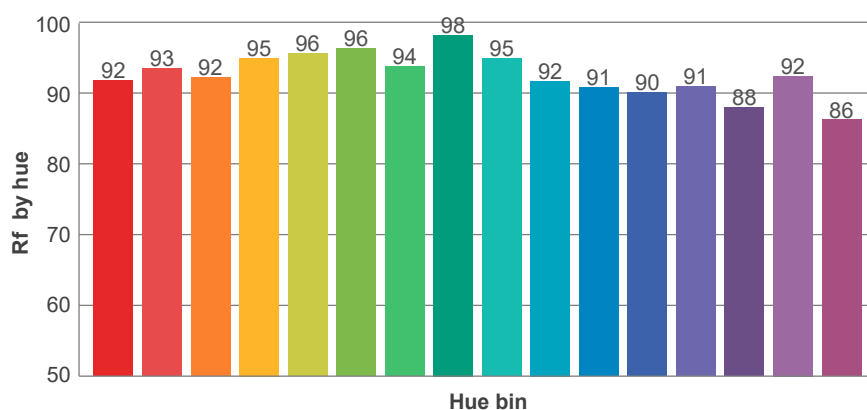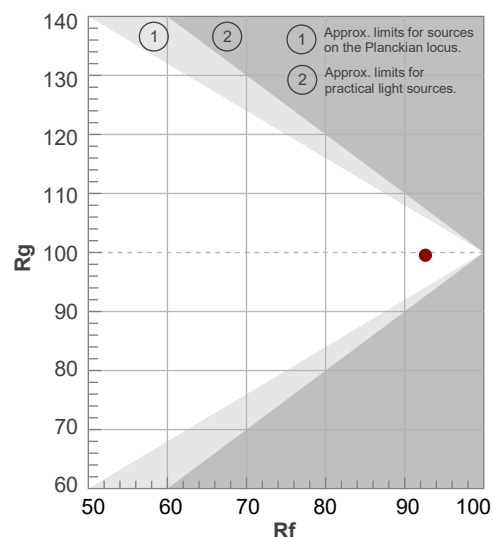

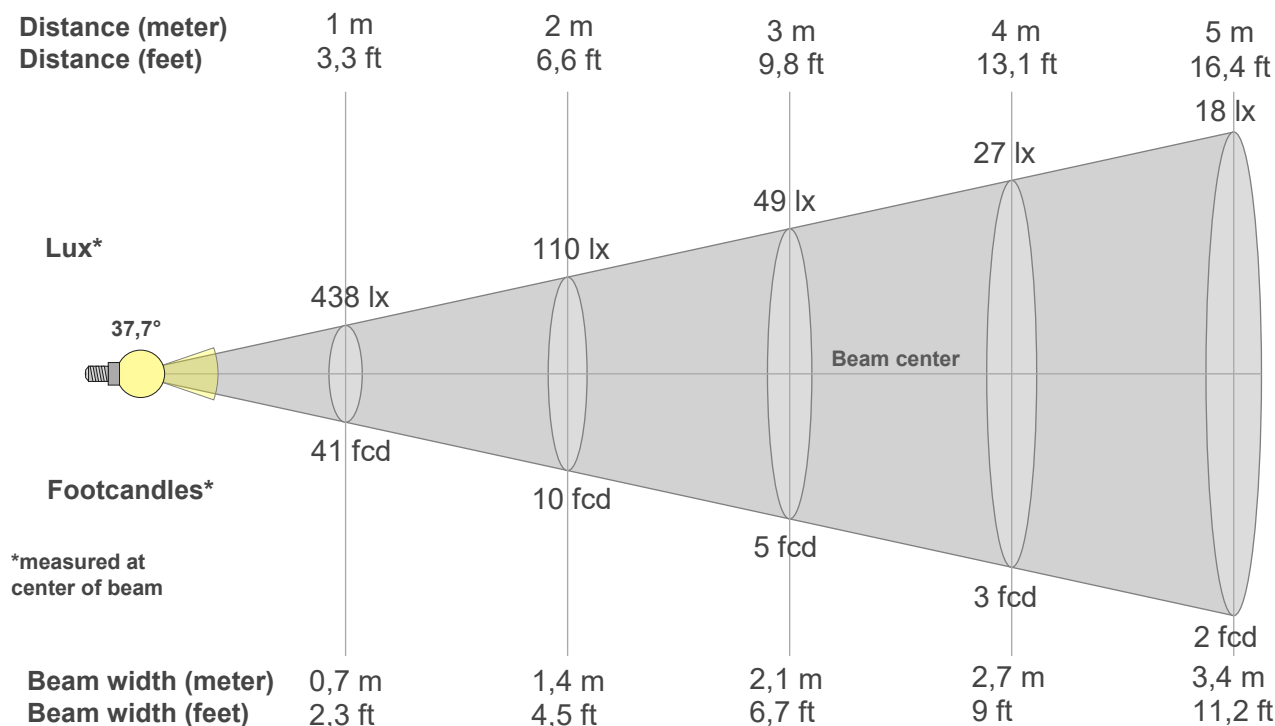

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
438lx	110lx	49lx	27lx	18lx	12lx	9lx	7lx	5lx	4lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx
40,7fcd	10,2fcd	4,5fcd	2,5fcd	1,6fcd	1,1fcd	0,8fcd	0,6fcd	0,5fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
438	418	357	267	174	109	72	53	41	33	29	27	25	24	23	20	18	16	15	15
100%	95%	82%	61%	40%	25%	16%	12%	9%	8%	7%	6%	6%	6%	5%	5%	4%	4%	3%	3%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
438	436	434	432	426	421	414	405	395	381	367	350	332	312	290	267	244	220	198	177
100%	100%	99%	99%	97%	96%	94%	92%	90%	87%	84%	80%	76%	71%	66%	61%	56%	50%	45%	40%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
438	418	357	267	174	109	72	53	41	33	29	27	25	24	23	20	18	16	15	15
100%	95%	82%	61%	40%	25%	16%	12%	9%	8%	7%	6%	6%	6%	5%	5%	4%	4%	3%	3%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
438	436	434	432	426	421	414	405	395	381	367	350	332	312	290	267	244	220	198	177
100%	100%	99%	99%	97%	96%	94%	92%	90%	87%	84%	80%	76%	71%	66%	61%	56%	50%	45%	40%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
37,7°	84,8°	131,3°	87,4%	73,3%

ISO candela diagram

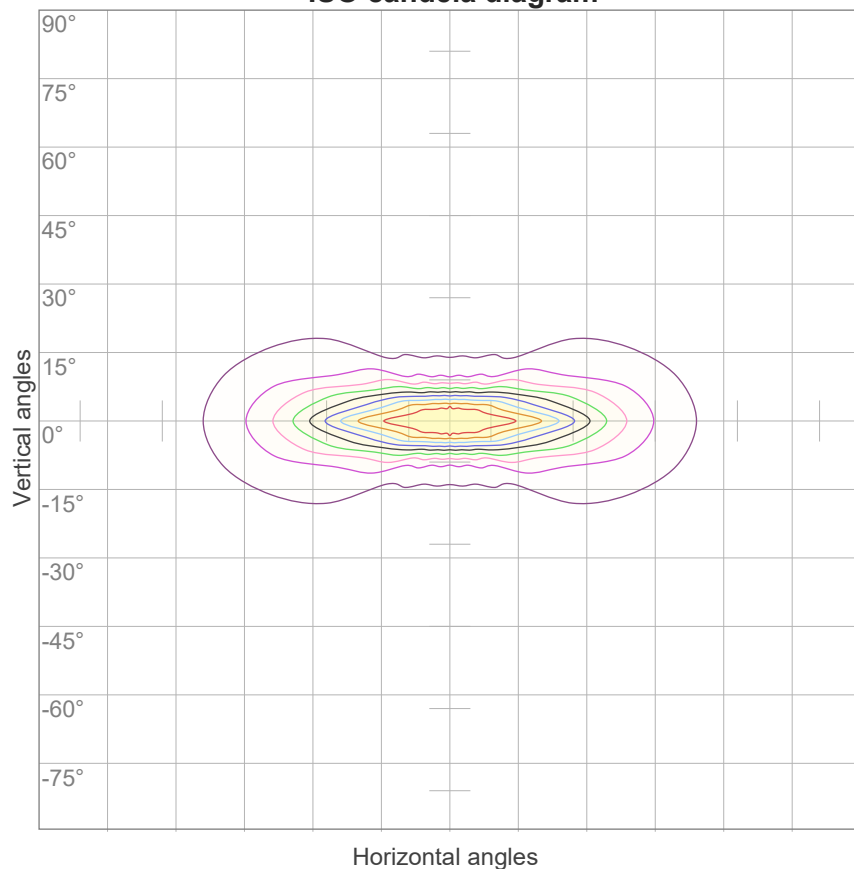


10%	44 cd
20%	88 cd
30%	131 cd
40%	175 cd
50%	219 cd
60%	263 cd
70%	307 cd
80%	350 cd
90%	394 cd

Conditions:

Number of c-planes: 16

Candela at center: 438 cd

ISO lux diagram

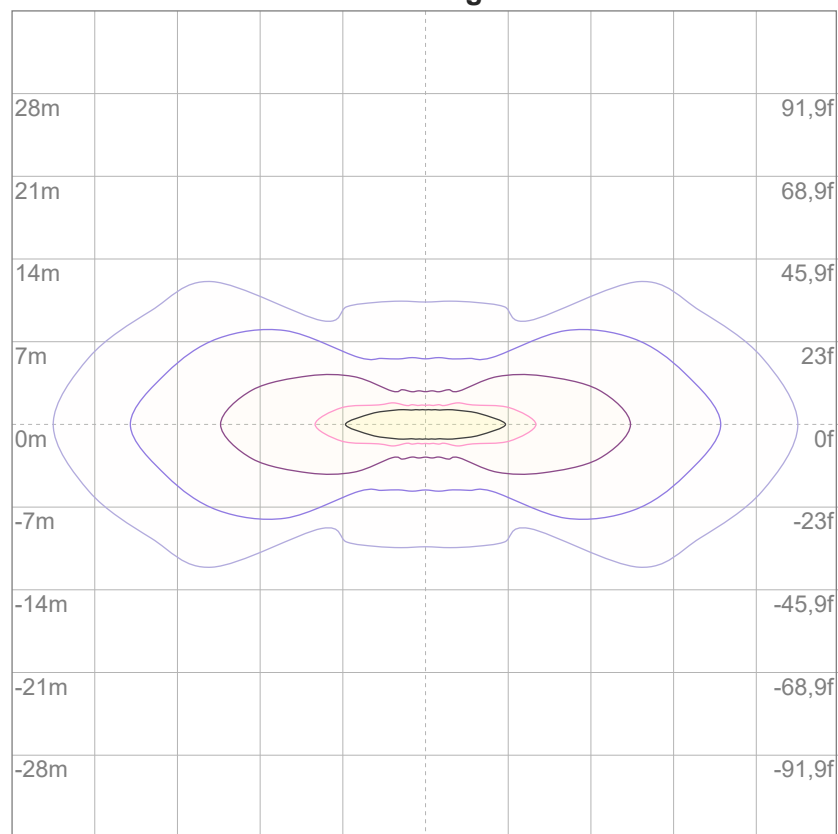

3%	0,131 lx
5%	0,219 lx
10%	0,438 lx
30%	1,31 lx
50%	2,19 lx

Conditions:

Number of c-planes: 16

Lux at center: 4,38 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	7,0	7,8	7,1	8,1	8,3	19,0	19,9	19,2	20,1	20,3
	3H	8,1	9,1	8,5	9,3	9,5	19,7	20,6	20,1	20,9	21,1
	4H	9,2	10,2	9,6	10,4	10,6	19,9	20,8	20,3	21,1	21,3
	6H	10,7	11,5	11,0	11,8	12,2	20,0	20,8	20,3	21,1	21,5
	8H	11,4	12,2	11,8	12,5	12,9	20,0	20,8	20,4	21,1	21,5
	12H	12,1	12,9	12,5	13,2	13,7	20,0	20,8	20,4	21,1	21,6
4H	2H	8,8	9,7	9,2	10,0	10,2	18,7	19,7	19,1	19,9	20,2
	3H	10,0	10,8	10,4	11,1	11,6	19,6	20,4	20,0	20,7	21,2
	4H	11,0	11,7	11,4	12,1	12,7	19,8	20,5	20,3	21,0	21,5
	6H	12,4	13,1	12,9	13,5	13,8	20,0	20,7	20,5	21,1	21,4
	8H	13,2	13,8	13,7	14,2	14,6	20,0	20,7	20,6	21,0	21,4
	12H	13,9	14,4	14,4	14,9	15,3	20,0	20,6	20,5	21,0	21,5
8H	4H	11,7	12,4	12,2	12,7	13,1	19,8	20,4	20,3	20,8	21,2
	6H	13,4	13,8	13,9	14,3	14,8	20,0	20,5	20,5	20,9	21,5
	8H	14,3	14,7	14,8	15,2	15,9	20,1	20,5	20,6	21,0	21,7
	12H	15,2	15,6	15,8	16,1	16,7	20,2	20,5	20,8	21,0	21,6
12H	4H	11,8	12,3	12,3	12,8	13,2	19,7	20,3	20,2	20,7	21,2
	6H	13,6	14,0	14,1	14,5	15,2	20,0	20,4	20,6	21,0	21,6
	8H	14,6	14,9	15,2	15,4	16,1	20,1	20,5	20,7	21,0	21,6
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,2 / -0,2					1,1 / -1,0				
S = 1.5H		0,3 / -0,2					2,5 / -2,2				
S = 2.0H		0,5 / -0,4					3,8 / -3,5				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 226 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	111	107	103	100	108	104	101	99	100	97	95	96	94	92	92	90	89	87
2	103	97	91	87	101	95	90	86	91	87	84	88	84	81	85	82	79	77
3	97	88	82	77	94	87	81	76	84	79	75	81	77	73	78	75	72	70
4	91	81	74	69	88	80	73	68	77	72	67	75	70	66	73	69	65	63
5	85	75	68	63	83	74	67	62	72	66	61	70	65	61	68	63	60	58
6	80	70	63	57	79	69	62	57	67	61	56	65	60	56	64	59	55	54
7	76	65	58	53	74	64	58	53	63	57	52	61	56	52	60	55	51	50
8	72	61	54	49	71	60	54	49	59	53	49	58	52	48	57	52	48	47
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44
10	65	54	48	43	64	54	48	43	53	47	43	52	47	43	51	46	43	41

LAMPS (number of lamps)


Luminaire budgetary diagram

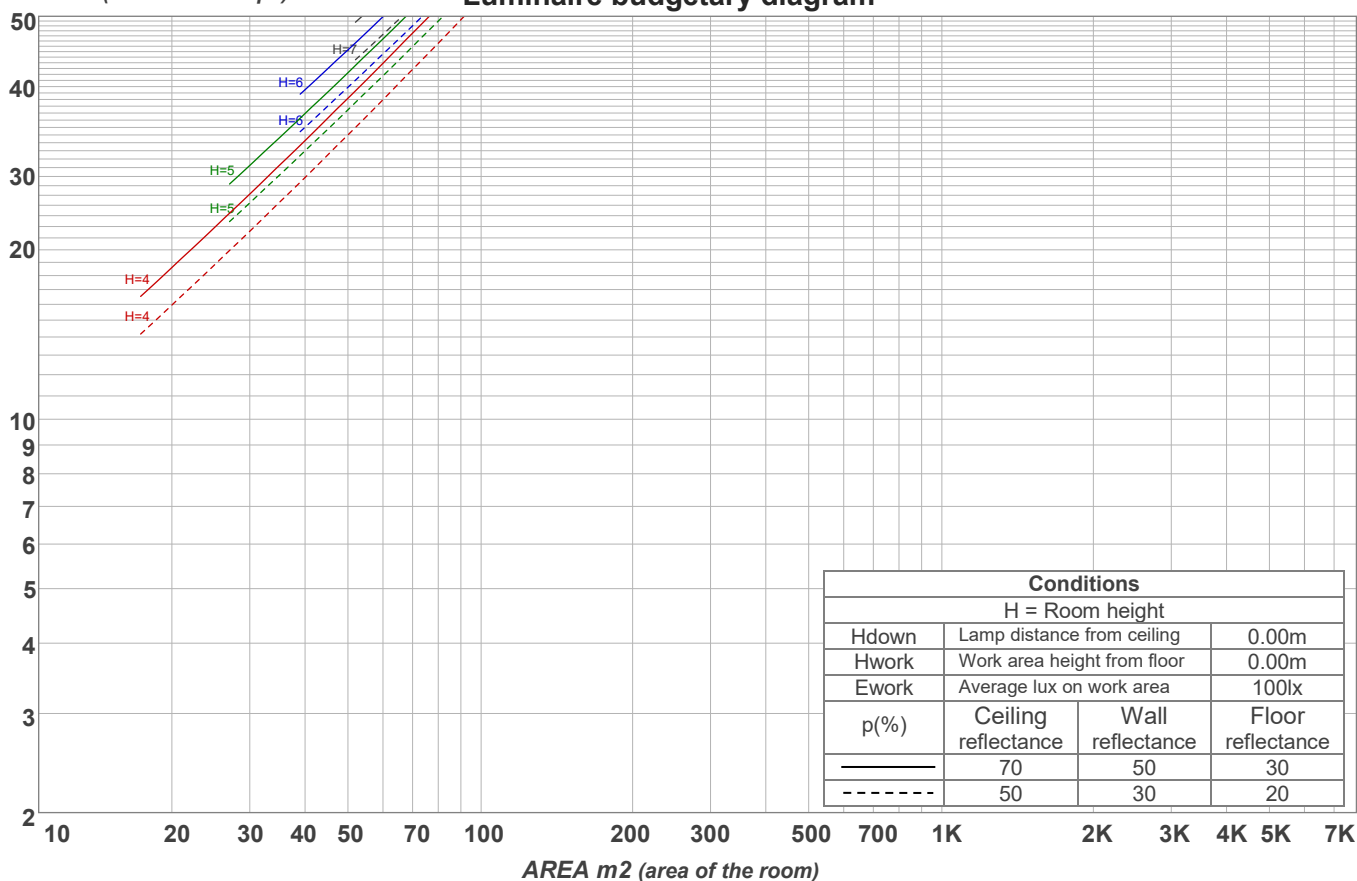

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
30,5 lm	45,0 lm	40,5 lm	34,5 lm	27,9 lm	19,2 lm	12,1 lm	7,26 lm	4,63 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0,717 lm	0,959 lm	0,408 lm	0,369 lm	0,163 lm	0,047 lm	0,034 lm	0,021 lm	1,71 lm

Warmup curve

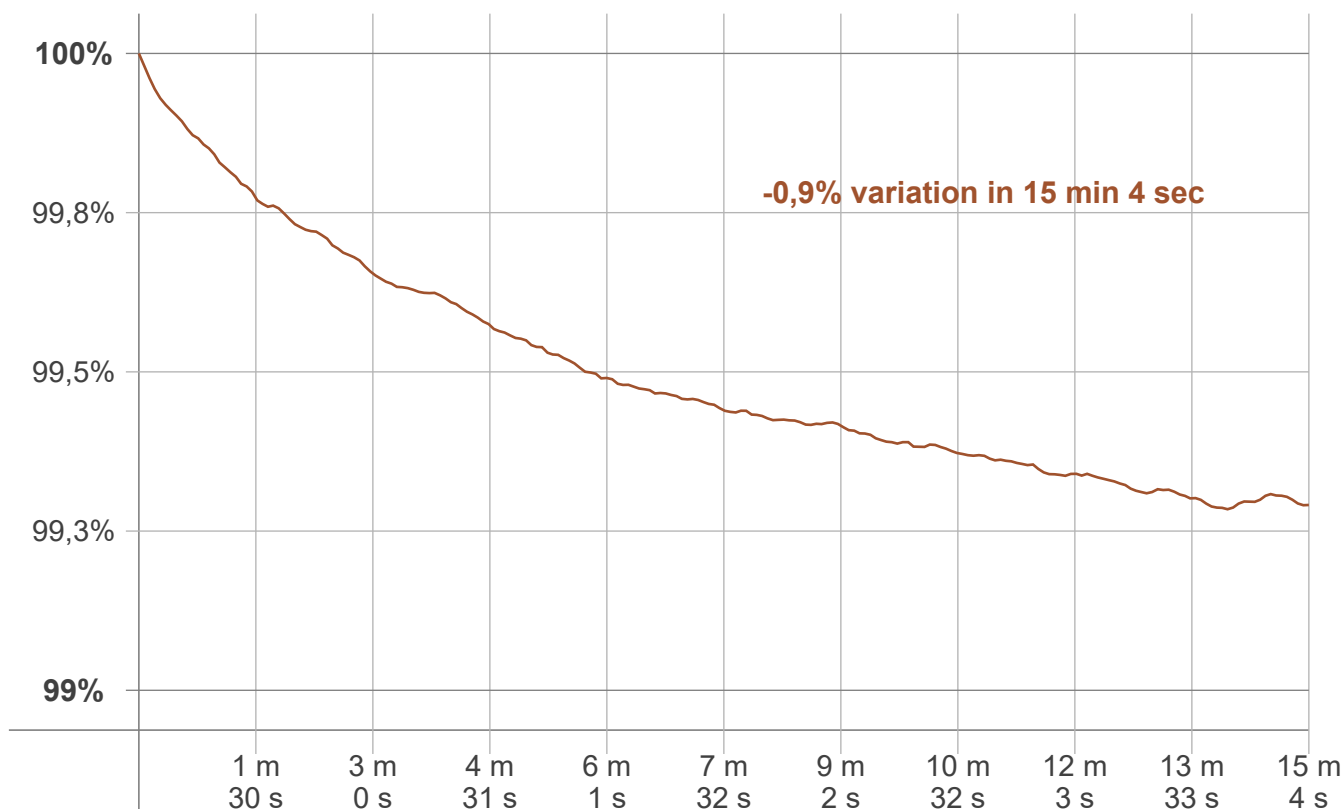

Warmup result

Warmup time:	Lamp stabilized in 15 min 4 sec
Warmup variation	-0,9%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2743 K	+0 K	2743 K

Output change

Output start	Output change	Output end
228 lm	-2 lm	226 lm