

Light efficiency:

107 Lumen/Watt

Light quality:

CRI: 94,1

Color temperature:



2720 K

Output: 1235 lm

Peak: 466 cd

Power: 11,5 W

PF: 1,0

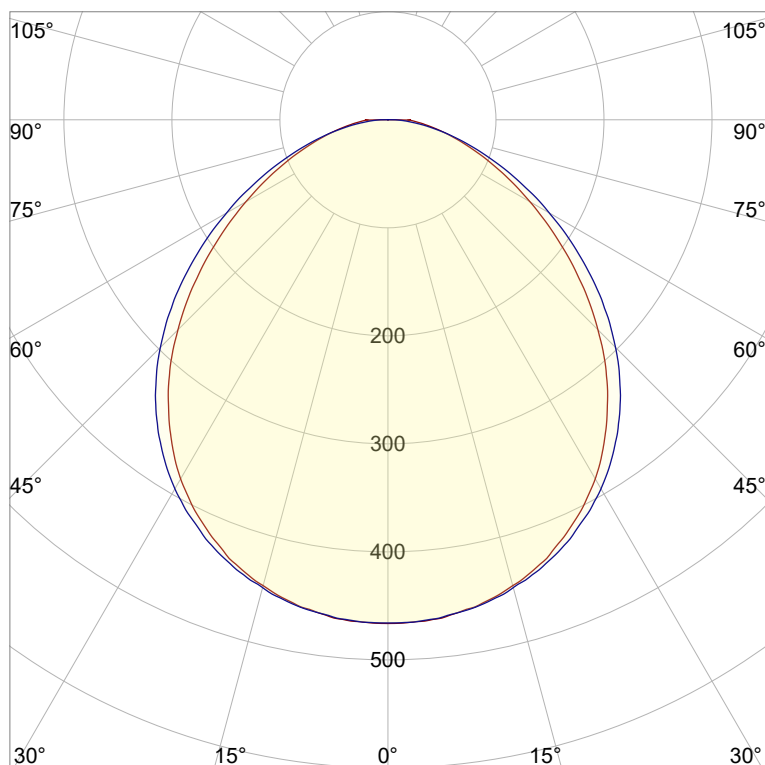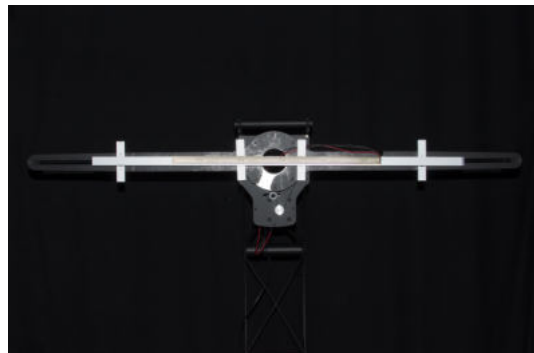

Product name:

Jago-2_510mm_927_Cover-Flat-Frosted

Item number:

NP/L1C/19B/G1/L1C/0510/927/CFF

Date and time:

20.07.2022 15:43:03

Description:

Rank: C80-AD-8GB

Tolerances:

Lumen +/-4%

Candela +/-2,5%

Colour Temp +/-35 Kelvin

CRI +/-0,7

Angular Resolution: 1 Degree Step

Last Calibration 20-09-2021

Tester: Peter Ulrich

Test Site: Lichtlabor

Gaustrasse 13

55411 Bingen am Rhein




CIE 1931

x: 0,457



y: 0,408

Spectra

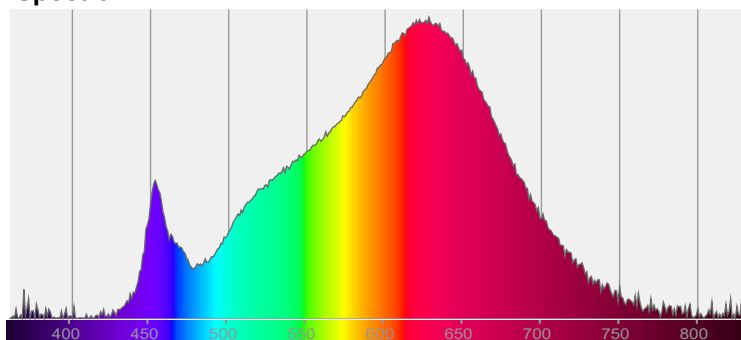


Power


Voltage: 48,0 V
Current: 0,240 A
Frequency: 0 Hz

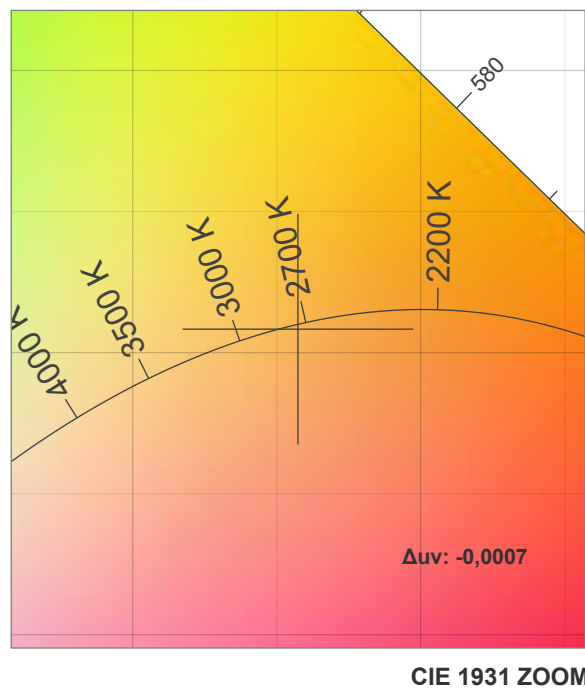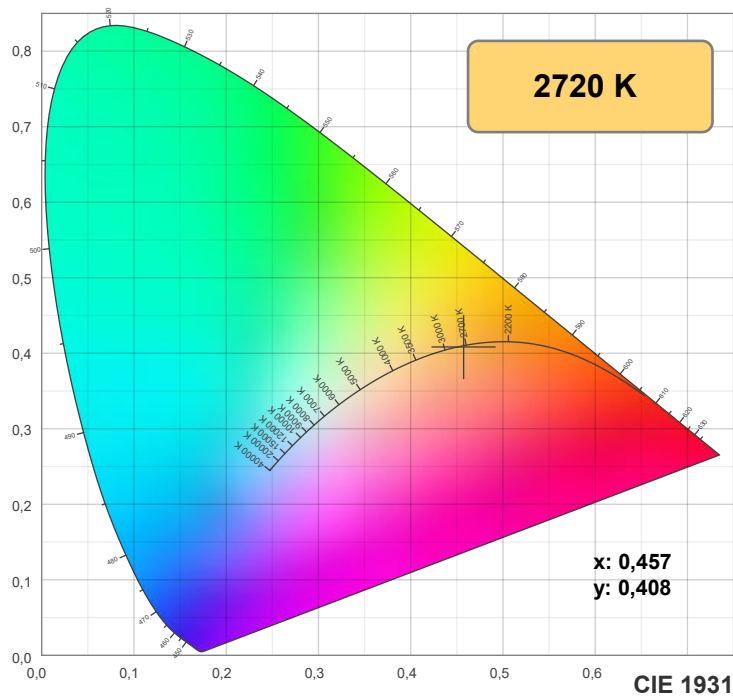

TM30: 91,9

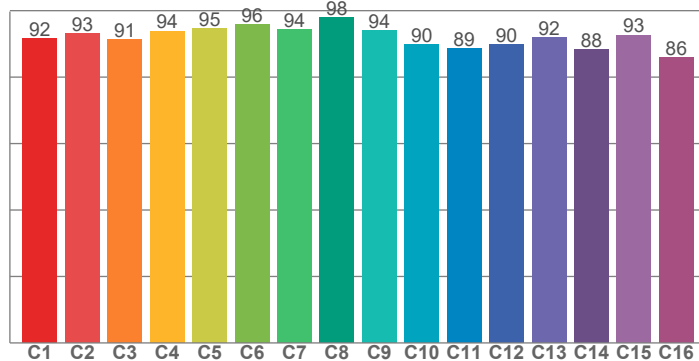

CRI: 94,1 (R1-R8)

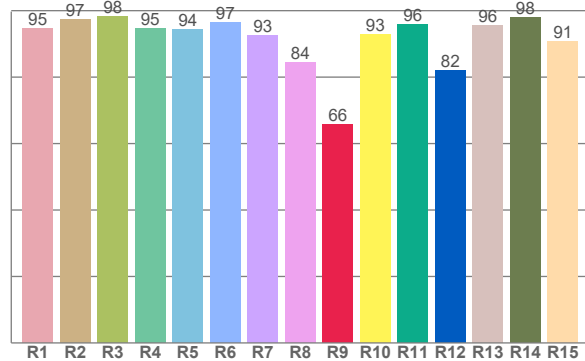

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94,8	97,4	98,2	94,6	94,3	96,6	92,7	84,3	65,7	92,7	95,7	81,9	95,7	98,1	90,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,6	93,2	91,3	93,9	94,7	95,9	94,3	97,9	94,0	89,7	88,6	89,7	91,8	88,2	92,7	85,9

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,3	95,1	88,7	88,3	91,7	92,9	91,0	92,0	97,1	94,0	93,5	93,0	92,8	88,5	88,6

CQS: 91,2

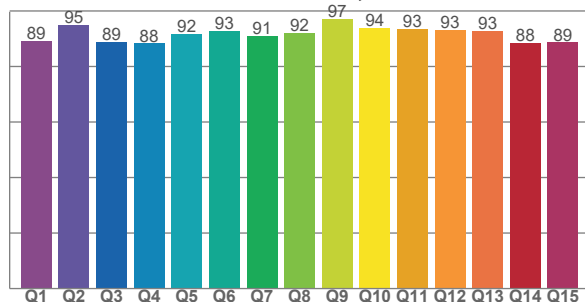

Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2720 K	94,1	65,7	91,9	99,6	91,2	0,457	0,408	0,262	0,351	-0,0007







Rf 91,9


Fidelity index Rf

Rg 99,6

Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	0%
2	93	-3%	2%
3	91	-1%	4%
4	94	-2%	1%
5	95	0%	2%
6	96	2%	1%
7	94	-2%	-1%
8	98	-1%	0%
9	94	-2%	3%
10	90	0%	7%
11	89	2%	8%
12	90	5%	1%
13	92	3%	-5%
14	88	4%	-8%
15	93	-2%	-3%
16	86	-2%	-11%

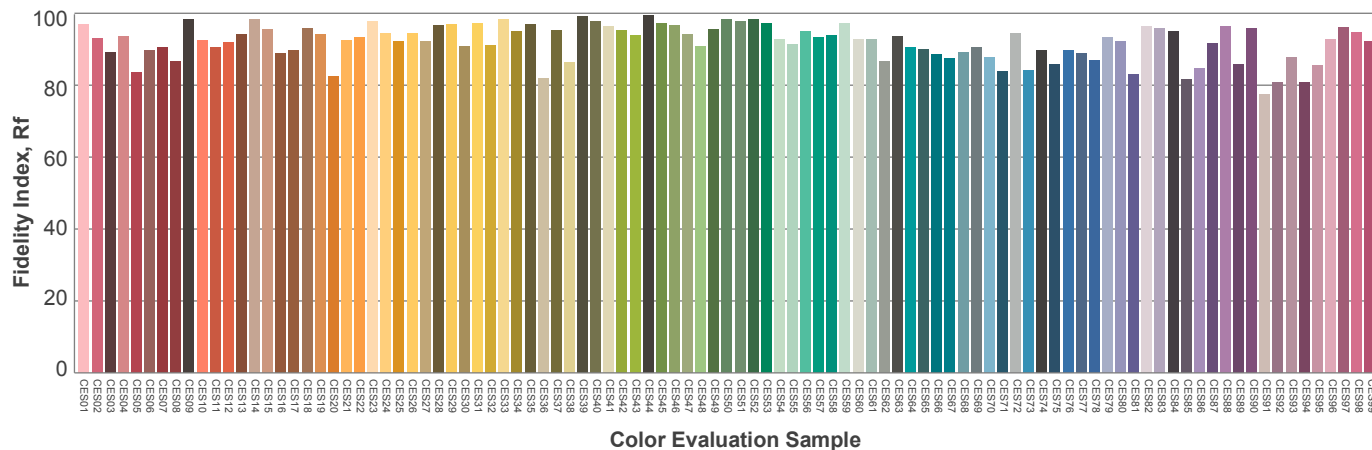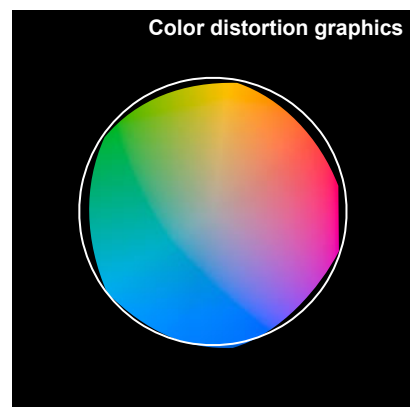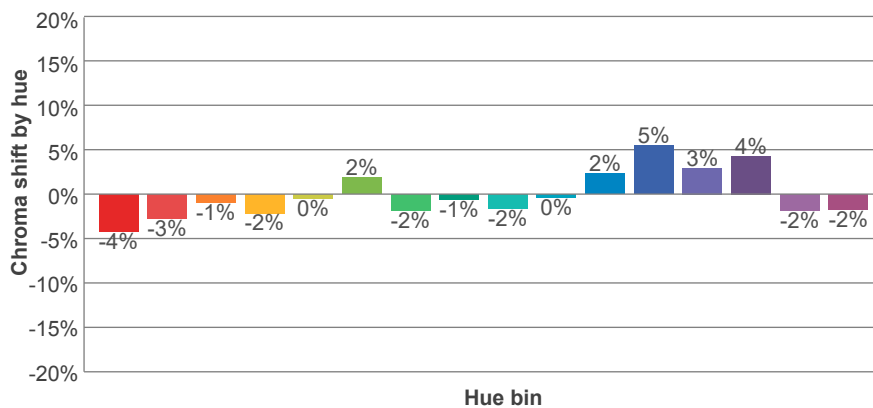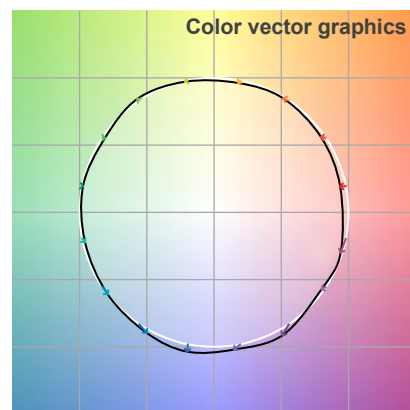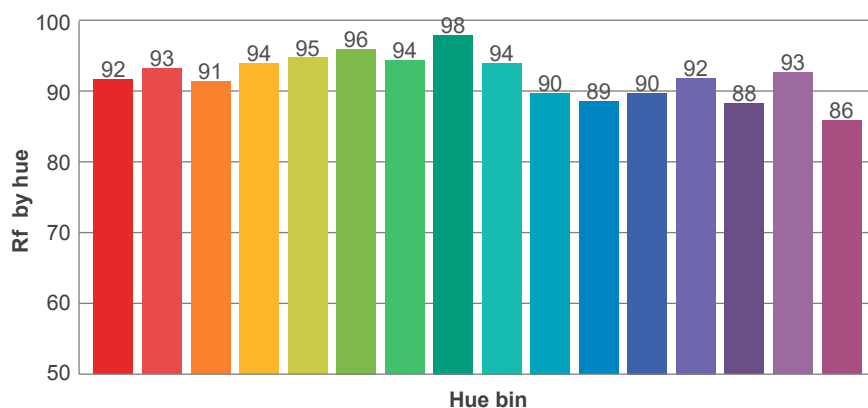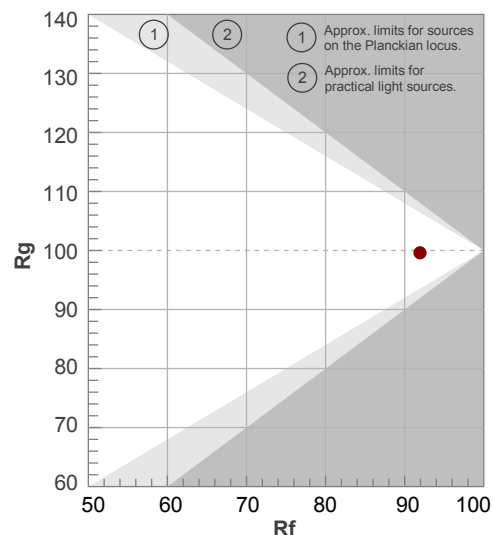

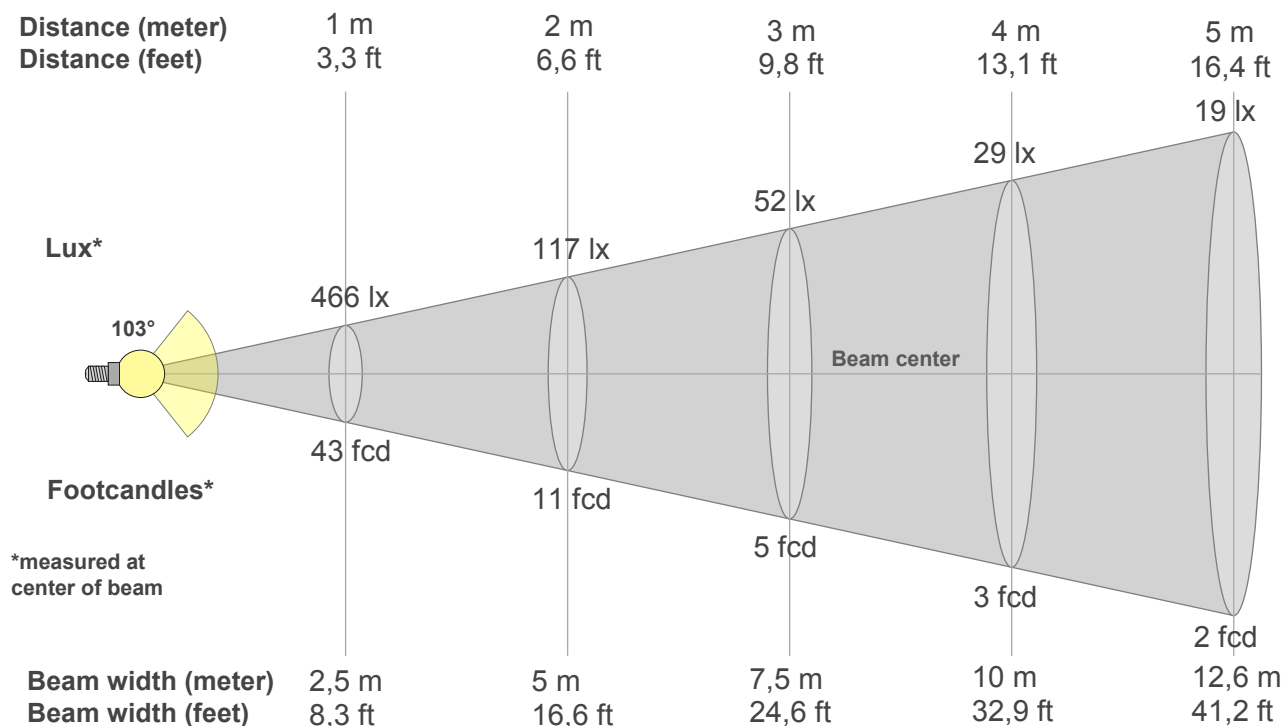

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
466lx	117lx	52lx	29lx	19lx	13lx	10lx	7lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx
43,3fcd	10,8fcd	4,8fcd	2,7fcd	1,7fcd	1,2fcd	0,9fcd	0,7fcd	0,5fcd	0,4fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
466	465	458	446	431	409	384	351	315	275	233	191	152	117	87	63	43	28	9	9
100%	100%	98%	96%	93%	88%	82%	75%	68%	59%	50%	41%	33%	25%	19%	13%	9%	6%	2%	2%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
466	464	459	448	435	416	394	367	335	298	258	215	172	133	96	65	39	19	3	3
100%	100%	98%	96%	93%	89%	85%	79%	72%	64%	55%	46%	37%	28%	21%	14%	8%	4%	1%	1%

Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
466	465	458	446	431	409	384	351	315	275	233	191	152	117	87	63	43	28	9	9
100%	100%	98%	96%	93%	88%	82%	75%	68%	59%	50%	41%	33%	25%	19%	13%	9%	6%	2%	2%

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
466	464	459	448	435	416	394	367	335	298	258	215	172	133	96	65	39	19	3	3
100%	100%	98%	96%	93%	89%	85%	79%	72%	64%	55%	46%	37%	28%	21%	14%	8%	4%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103°	158,3°	179,7°	80,1%	56,6%

ISO candela diagram

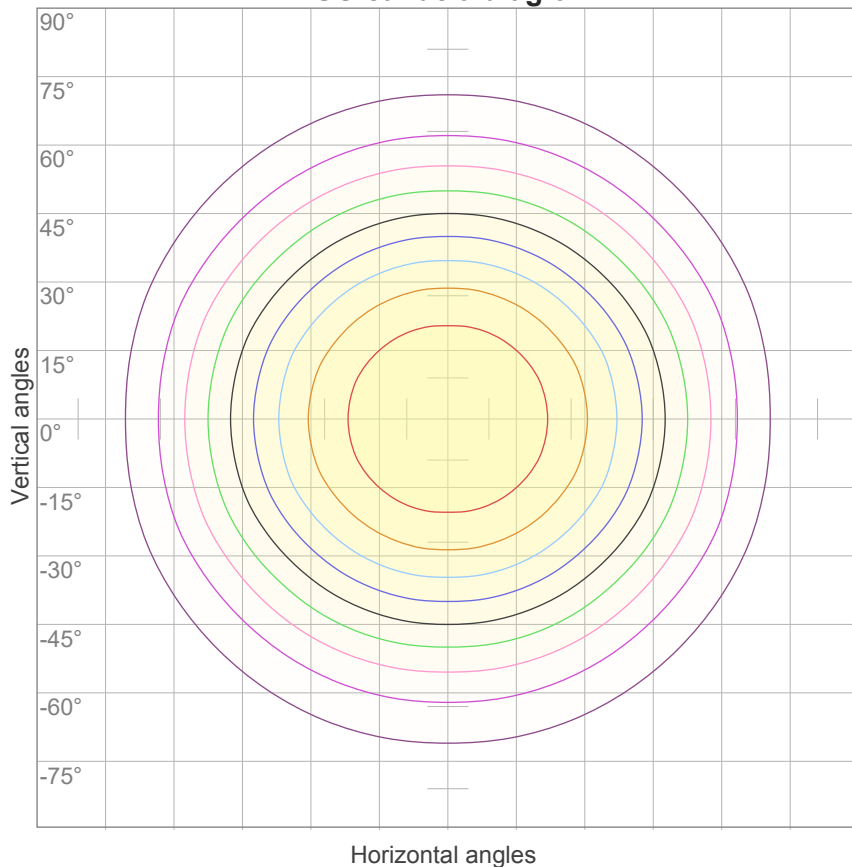


10%	47 cd
20%	93 cd
30%	140 cd
40%	186 cd
50%	233 cd
60%	280 cd
70%	326 cd
80%	373 cd
90%	420 cd

Conditions:

Number of c-planes: 16

Candela at center: 466 cd

ISO lux diagram

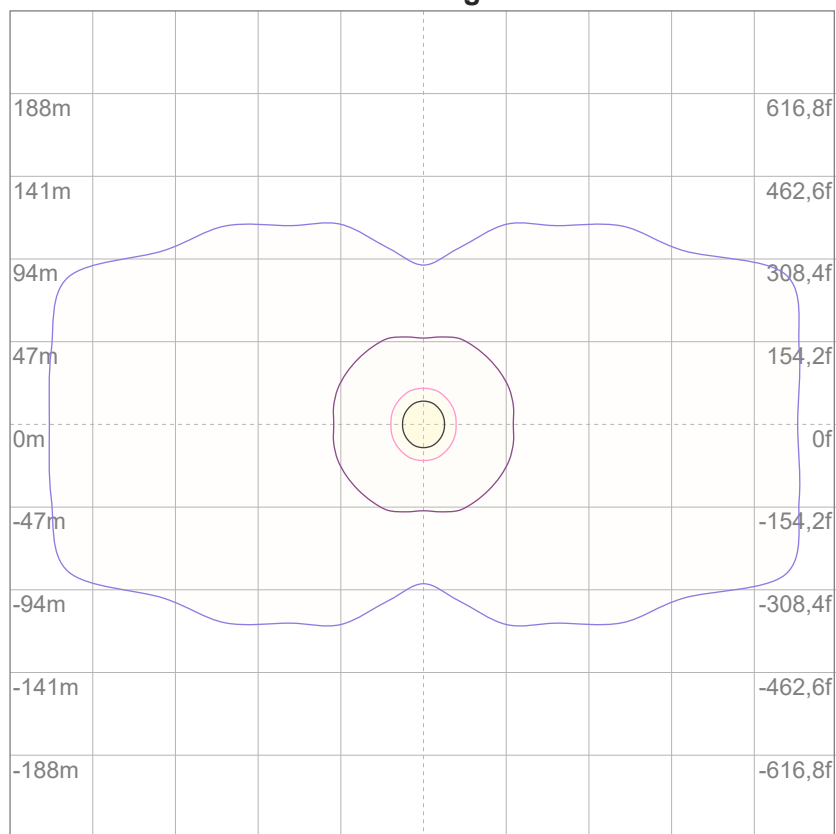

Mounting height: 10 meters (33 feet)

3%	0,140 lx
5%	0,233 lx
10%	0,466 lx
30%	1,40 lx
50%	2,33 lx

Conditions:

Number of c-planes: 16

Lux at center: 4,66 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	23,3	24,5	23,5	24,8	25,0	24,3	25,5	24,5	25,8	26,0
	3H	24,2	25,4	24,6	25,7	25,9	25,5	26,7	25,9	27,0	27,2
	4H	24,6	25,8	25,0	26,0	26,3	25,9	27,1	26,4	27,4	27,6
	6H	25,0	26,0	25,3	26,3	26,7	26,4	27,4	26,7	27,7	28,0
	8H	25,1	26,1	25,4	26,4	26,8	26,5	27,5	26,8	27,8	28,2
	12H	25,2	26,1	25,5	26,5	26,9	26,6	27,5	26,9	27,9	28,3
4H	2H	23,8	25,0	24,2	25,2	25,5	24,6	25,8	25,0	26,1	26,3
	3H	25,0	26,0	25,4	26,3	26,8	26,1	27,1	26,5	27,4	27,8
	4H	25,5	26,3	25,9	26,8	27,3	26,6	27,5	27,1	27,9	28,5
	6H	25,9	26,7	26,4	27,1	27,5	27,1	28,0	27,6	28,3	28,7
	8H	26,0	26,8	26,5	27,2	27,6	27,3	28,1	27,8	28,4	28,8
	12H	26,2	26,8	26,7	27,2	27,7	27,4	28,1	27,9	28,5	29,0
8H	4H	25,7	26,5	26,2	26,9	27,2	26,8	27,5	27,3	27,9	28,3
	6H	26,3	26,9	26,8	27,3	27,9	27,4	28,0	27,9	28,4	29,0
	8H	26,6	27,1	27,1	27,6	28,2	27,7	28,2	28,2	28,7	29,3
	12H	26,8	27,2	27,4	27,7	28,3	27,9	28,3	28,5	28,8	29,4
12H	4H	25,7	26,4	26,2	26,8	27,3	26,8	27,4	27,3	27,8	28,3
	6H	26,4	26,9	26,9	27,4	28,0	27,4	28,0	28,0	28,5	29,1
	8H	26,6	27,1	27,2	27,6	28,2	27,7	28,2	28,3	28,7	29,3
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,1 / -0,1				
S = 1.5H		0,3 / -0,5					0,2 / -0,3				
S = 2.0H		0,7 / -0,9					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 1235 lm total luminous flux											

Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	109	104	100	96	106	101	98	94	97	94	91	93	90	88	89	87	85	83
2	99	91	85	79	96	89	83	78	85	80	76	82	78	74	78	75	72	70
3	91	80	73	66	88	79	71	66	76	69	64	73	67	63	70	65	61	59
4	83	72	63	57	81	70	62	56	67	61	55	65	59	54	63	57	53	51
5	77	64	55	49	75	63	55	49	61	53	48	59	52	47	57	51	47	44
6	71	58	49	43	69	57	49	43	55	48	42	53	47	42	51	46	41	39
7	66	53	44	38	64	52	44	38	50	43	37	48	42	37	47	41	37	35
8	61	48	40	34	60	47	39	34	46	39	34	45	38	33	43	37	33	31
9	57	44	36	31	56	44	36	31	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	52	40	33	28	39	32	28	38	32	27	37	31	27	25

LAMPS (number of lamps)


Luminaire budgetary diagram

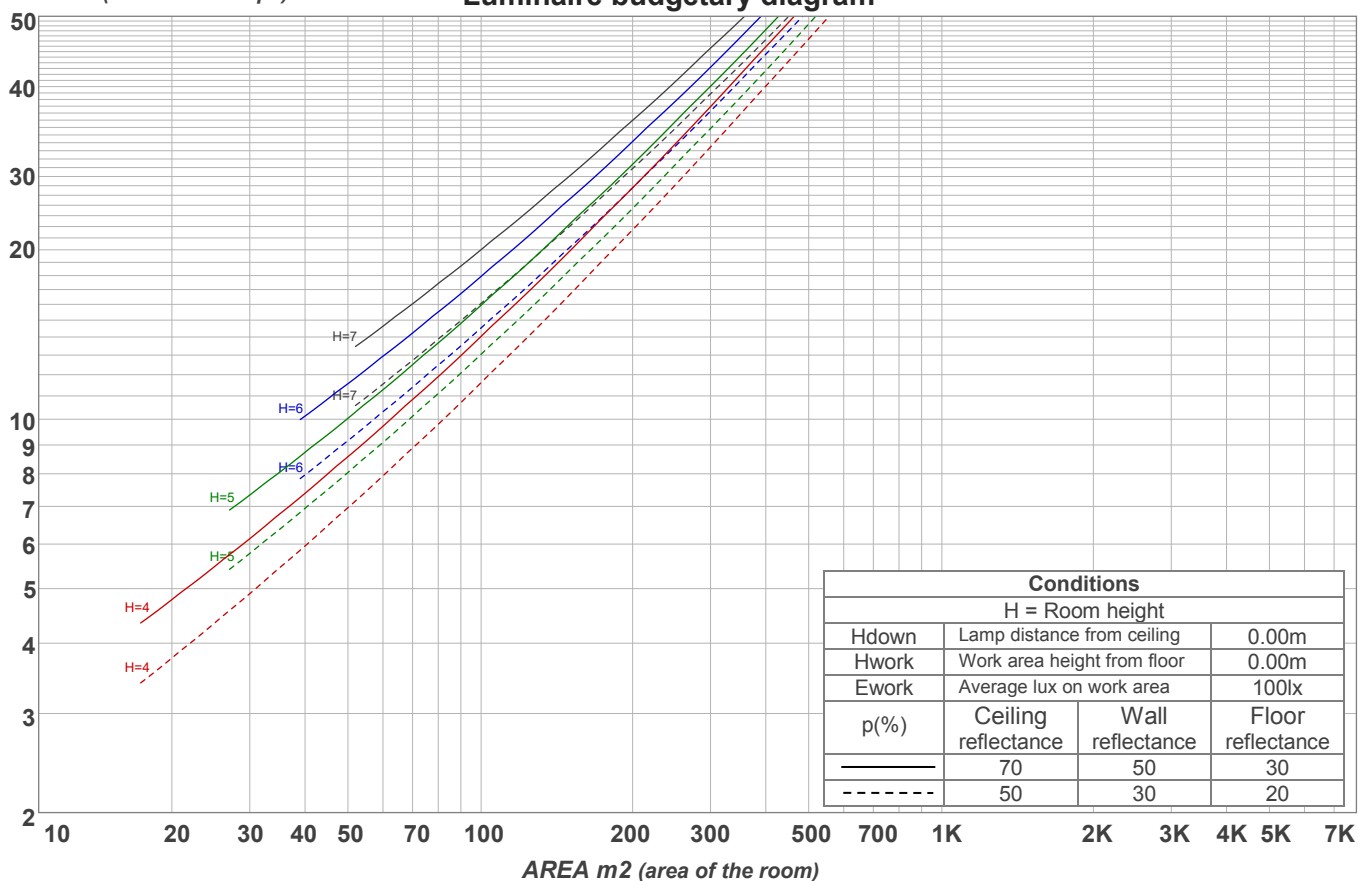

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
44,1 lm	126 lm	190 lm	225 lm	221 lm	182 lm	125 lm	70,0 lm	28,5 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
8,76 lm	3,70 lm	3,15 lm	2,84 lm	1,74 lm	0,976 lm	0,719 lm	0,441 lm	0,148 lm

Warmup curve

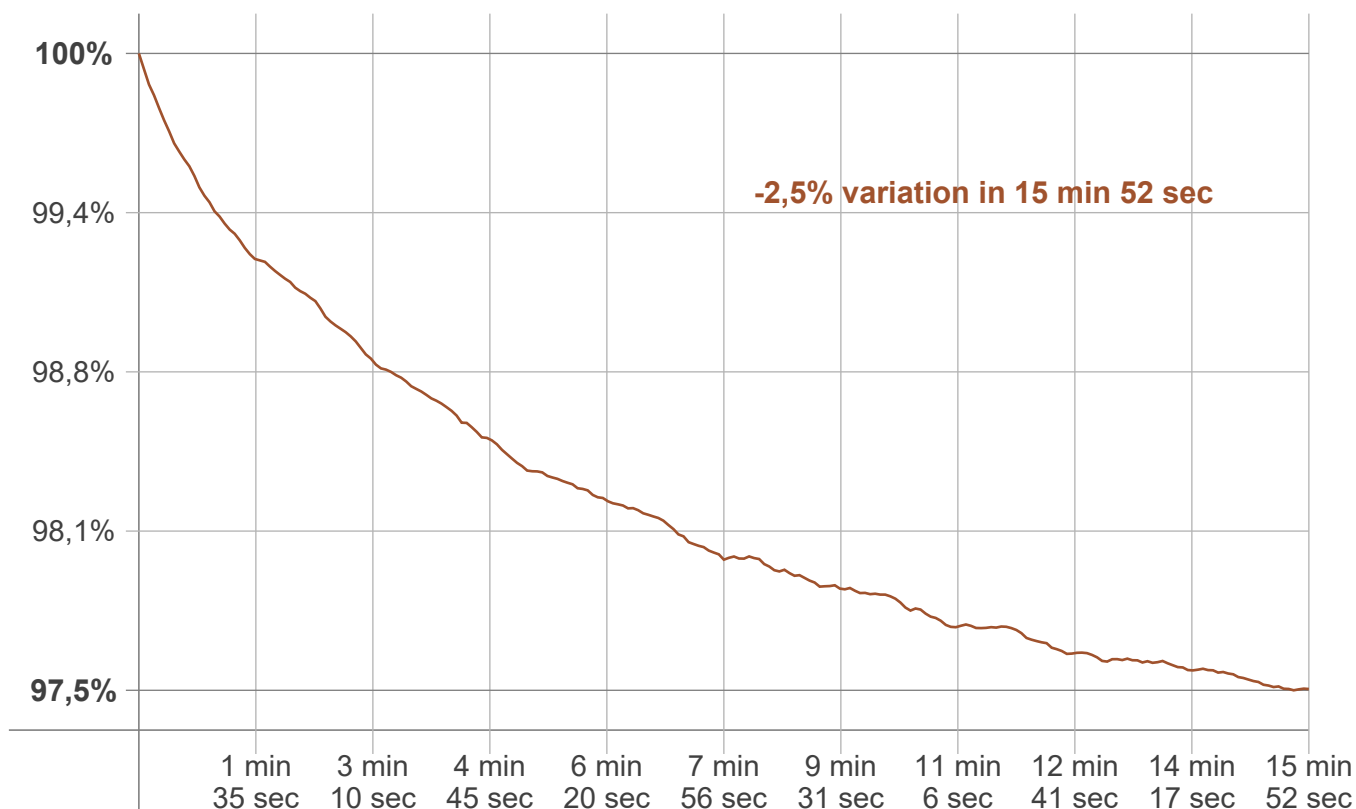

Warmup result

Warmup time:	Lamp stabilized in 15 min 52 sec
Warmup variation	-2,5%

Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

Color temperature change

CCT start	CCT change	CCT end
2724 K	-4 K	2720 K

Output change

Output start	Output change	Output end
1263 lm	-28 lm	1235 lm