

#### Light efficiency:

79 Lumen/Watt

#### Light quality:

CRI: 92,1

#### Color temperature:

3020 K

Output: 800 lm

Peak: 302 cd

Power: 10,1 W

PF: 1,0



#### Product name:

**Pegasus-3-Gold-0508-930-CFF**

#### Item number:

**FLNP/L/16A0508/930/CFF**

#### Date and time:

**05.05.2021 10:24:15**

#### Description:

**Rank: M27ZT**

**Toleranzen:**

**Lumen +/-4%**

**Candela +/-2,5%**

**Colour Temp +/-35 K**

**CRI +/- 0,7**

**Angular Resolution 1 Grad step**


**Last Calibration 20-05-2020**

**Pruefer: Peter Ulrich**

**Pruefort: Lichtlabor**

**Gaustrasse13**

**55411 Bingen am Rhein**

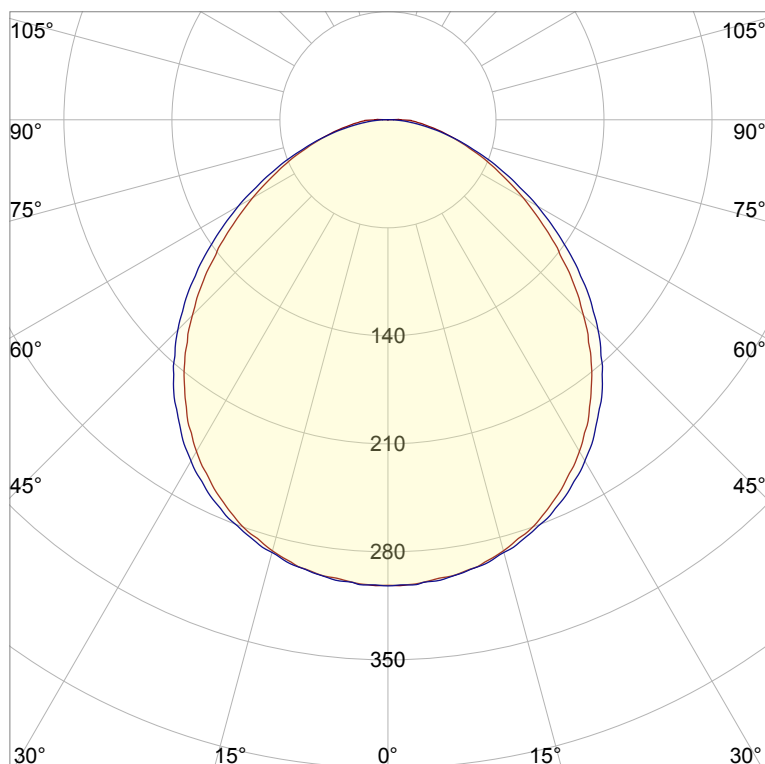


CIE 1931


x: 0,434



y: 0,400

#### Spectra

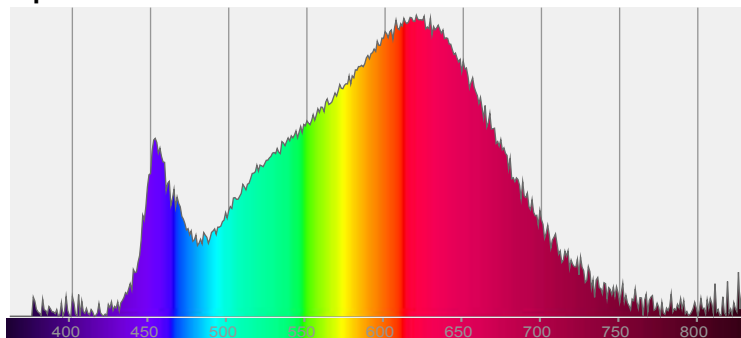


#### Power

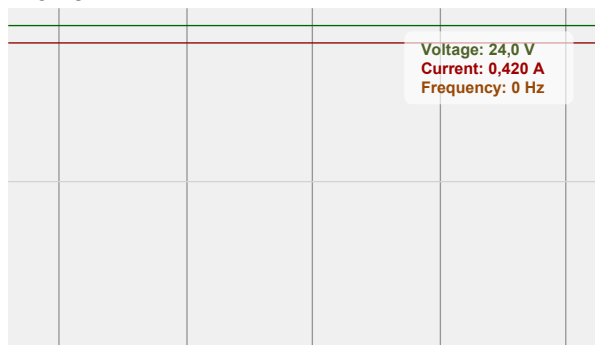


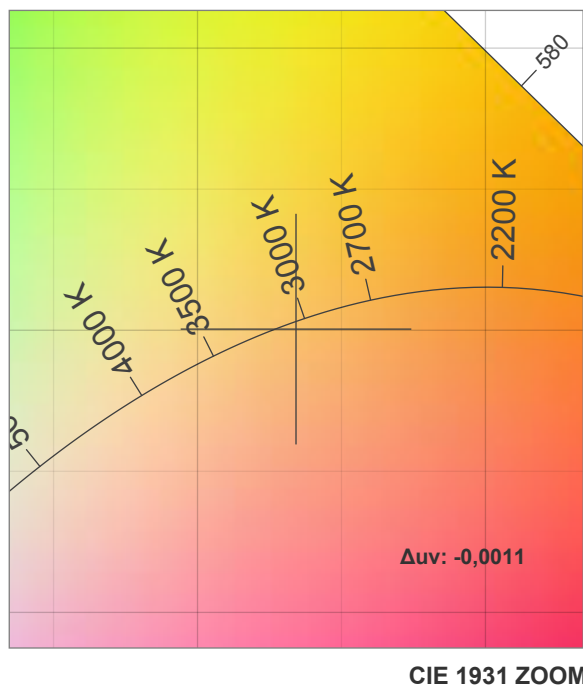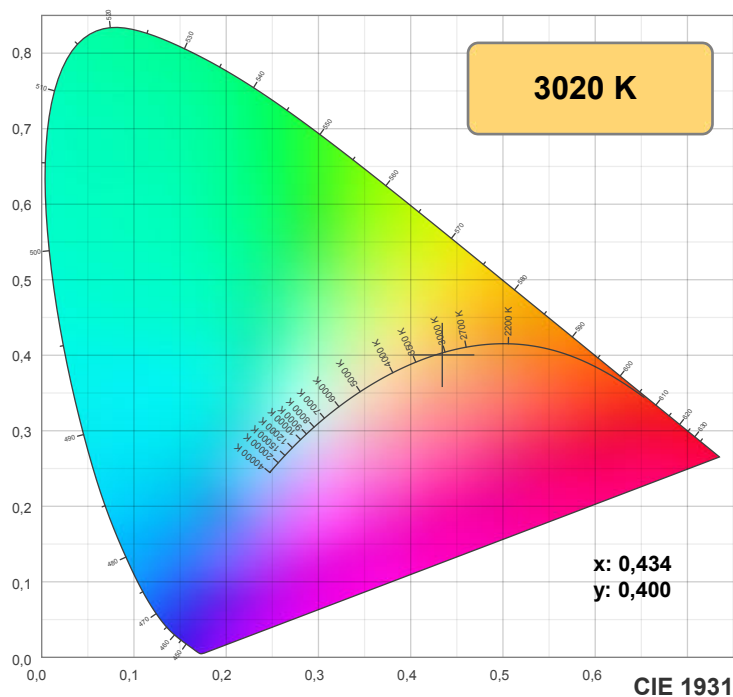

**TM30: 90,2**

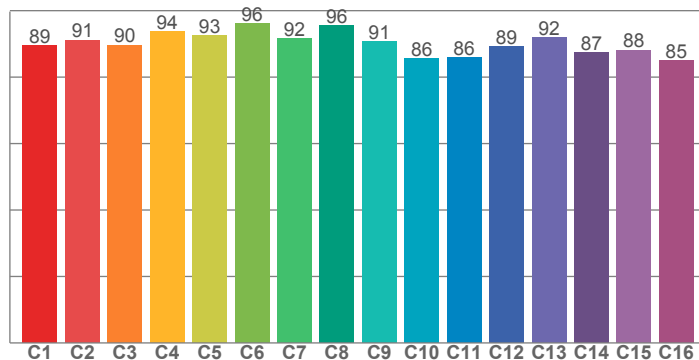

**CRI: 92,1 (R1-R8)**

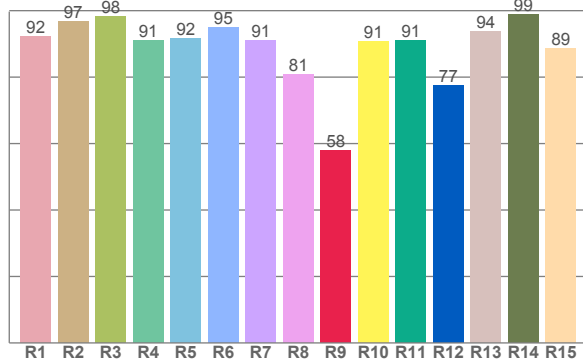

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,4	96,6	98,2	91,0	91,7	95,0	91,1	80,9	58,0	90,7	91,1	77,5	93,7	98,8	88,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89,4	91,1	89,7	93,7	92,6	96,2	91,6	95,5	90,8	85,6	85,8	89,3	91,9	87,3	88,2	85,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
88,3	95,8	87,1	84,9	88,4	90,5	90,7	91,5	97,4	93,5	91,8	91,0	91,0	86,5	87,1

**CQS: 89,7**

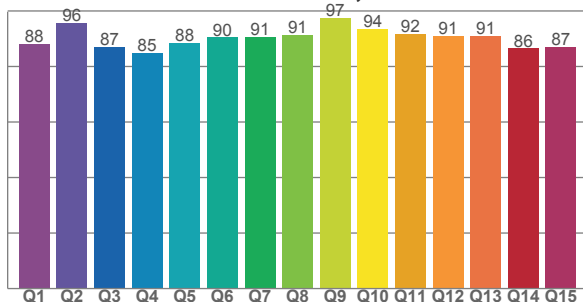

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3020 K	92,1	58,0	90,2	98,2	89,7	0,434	0,400	0,250	0,346	-0,0011







## Rf 90,2


Fidelity index Rf

## Rg 98,2

Gamut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	89	-5%	1%
2	91	-4%	3%
3	90	-1%	5%
4	94	-2%	2%
5	93	-3%	2%
6	96	0%	-1%
7	92	-4%	0%
8	96	-2%	1%
9	91	-3%	5%
10	86	-1%	9%
11	86	3%	10%
12	89	6%	2%
13	92	3%	-5%
14	87	4%	-9%
15	88	-2%	-6%
16	85	-2%	-11%

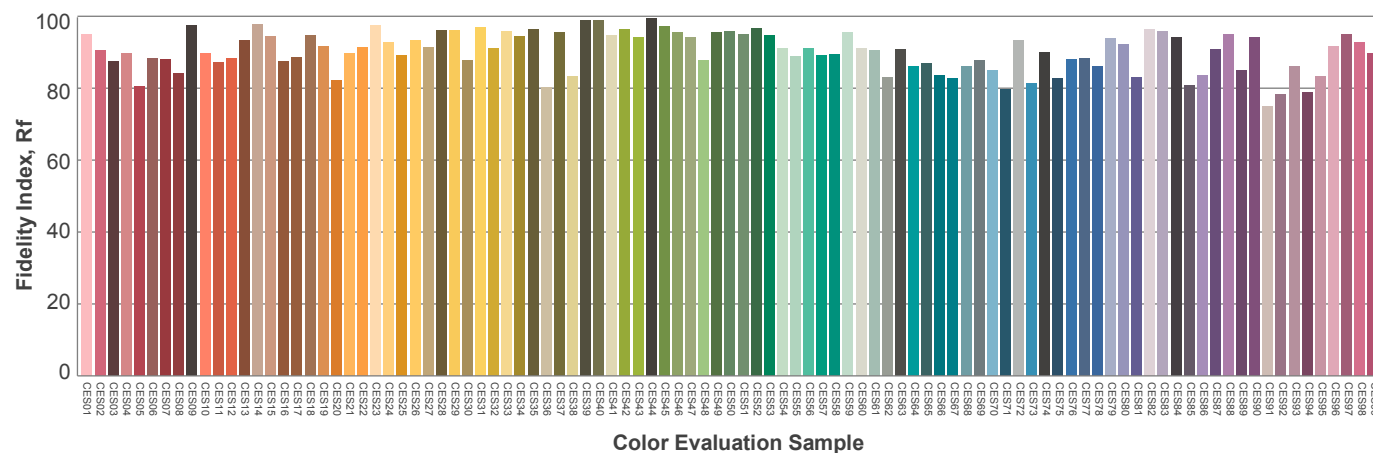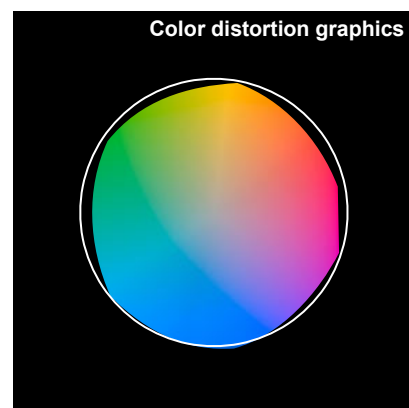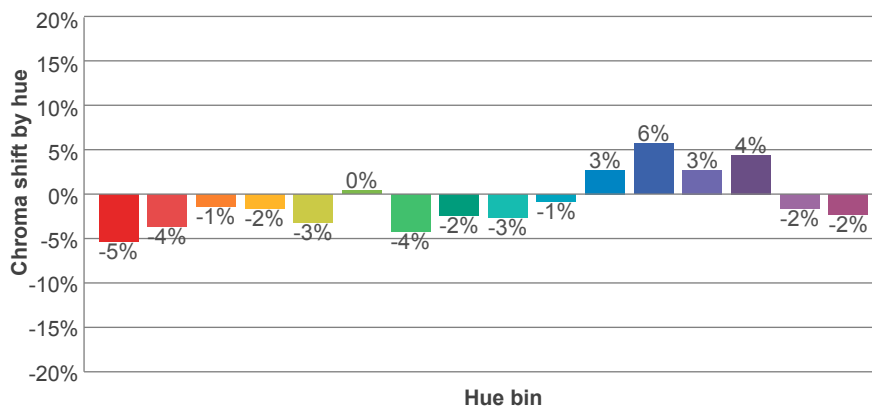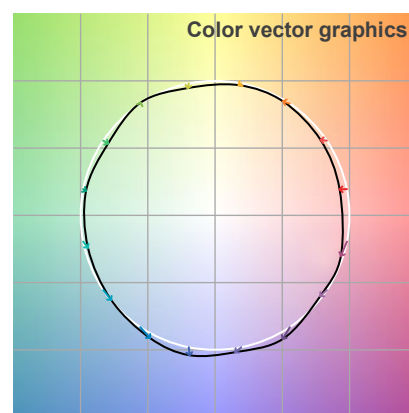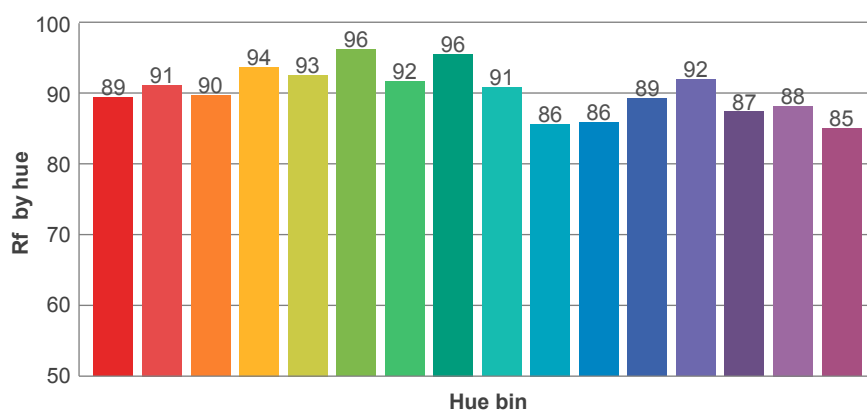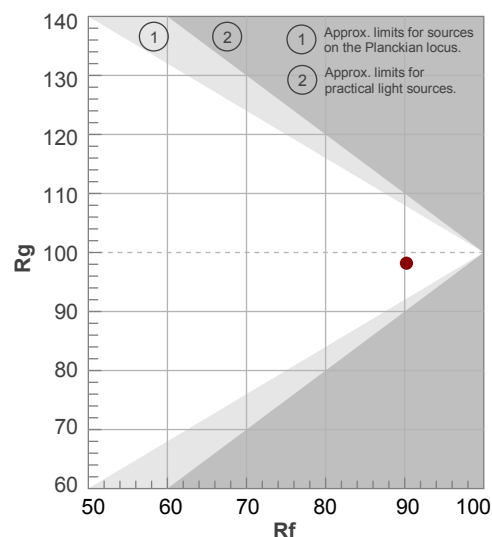

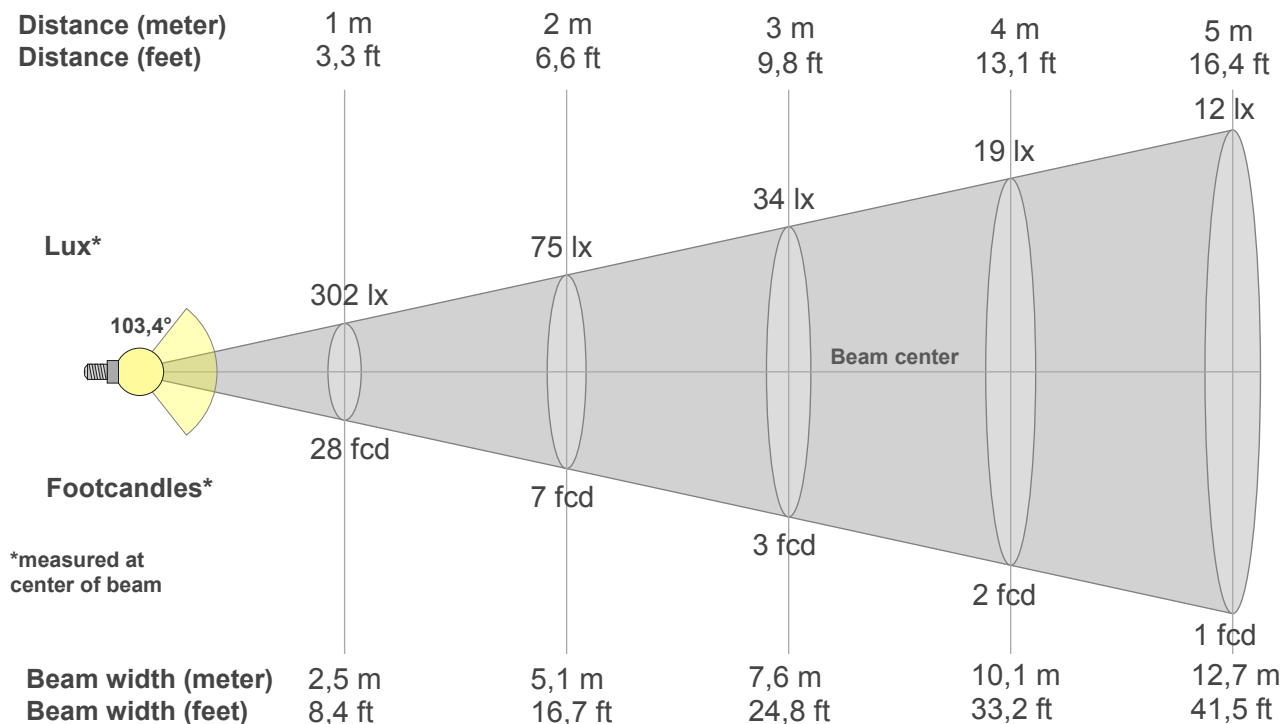

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
302lx	75lx	34lx	19lx	12lx	8lx	6lx	5lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
28fcd	7fcd	3,1fcd	1,8fcd	1,1fcd	0,8fcd	0,6fcd	0,4fcd	0,3fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd

## Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	279	265	248	228	205	179	153	126	101	78	59	42	29	19	7	0
100%	99%	98%	96%	92%	88%	82%	75%	68%	59%	51%	42%	34%	26%	19%	14%	10%	6%	2%	0%

## Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	301	297	290	281	270	255	237	216	192	167	139	112	86	62	42	25	11	2	2
100%	100%	98%	96%	93%	90%	85%	78%	72%	64%	55%	46%	37%	28%	21%	14%	8%	4%	1%	1%

## Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	300	296	289	279	265	248	228	205	179	153	126	101	78	59	42	29	19	7	0
100%	99%	98%	96%	92%	88%	82%	75%	68%	59%	51%	42%	34%	26%	19%	14%	10%	6%	2%	0%

## Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
302	301	297	290	281	270	255	237	216	192	167	139	112	86	62	42	25	11	2	2
100%	100%	98%	96%	93%	90%	85%	78%	72%	64%	55%	46%	37%	28%	21%	14%	8%	4%	1%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103,4°	158,5°	177,8°	80,2%	56,5%

### ISO candela diagram

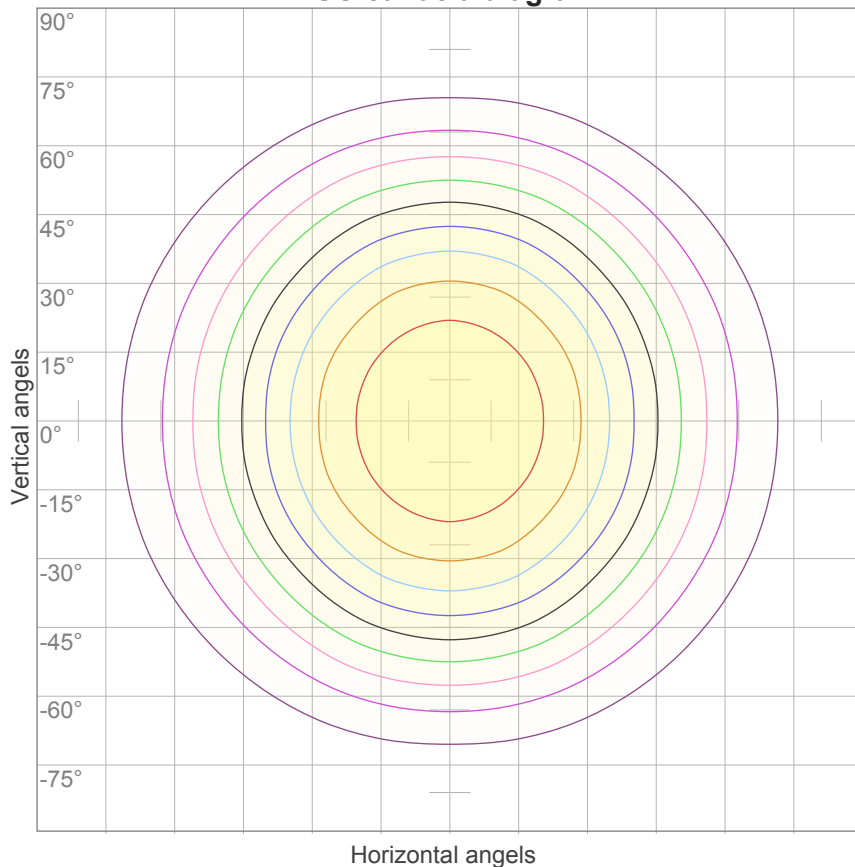


10%	30 cd
20%	60 cd
30%	91 cd
40%	121 cd
50%	151 cd
60%	181 cd
70%	211 cd
80%	241 cd
90%	272 cd

#### Conditions:

Number of c-planes: 16

Candela at center: 302 cd

### ISO lux diagram

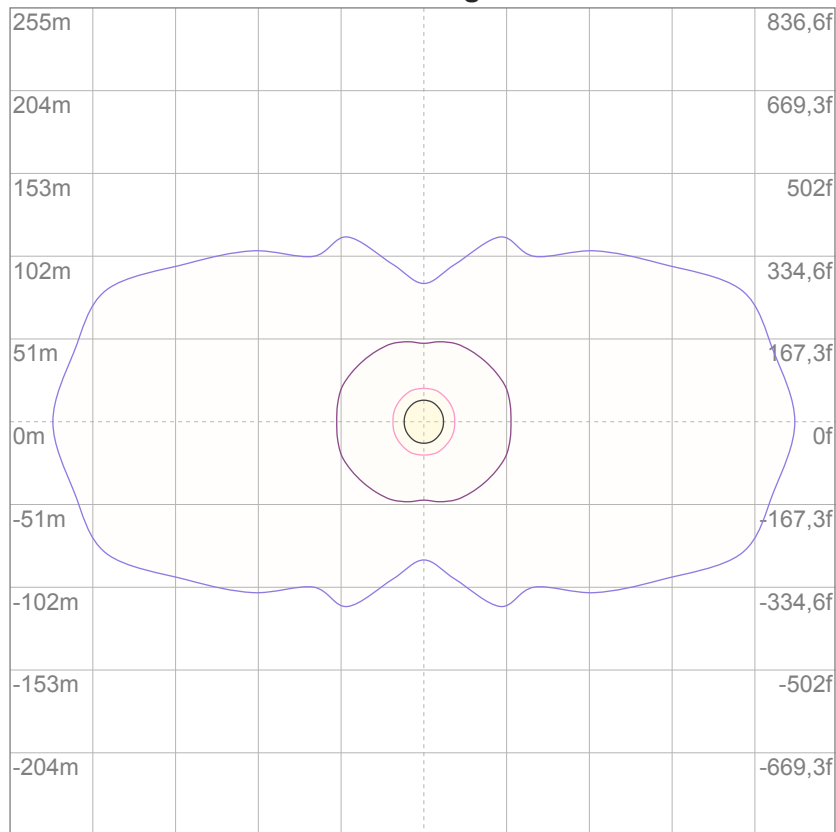

3%	90,6m lx
5%	0,151 lx
10%	0,302 lx
30%	0,906 lx
50%	1,51 lx

#### Conditions:

Number of c-planes: 16

Lux at center: 3,02 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

### Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,8	23,0	22,0	23,3	23,5	22,8	23,9	23,0	24,3	24,5
	3H	22,8	24,0	23,2	24,3	24,5	23,9	25,1	24,3	25,4	25,6
	4H	23,2	24,4	23,6	24,6	24,9	24,4	25,6	24,8	25,8	26,1
	6H	23,6	24,6	23,9	24,9	25,3	24,8	25,8	25,1	26,1	26,5
	8H	23,7	24,7	24,0	25,0	25,4	24,9	25,9	25,2	26,2	26,6
	12H	23,8	24,7	24,1	25,1	25,5	25,0	25,9	25,3	26,3	26,7
4H	2H	22,3	23,5	22,7	23,8	24,0	23,1	24,3	23,5	24,5	24,8
	3H	23,6	24,6	24,0	24,9	25,4	24,6	25,5	24,9	25,9	26,3
	4H	24,1	25,0	24,5	25,4	25,9	25,1	26,0	25,5	26,4	26,9
	6H	24,5	25,4	25,0	25,7	26,1	25,5	26,4	26,0	26,8	27,1
	8H	24,7	25,4	25,2	25,8	26,2	25,7	26,5	26,2	26,9	27,2
	12H	24,8	25,4	25,3	25,9	26,3	25,8	26,5	26,3	26,9	27,4
8H	4H	24,3	25,1	24,8	25,5	25,9	25,2	26,0	25,7	26,4	26,8
	6H	24,9	25,5	25,4	26,0	26,5	25,8	26,4	26,3	26,9	27,4
	8H	25,2	25,7	25,7	26,2	26,8	26,1	26,6	26,6	27,1	27,8
	12H	25,4	25,8	26,0	26,3	26,9	26,3	26,7	26,9	27,2	27,8
12H	4H	24,3	25,0	24,8	25,4	25,9	25,2	25,9	25,7	26,3	26,8
	6H	25,0	25,5	25,5	26,0	26,7	25,9	26,4	26,4	26,9	27,6
	8H	25,3	25,7	25,8	26,2	26,8	26,2	26,6	26,7	27,1	27,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,1 / -0,2					0,1 / -0,1				
S = 1.5H		0,3 / -0,5					0,2 / -0,3				
S = 2.0H		0,7 / -0,9					0,7 / -0,8				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 800 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	109	104	100	96	106	102	98	94	97	94	91	93	90	88	89	87	85	83
2	99	91	85	79	96	89	83	78	85	80	76	82	78	74	79	75	72	70
3	91	80	72	66	88	79	71	65	76	69	64	73	67	63	70	65	62	59
4	83	72	63	56	81	70	62	56	67	61	55	65	59	54	63	58	53	51
5	77	64	55	49	75	63	55	49	61	53	48	59	52	47	57	51	47	44
6	71	58	49	43	69	57	49	43	55	48	42	53	47	42	51	46	41	39
7	66	53	44	38	64	52	44	38	50	43	37	48	42	37	47	41	37	35
8	61	48	40	34	60	47	39	34	46	39	34	45	38	33	43	37	33	31
9	57	44	36	31	56	44	36	31	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	52	40	33	28	39	32	28	38	32	27	37	31	27	25

LAMPS (number of lamps)


## Luminaire budgetary diagram

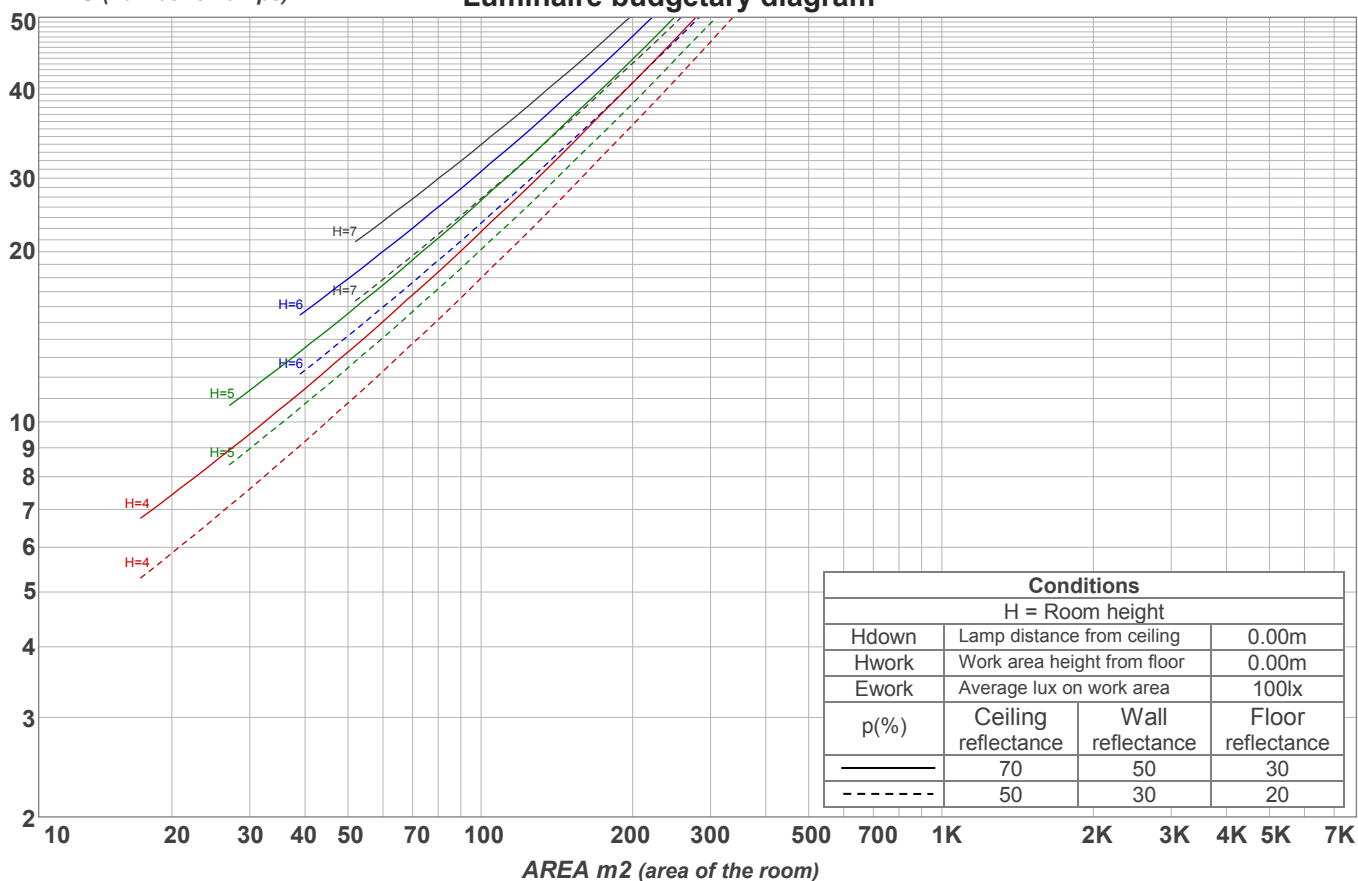

## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
28,6 lm	81,8 lm	123 lm	145 lm	144 lm	119 lm	82,5 lm	46,1 lm	18,3 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
4,28 lm	1,81 lm	1,49 lm	1,35 lm	1,07 lm	0,813 lm	0,599 lm	0,367 lm	0,124 lm

## Warmup curve

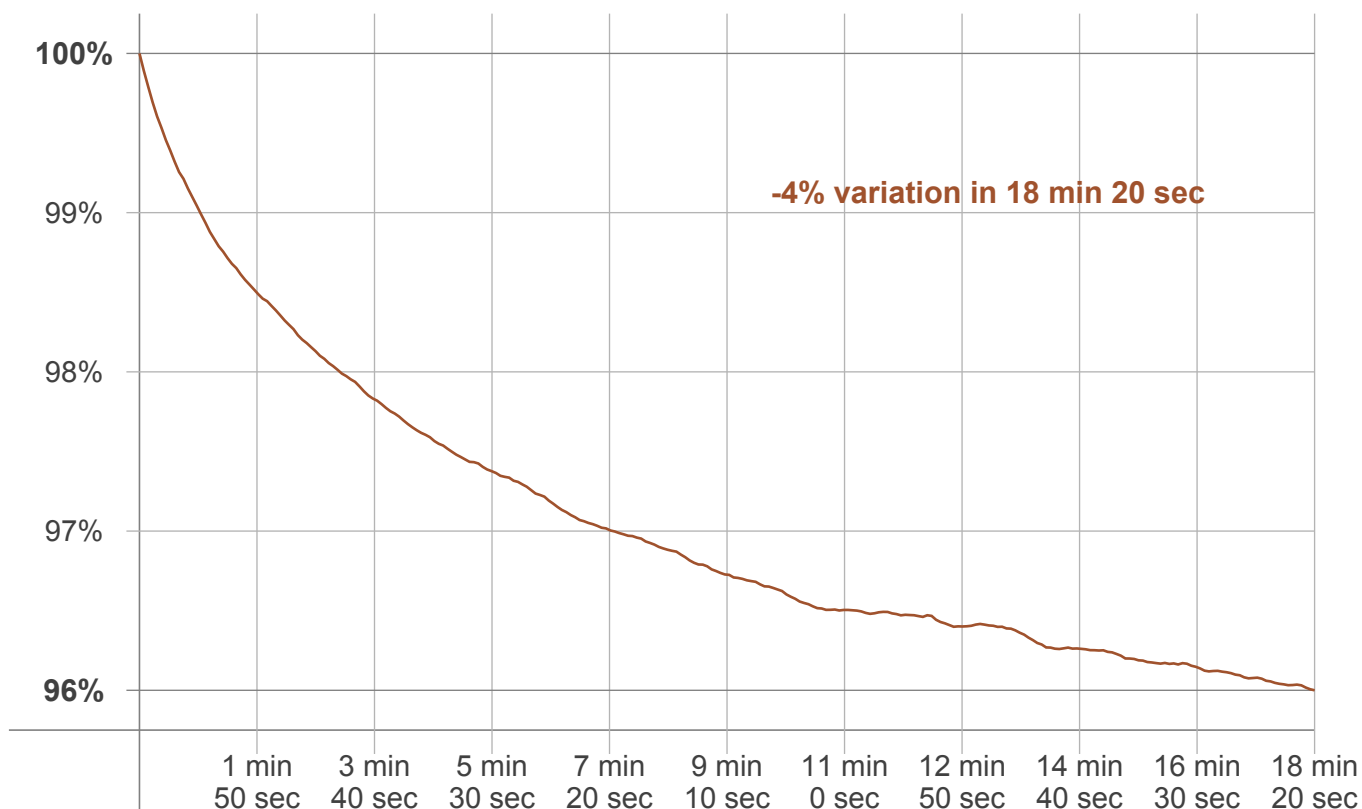

## Warmup result

Warmup time:	18 min 20 sec
Warmup variation	-4,0%

## Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

## Color temperature change

CCT start	CCT change	CCT end
3028 K	-8 K	3020 K

## Output change

Output start	Output change	Output end
831 lm	-30 lm	800 lm