

### Light efficiency:

**131 Lumen/Watt**

### Light quality:

**CRI: 94,7**

### Color temperature:


**2743 K**

**Output: 566 lm**

**Peak: 199 cd**

**Power: 4,3 W**

**PF: 1,0**

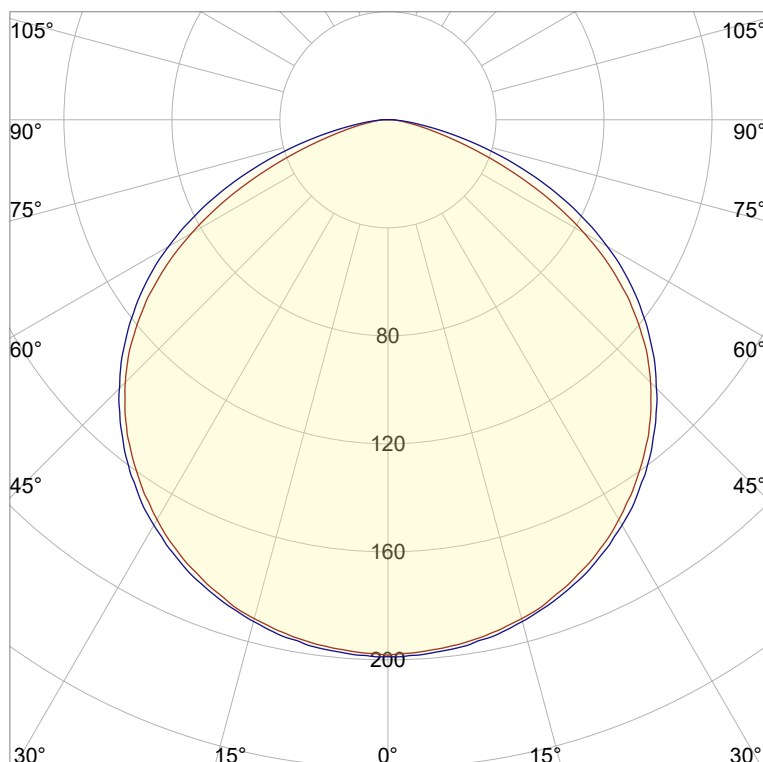

### Product name:

**Victory-7\_510mm\_927\_Cover-Flat-Transparent**

### Item number:

**NP/L1C/03F/G1/L1C/0510/927/CFT**

### Date and time:

**02.06.2022 11:21:29**

### Description:

**Rank: C80-AD-8GB**

**Tolerances:**

**Lumen +/-4%**

**Candela +/-2,5%**

**Colour Temp +/-35 Kelvin**

**CRI +/-0,7**

**Angular Resolution: 1 Degree Step**

**Last Calibration 20-09-2021**

**Tester: Peter Ulrich**

**Test Site: Lichtlabor**

**Gaustrasse 13**

**55411 Bingen am Rhein**




**CIE 1931**

**x: 0,456**



**y: 0,409**

### Spectra

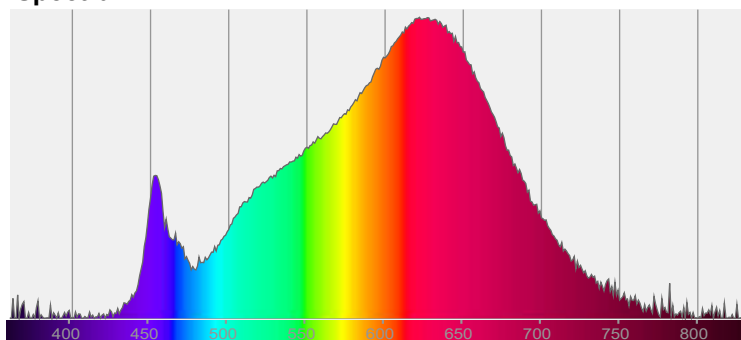



### Power

**Voltage: 48,0 V**  
**Current: 0,090 A**  
**Frequency: 0 Hz**

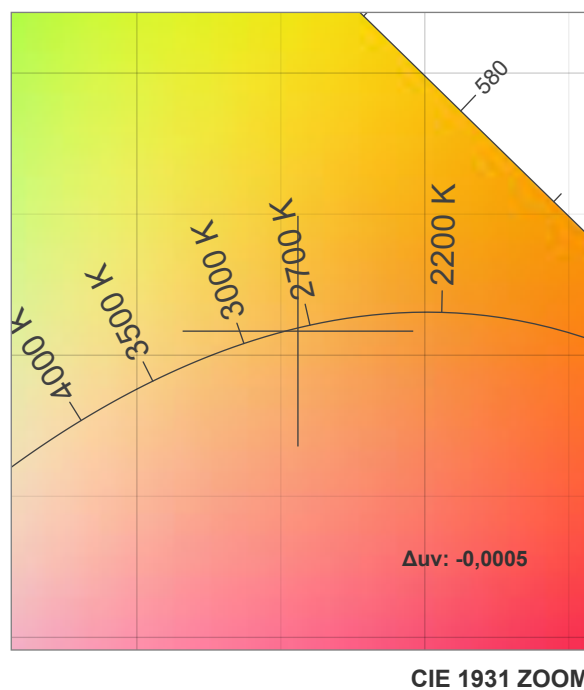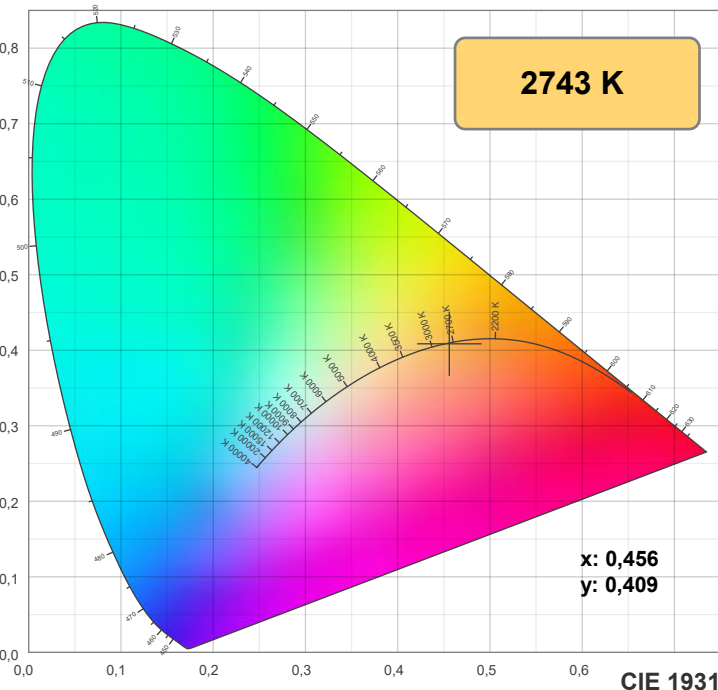

**TM30: 92,3**

**CRI: 94,7 (R1-R8)**

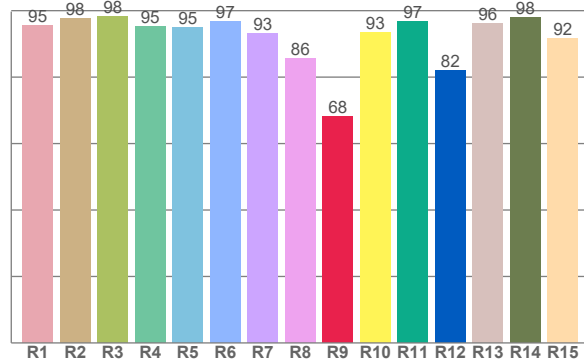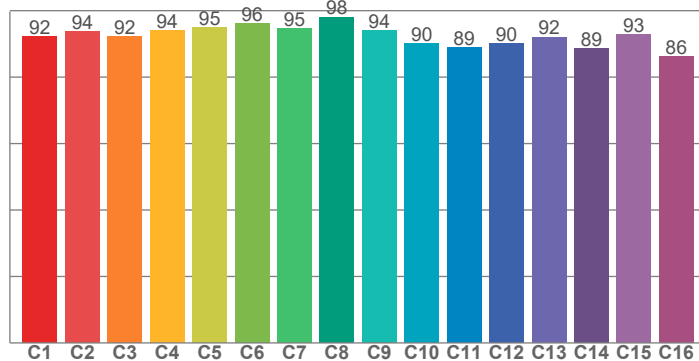

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,5	97,7	98,2	95,4	95,0	96,9	93,2	85,5	68,2	93,4	96,7	82,0	96,3	98,1	91,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,1	93,8	92,3	94,0	94,8	96,2	94,5	98,1	94,0	90,0	89,0	90,0	92,1	88,7	92,8	86,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
89,7	95,2	89,3	89,0	92,4	93,7	91,9	92,8	97,3	94,6	94,3	93,9	93,6	89,3	89,3

**CQS: 91,9**

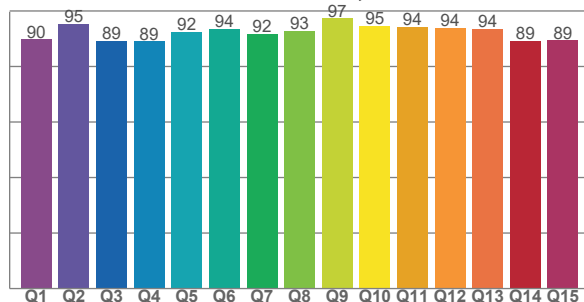

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2743 K	94,7	68,2	92,3	99,6	91,9	0,456	0,409	0,261	0,351	-0,0005







**Rf 92,3**


Fidelity index Rf

**Rg 99,6**

Gammut index Rg

Hue Bin	R <sub>f</sub>	Graphic shifts (%)	
		Chroma	Hue
1	92	-4%	1%
2	94	-3%	2%
3	92	-1%	4%
4	94	-2%	0%
5	95	-1%	2%
6	96	2%	1%
7	95	-2%	-1%
8	98	0%	0%
9	94	-1%	3%
10	90	0%	7%
11	89	3%	8%
12	90	5%	0%
13	92	3%	-5%
14	89	4%	-8%
15	93	-2%	-3%
16	86	-2%	-11%

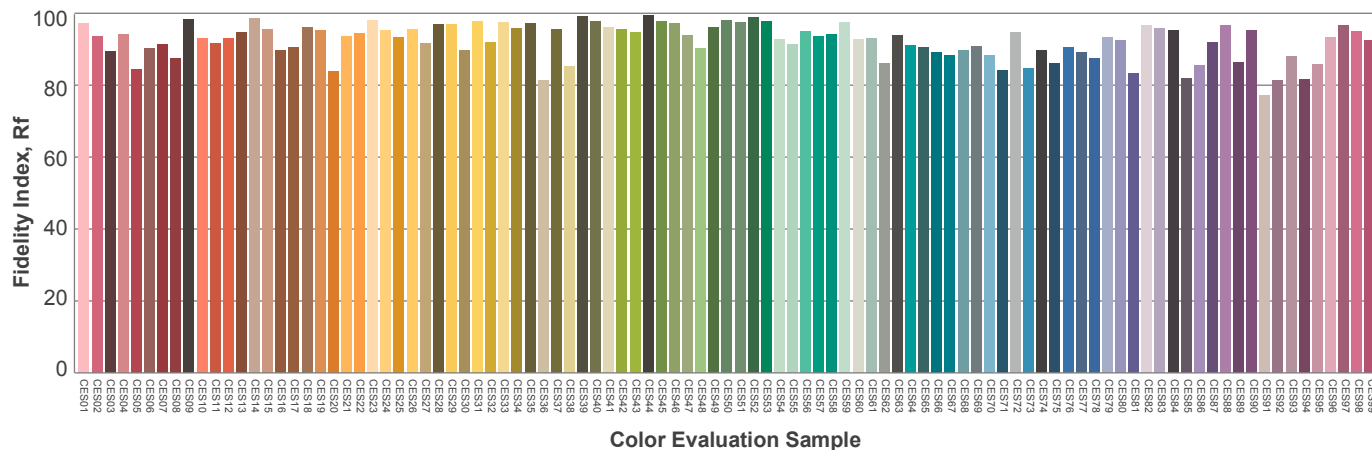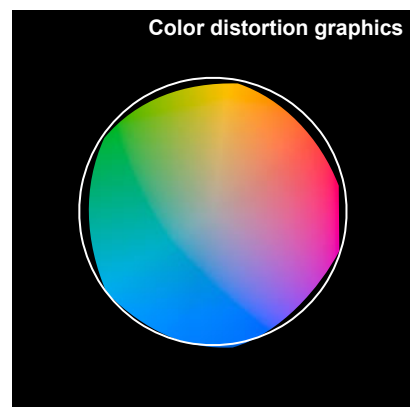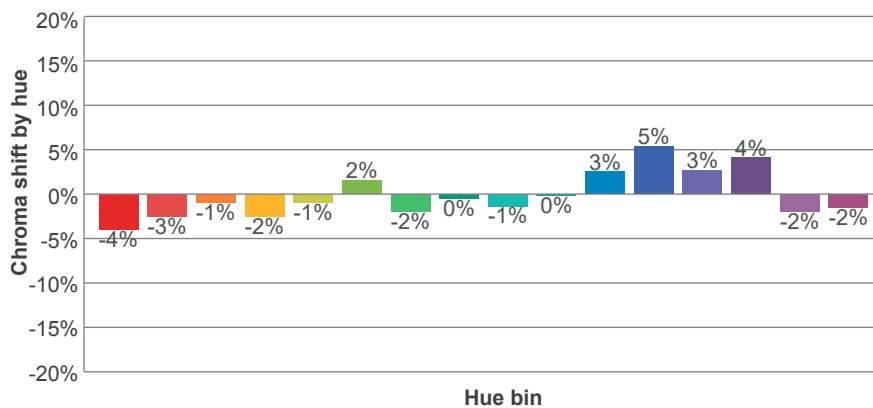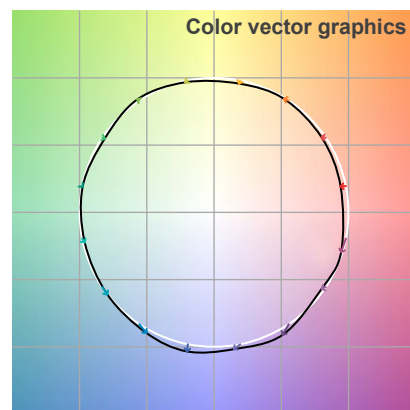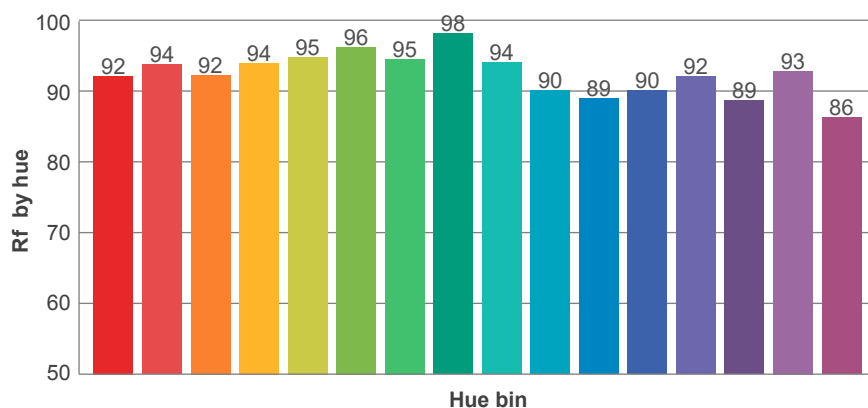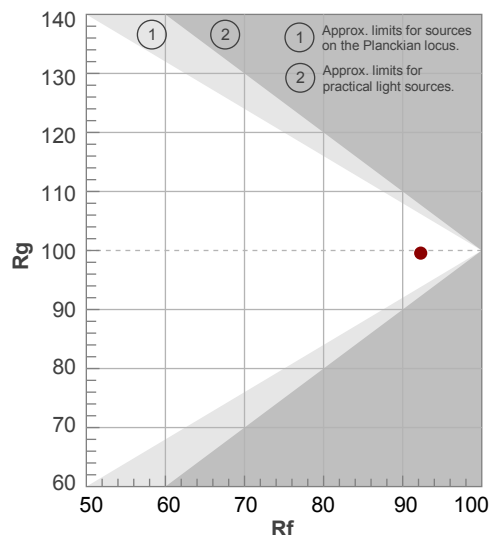

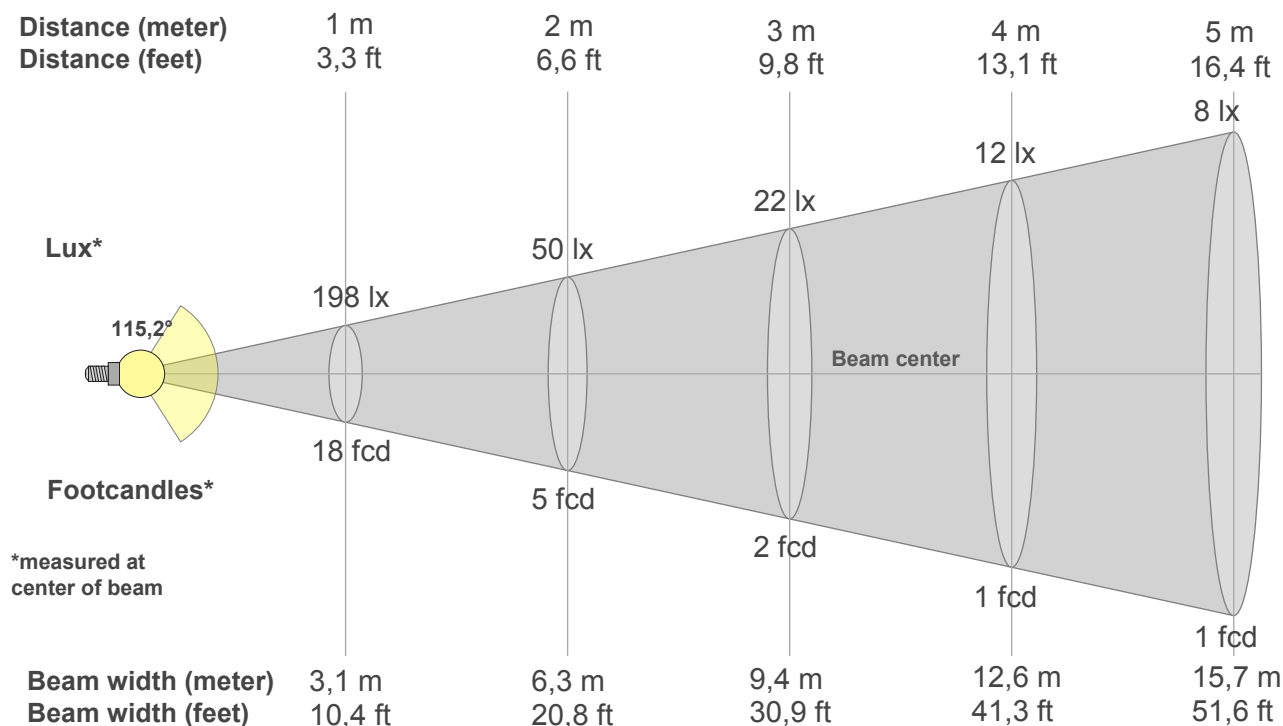

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	19,7ft	23ft	26,2ft	29,5ft	32,8ft	36,1ft	39,4ft	42,7ft	45,9ft	49,2ft	52,5ft	55,8ft	59,1ft	62,3ft	65,6ft
198lx	50lx	22lx	12lx	8lx	6lx	4lx	3lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx
18,4fcd	4,6fcd	2fcd	1,2fcd	0,7fcd	0,5fcd	0,4fcd	0,3fcd	0,2fcd	0,2fcd	0,2fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0,1fcd	0fcd

## Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
198	197	195	191	186	179	171	161	150	138	122	105	84	61	38	20	9	4	1	1
100%	99%	98%	96%	94%	90%	86%	81%	76%	69%	62%	53%	42%	31%	19%	10%	5%	2%	1%	1%

## Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
198	198	196	192	187	181	173	164	153	141	127	111	94	74	53	32	16	6	1	0
100%	100%	99%	97%	95%	91%	87%	83%	77%	71%	64%	56%	47%	37%	27%	16%	8%	3%	0%	0%

## Intensities in 180° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
198	197	195	191	186	179	171	161	150	138	122	105	84	61	38	20	9	4	1	1
100%	99%	98%	96%	94%	90%	86%	81%	76%	69%	62%	53%	42%	31%	19%	10%	5%	2%	1%	1%

## Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
198	198	196	192	187	181	173	164	153	141	127	111	94	74	53	32	16	6	1	0
100%	100%	99%	97%	95%	91%	87%	83%	77%	71%	64%	56%	47%	37%	27%	16%	8%	3%	0%	0%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
115,2°	153,6°	170,3°	81,6%	55,1%

### ISO candela diagram

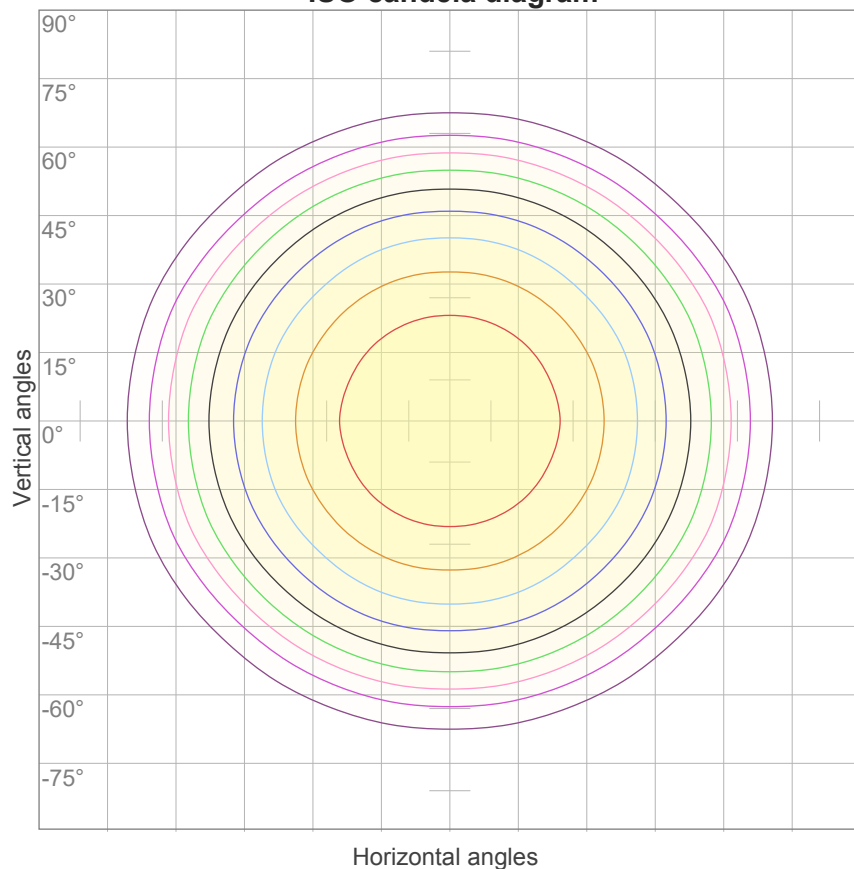


10%	20 cd
20%	40 cd
30%	59 cd
40%	79 cd
50%	99 cd
60%	119 cd
70%	139 cd
80%	159 cd
90%	178 cd

#### Conditions:

Number of c-planes: 16

Candela at center: 198 cd

### ISO lux diagram

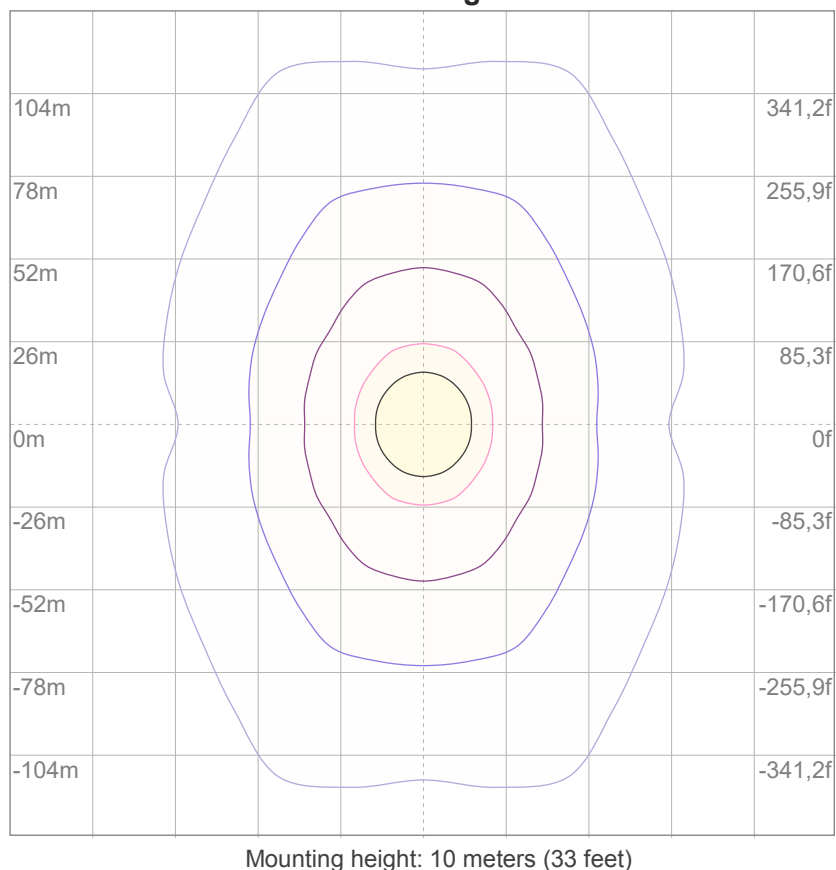

3%	59,5m lx
5%	99,1m lx
10%	0,198 lx
30%	0,595 lx
50%	0,991 lx

#### Conditions:

Number of c-planes: 16

Lux at center: 1,98 lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

### Glare Evaluation According to UGR


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	21,5	22,7	21,7	23,0	23,2	22,4	23,6	22,6	23,9	24,1
	3H	22,2	23,4	22,6	23,7	23,9	23,6	24,9	24,1	25,2	25,4
	4H	22,3	23,5	22,7	23,8	24,0	24,1	25,3	24,5	25,5	25,8
	6H	22,4	23,5	22,8	23,7	24,1	24,4	25,4	24,7	25,7	26,0
	8H	22,4	23,4	22,8	23,7	24,1	24,4	25,4	24,7	25,7	26,1
	12H	22,4	23,3	22,7	23,7	24,1	24,4	25,4	24,8	25,7	26,1
4H	2H	22,0	23,2	22,4	23,4	23,7	22,7	23,9	23,1	24,2	24,4
	3H	23,0	23,9	23,3	24,3	24,7	24,3	25,2	24,6	25,6	26,0
	4H	23,1	24,0	23,6	24,4	24,9	24,7	25,6	25,2	26,0	26,6
	6H	23,2	24,0	23,7	24,4	24,7	25,0	25,8	25,5	26,2	26,6
	8H	23,2	23,9	23,7	24,3	24,7	25,1	25,8	25,6	26,2	26,6
	12H	23,2	23,8	23,6	24,2	24,7	25,1	25,7	25,6	26,1	26,6
8H	4H	23,2	24,0	23,7	24,4	24,8	24,7	25,5	25,3	25,9	26,3
	6H	23,4	24,0	23,9	24,4	25,0	25,1	25,7	25,6	26,1	26,7
	8H	23,4	23,9	23,9	24,4	25,1	25,2	25,7	25,7	26,2	26,9
	12H	23,4	23,8	24,0	24,3	25,0	25,3	25,7	25,9	26,2	26,8
12H	4H	23,2	23,9	23,7	24,3	24,8	24,7	25,3	25,2	25,8	26,2
	6H	23,4	23,9	23,9	24,4	25,1	25,1	25,6	25,6	26,1	26,8
	8H	23,4	23,9	24,0	24,4	25,0	25,2	25,6	25,8	26,1	26,7
Variation of the observer position for the luminaire distance S											
S = 1.0H		0,2 / -0,2					0,1 / -0,1				
S = 1.5H		0,4 / -0,7					0,2 / -0,4				
S = 2.0H		1,1 / -1,7					0,8 / -1,0				
Standard table		n/a					n/a				
Correction summand		n/a					n/a				
Corrected glare indices referring to 566 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	109	105	101	97	106	102	99	95	98	95	92	94	92	89	90	88	87	84
2	100	92	85	79	97	90	84	78	86	81	77	83	78	75	80	76	73	71
3	91	81	73	66	88	79	72	66	76	70	64	73	68	63	70	66	62	60
4	83	71	63	56	81	70	62	56	67	60	55	65	59	54	63	58	53	51
5	76	64	55	48	74	63	54	48	60	53	47	58	52	47	56	51	46	44
6	71	57	48	42	69	56	48	42	54	47	41	53	46	41	51	45	41	39
7	65	52	43	37	64	51	43	37	49	42	37	48	41	36	47	41	36	34
8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	37	32	30
9	57	43	35	30	55	43	35	30	42	34	29	40	34	29	39	33	29	27
10	53	40	32	27	52	39	32	27	38	31	27	37	31	26	37	31	26	25

LAMPS (number of lamps)


## Luminaire budgetary diagram

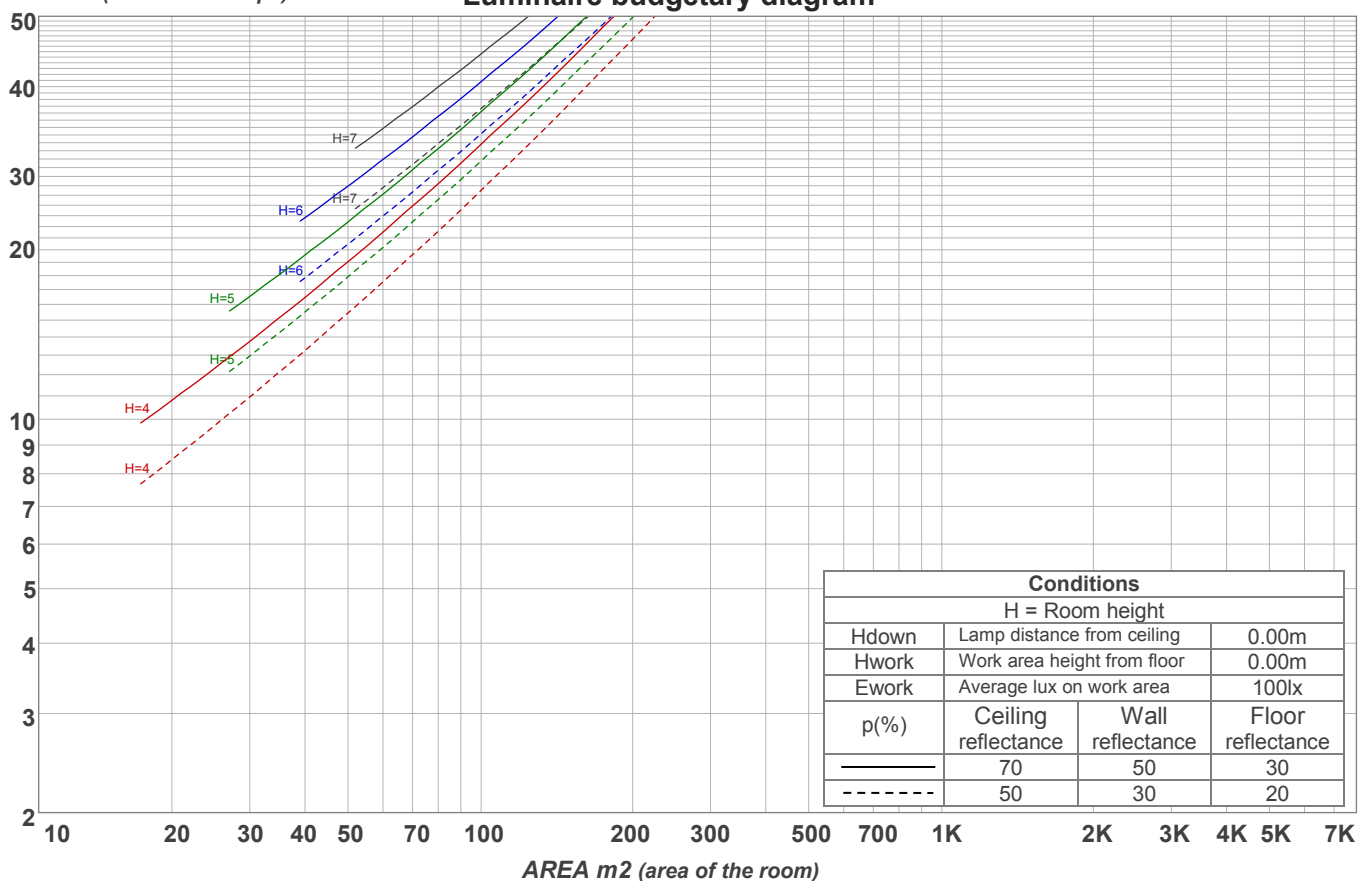

## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
18,8 lm	54,1 lm	83,0 lm	102 lm	107 lm	96,5 lm	66,9 lm	28,3 lm	6,28 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
1,22 lm	0,456 lm	0,382 lm	0,345 lm	0,235 lm	0,149 lm	0,110 lm	0,067 lm	0,023 lm

### Warmup curve

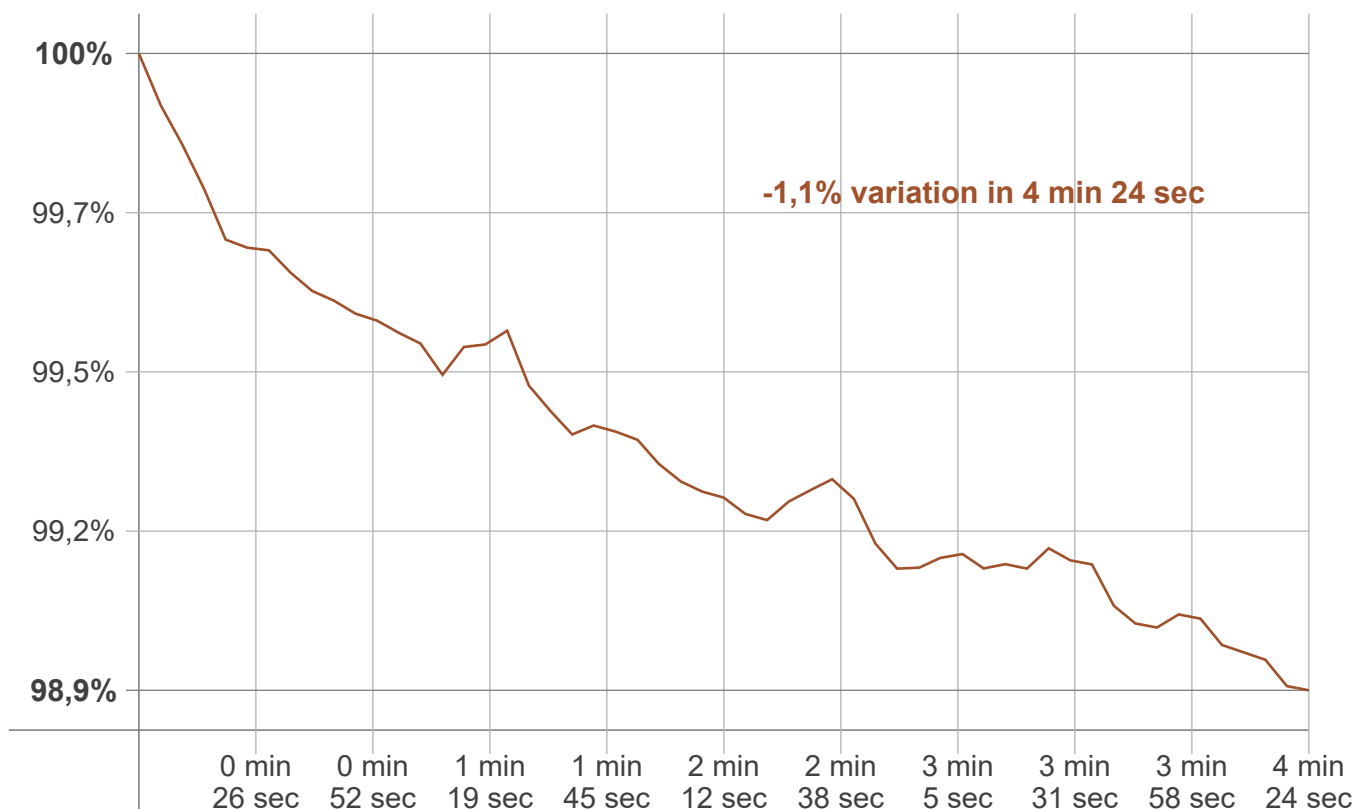

### Warmup result

Warmup time:	Not completed
Warmup variation	-1,1%

### Warmup conditions

Stable period:	15 min
Stable change max:	2,0%
Minimum time:	15 min

### Color temperature change

CCT start	CCT change	CCT end
2746 K	-3 K	2743 K

### Output change

Output start	Output change	Output end
571 lm	-5 lm	566 lm